



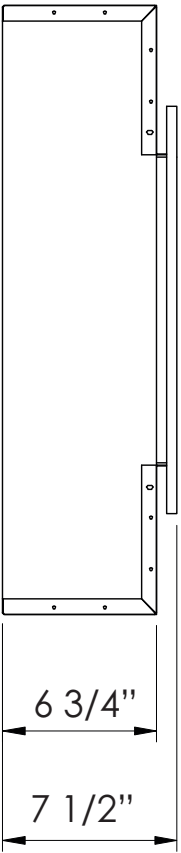
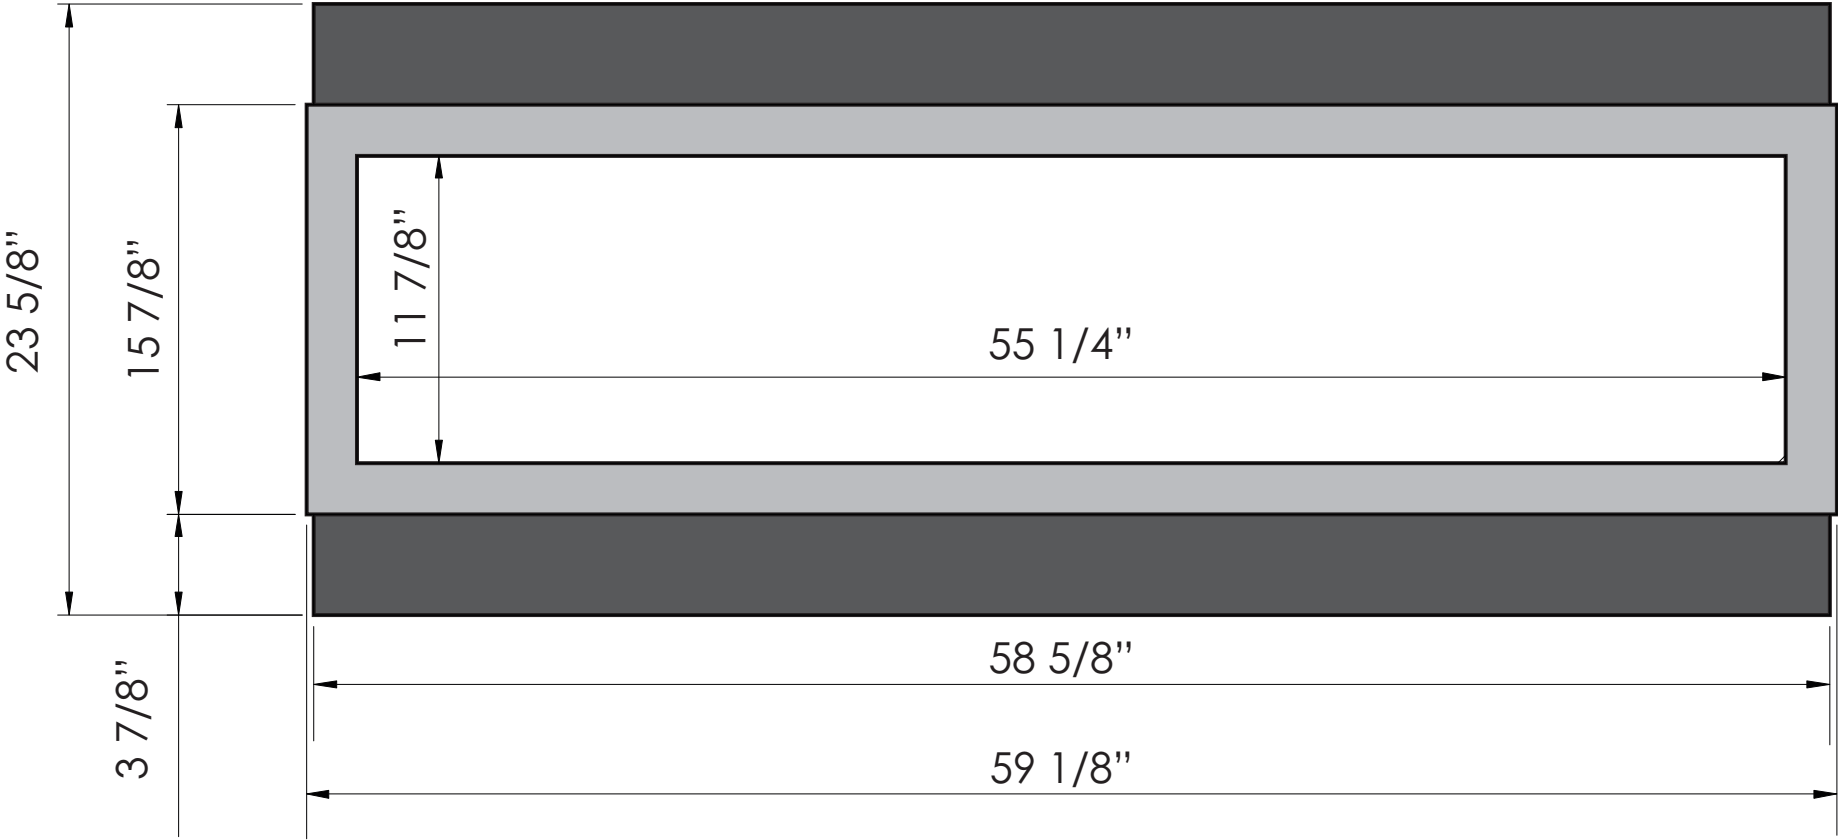




TECHNICAL SPECIFICATIONS		
VOLTS	120	
AMPS	12.5	
WATTS	1465	
HEATER	HIGH	1465 watts
	LOW	750 watts
NO HEATER	22 watts	
LAMPS	QUANTITY	LED
	WATTS	
	TOTAL WATTS	22 watts
ROTOR MOTOR	1 at 5 watts	
HEIGHT, WIDTH, DEPTH	23 5/8 x 58 5/8 x 6 3/4	
GLASS VIEWING OPENING	11 7/8 x 55 1/4"	
SURROUND SIZE	15 3/4" x 59 1/8"	
SHIPPING SIZE	25 1/2 x 69 3/4 x 9 3/4"	
SHIPPING WEIGHT	124 lbs	
GLASS FRONT	UNIT	
	Included	
PLUG LOCATION	Left Side	
CORD LENGTH	76"	
APPROX. HEATING AREA	400 sq ft	

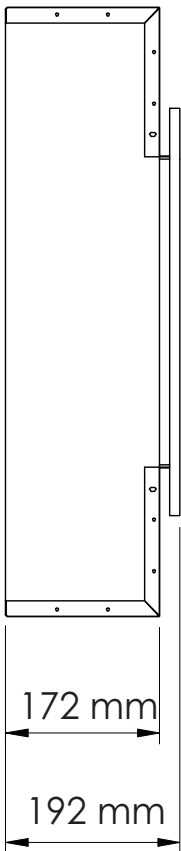

SERIES	MODEL		REV
BUILT IN	BI-60-SLIM		1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	

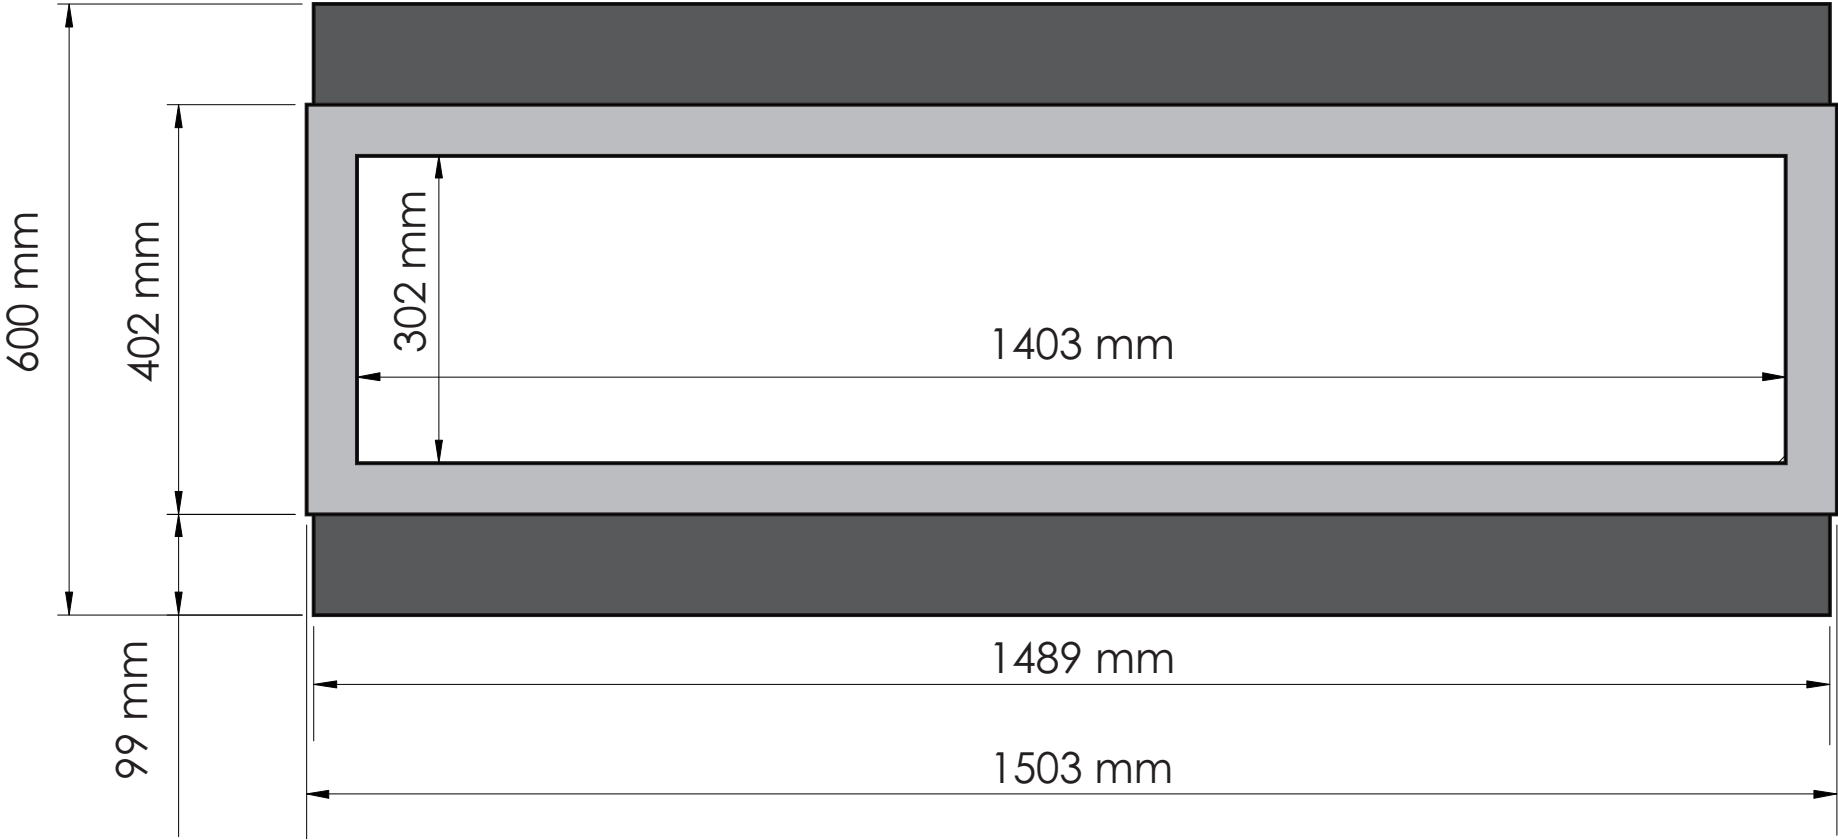

TECHNICAL SPECIFICATIONS	
VOLTS	120
AMPS	12.5
WATTS	1465
HEATER	HIGH 1465 watts
	LOW 750 watts
NO HEATER	22 watts
LAMPS	QUANTITY LED
	WATTS
	TOTAL WATTS 22 watts
ROTOR MOTOR	1 at 5 watts
HEIGHT, WIDTH, DEPTH	60 x 148.9 x 17.2 cm
GLASS VIEWING OPENING	30.2 x 140.3 cm
SURROUND SIZE	40.2 x 150.3 cm
SHIPPING SIZE	64 x 176.7 x 24.8 cm
SHIPPING WEIGHT	56 kg
	UNIT
	GLASS FRONT Included
PLUG LOCATION	Left Side
CORD LENGTH	193 cm
APPROX. HEATING AREA	37 sqm



SERIES BUILT IN	MODEL BI-60-SLIM		REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	