

# Montecito Estate™


## Wood Fireplaces Specifications

| PRODUCT REFERENCE INFORMATION<br>Model: MONTEST, Cat. No. H4842 |                        |
|-----------------------------------------------------------------|------------------------|
| Weight                                                          | 450 lbs                |
| Height                                                          | 49-3/8"                |
| Width                                                           | 46-1/4"                |
| Depth                                                           | 27"                    |
| Firebox W x H x D<br>measured in front                          | 31" x 14-1/2"<br>x 14" |
| Chimney weight -<br>Secure Temp <sup>GX</sup> * (7" dia)        | 9.5 lb/ft.             |
| Chimney weight - ACBI*                                          | 3.75 lb/ft.            |




\*Available from Security Chimneys™

| FRAMING DIMENSIONS<br>Fireplace Opening Width |         |         |
|-----------------------------------------------|---------|---------|
| A ①                                           | 46-1/4" | 1175 mm |
| B                                             | 49-3/8" | 1254 mm |
| C                                             | 42-3/4" | 1086 mm |
| D                                             | 20-7/8" | 530 mm  |
| E                                             | 93-7/8" | 2384 mm |
| F                                             | 47"     | 1194 mm |
| G                                             | 27-3/4" | 705 mm  |
| J                                             | 66-3/8" | 1686 mm |

① The front framing width (A= 46-1/4") will need to be 47" before pushing the fireplace into framing.

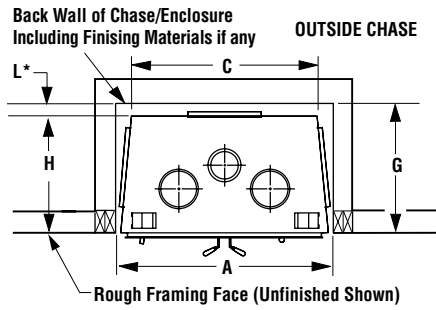

Framing Dimensions

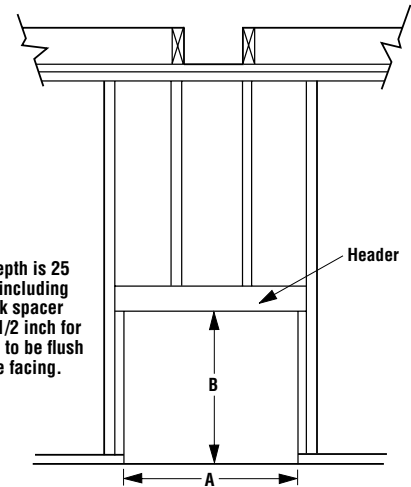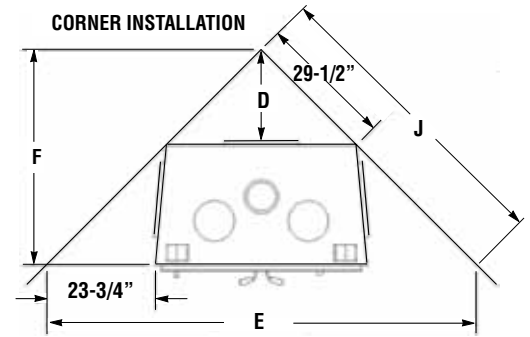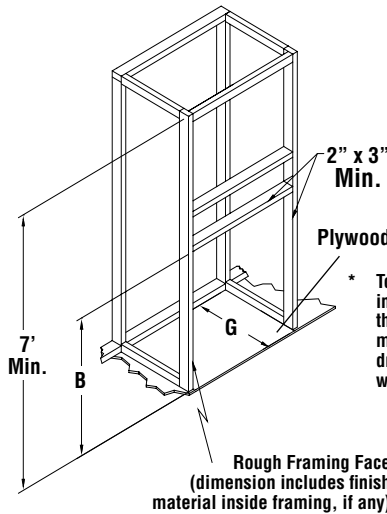

| Notes                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice. |
| All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.                                               |
| * The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.                                                                            |

### PARTS REQUIRED

- 7" diameter chimney \* - Model Secure Temp™ S-2100+, Nova Temp™ HT6000+, Secure Temp GX (U.S. only) or ACBI manufactured by Security Chimneys International only, including:
  - Chimney lengths
  - Elbows (where necessary)
  - Associated components as per installation instructions
- Decorative Door - Required (Order Separately)
  - Available in Black, Brushed Nickel or Hammered Steel - Order Separately
- Front Facade kit - Required (Order Separately)
  - Available in Black, Brushed Nickel or Hammered Steel
- UZY5 Blower (included)
- VRUW Blower Speed Control (included)
- Outside air kit (Included)

### OPTIONAL EQUIPMENT



- AC Chimney Adaptor \* (required if using AC Chimney)
- AC chimney outside air kit
- Gravity venting system
- Rigid firescreen

\*Available from Security Chimneys™



These fireplaces have been tested and listed by ITS - Listing mark, Warnock Hersey to ULC-S610 & UL-127.

Report No. 304-7213  
EPA Cert. No. 609

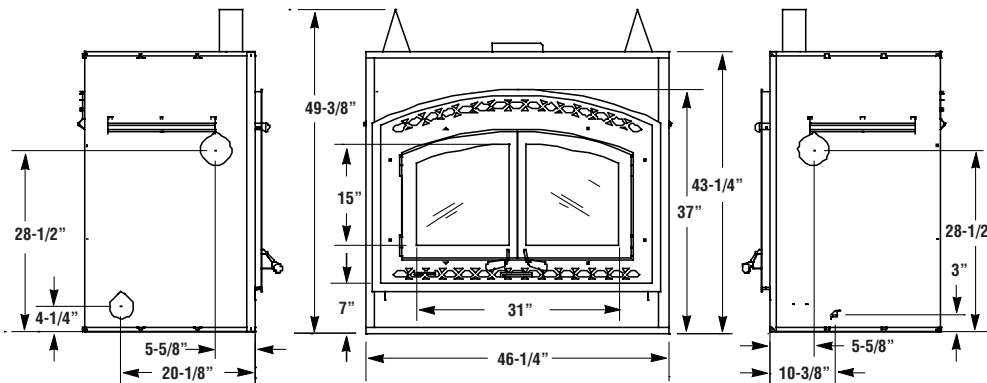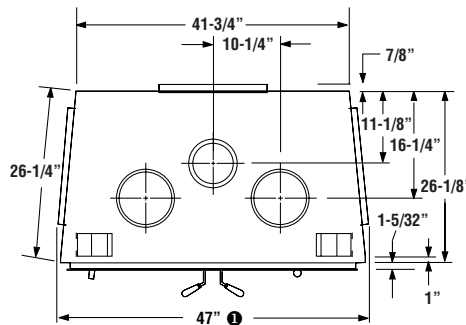



Listing Information

Fireplace Dimensions

# Montecito Estate™

## Wood Fireplaces Specifications

Typical Installations

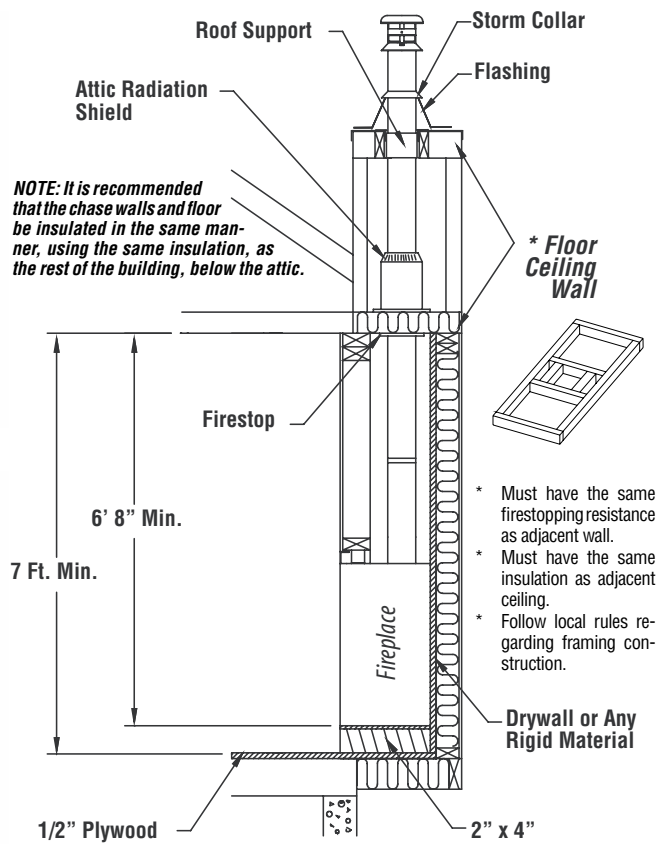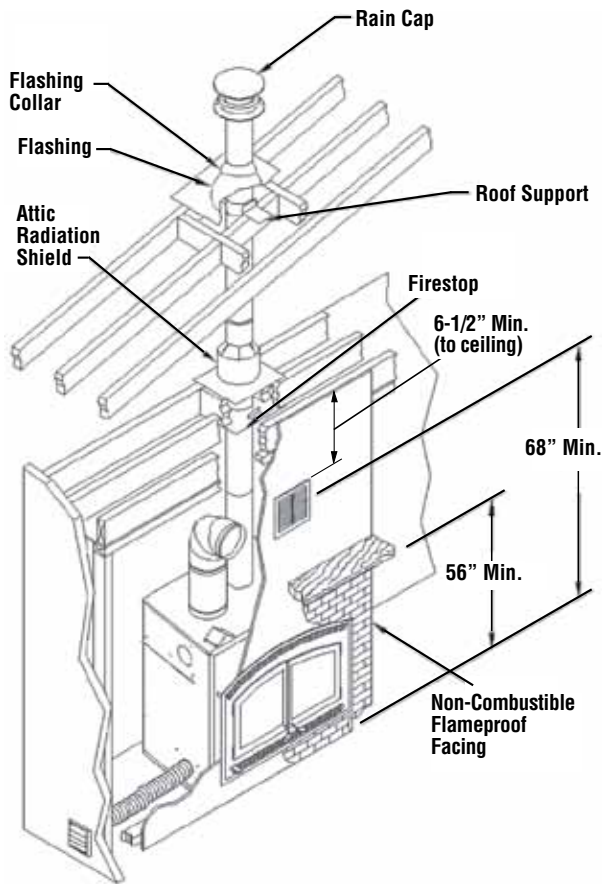

## CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

**Side wall:** (fireplace front): 24" (457 mm) measured from the fireplace side.

**Ceiling:** 6' 8" (2032 mm) measured from the base of the fireplace.

### Fireplace enclosure:

**Bottom:** 0"  
**Side:** 0" to spacer  
**Back:** 0" to spacer

**Top:** Do not fill the space above the fireplace with any material (Except the wood framing)

**Chimney:** 2" (50 mm), except for through ceiling application, ACBI chimney, 1" (25 mm) clearance.

**Mantel:** 56" (1422 mm) measured from the base of the fireplace.

Combustible Clearances

