

Montecito Estate™ CAT



EPA Wood Fireplaces Specifications

PRODUCT REFERENCE INFORMATION	
Model: Montecito Estate CAT Cat. No. F2845	
Weight	520 lbs
Firebox W x H x D measured in front	31" x 14-1/2" x 14"
Chimney weight - Secure Temp ^{GK} * (7" dia)	9.5 lb/ft.
Chimney weight - ACBI*	3.75 lb/ft.



*Available from Security Chimneys™

FRAMING DIMENSIONS Fireplace Opening Width		
A ①	46-1/4"	1175 mm
B	50"	1270 mm
C	42-3/4"	1086 mm
D	20-7/8"	530 mm
E	93-7/8"	2384 mm
F	47"	1194 mm
G**	27-1/2"	699 mm
H	26-3/4"	680 mm
J	66-3/8"	1686 mm
L*	1"	26 mm

① The front framing width (A= 46-1/4") will need to be 47" before pushing the fireplace into framing.

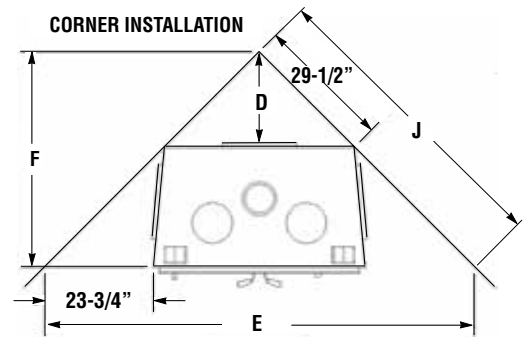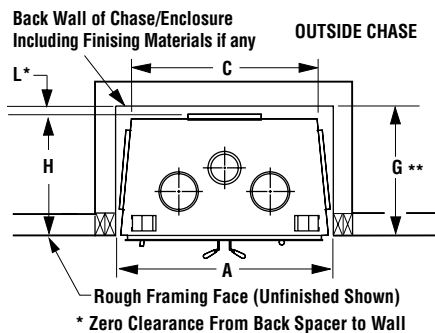

Framing Dimensions

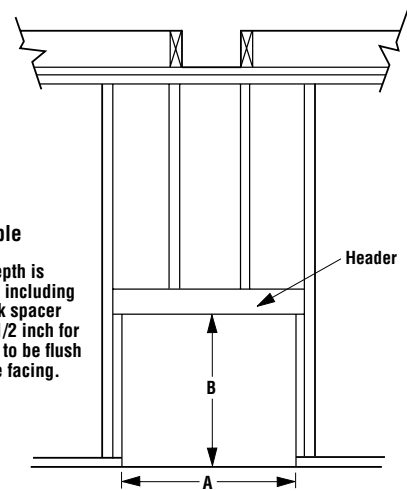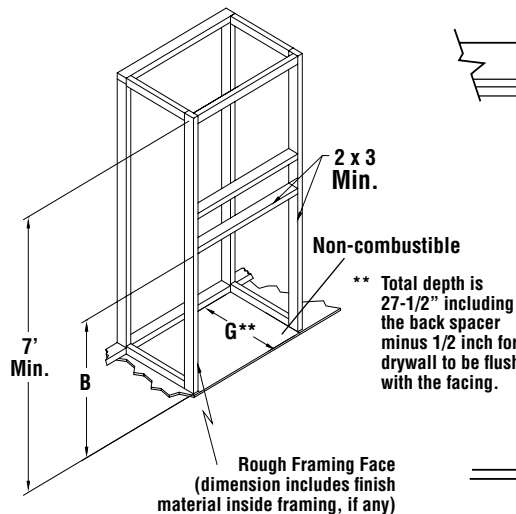

Notes

Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.


* The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.



Report No. 14-198

Listed to ULC-S610 & UL-127

EPA certification test emission value 1.3 g/hr per 2020 standard

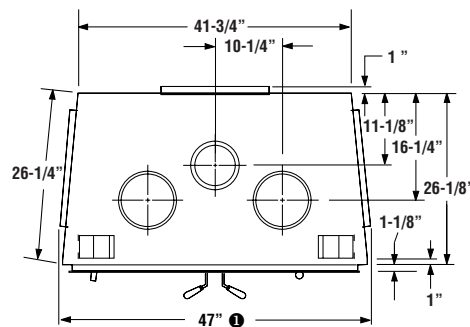

PARTS REQUIRED

- 7" diameter chimney * - Model Secure Temp^S S-2100+, Nova Temp^{HT} HT6000+, Secure Temp^{GK} (U.S. only) or ACBI manufactured by Security Chimneys International only, including:
 - Chimney lengths
 - Elbows (where necessary)
 - Associated components per installation and operation manual.
- Decorative Door - Required (Order Separately)
 - Available in Black or Hammered Steel
- Front Facade kit - Required (Order Separately)
 - Available in Black or Hammered Steel
- UZY6 Blower (included)
- VRUW Blower Speed Control (included)
- Outside air kit (Included)

OPTIONAL EQUIPMENT


- AC Chimney Adaptor * (required if using AC Chimney)
- AC chimney outside air kit
- Gravity venting system

*Available from Security Chimneys™

Page 1 of 2

Listing Information

Fireplace Dimensions

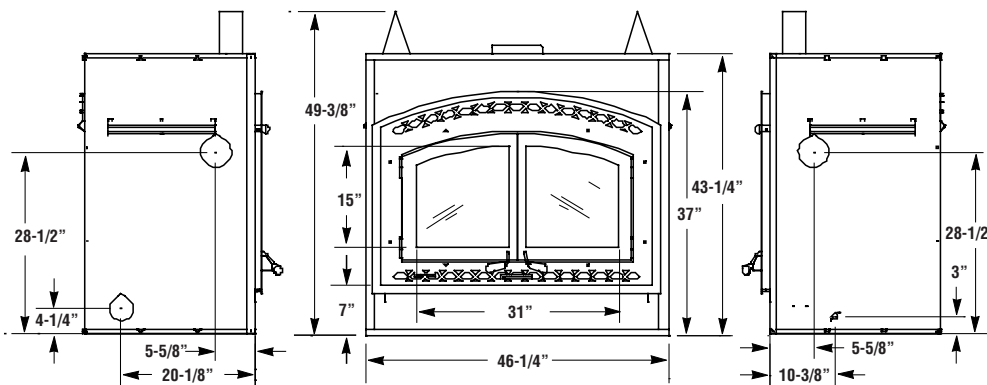



P/N 900174-00 REV. D 08/2016

astria

Obadiah's • 406-300-1776

Montecito Estate™ CAT

Typical Installations

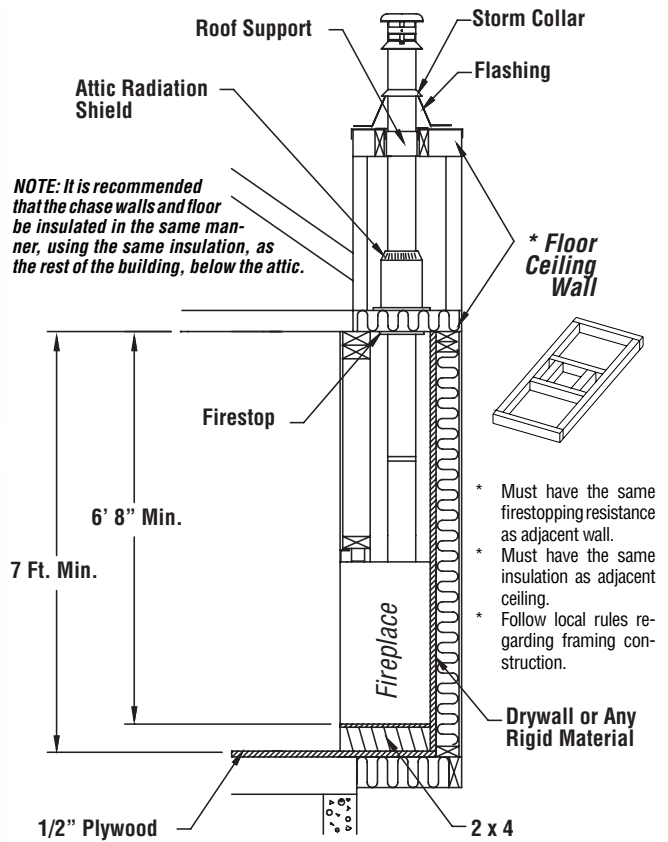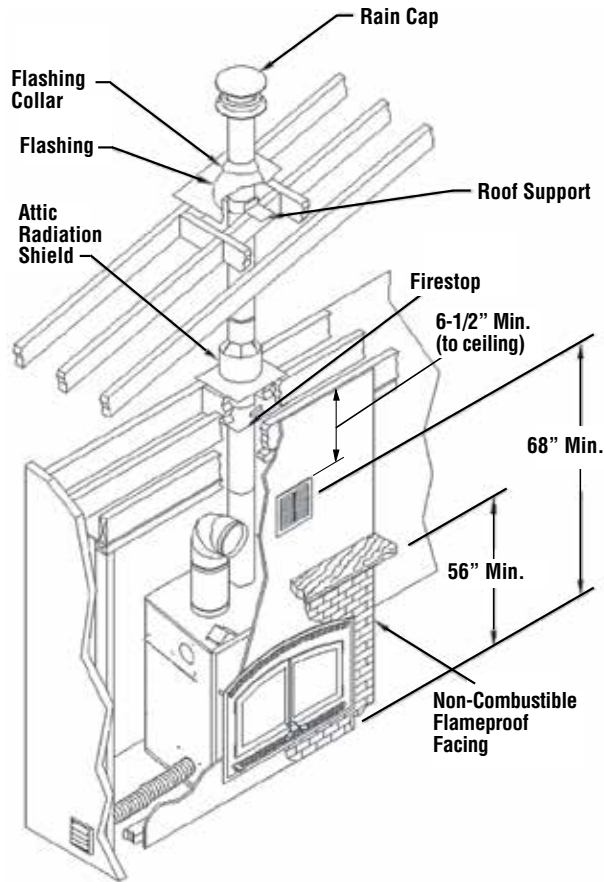

CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

Side wall: (fireplace front): 24" (457 mm) measured from the fireplace side.

Ceiling: 6' 8" (2032 mm) measured from the base of the fireplace.


Fireplace enclosure:

Bottom: 0" to Non-combustible floor
Side: 0" to spacer
Back: 0" to spacer

Top: Do not fill the space above the fireplace with any material (Except the wood framing)

Chimney: 2" (50 mm), except for through ceiling application, ACBI chimney, 1" (25 mm) clearance.

Mantel: 56" (1422 mm) measured from the base of the fireplace.

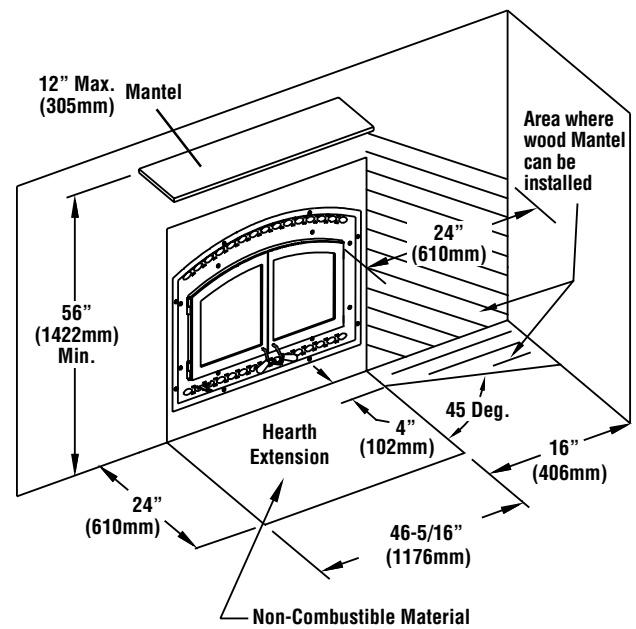

Combustible Clearances