

CARROLLTON 230

WOOD INSERTS

COUNTRY STOVES
A LIFETIME OF WARMTH



CARROLLTON 230 (Nickel Door Trim & Cast Iron Top)

LOG LENGTH: 18" max.

HEATING CAPACITY: 1,200-2,000 square feet

MAXIMUM OUTPUT: 76,000 BTU/hour

EFFICIENCY: 80%



CARROLLTON 230 (Black Door Trim & Steel Top)

STANDARD FEATURES

- ❑ Thermal Fin heat exchanger creates 32% more surface area than a standard insert design resulting in more heat entering the room.
- ❑ Air-boost timer automatically adjusts the air intake control making startup and reloading easier.
- ❑ Tall opening provides an expansive view of the burning fire.
- ❑ Ceramic glass for extra strength and optimum heat transfer.
- ❑ Unique, integral air wash system keeps the glass clean and clear for a wide-open view of the fire.
- ❑ Precision-cut, heavy-gauge steel provides dependable, long-lasting operation.
- ❑ High-density firebrick retains heat longer, resulting in increased efficiency.
- ❑ One-touch control ensures easy operation and comfort.
- ❑ Standard 150 CFM variable speed blower quickly moves heat from the insert into your room.
- ❑ Choose from several sizes of surround panel kits to match your opening size (1-required)
- ❑ Choose between a steel or cast-iron warming top (1-required).
- ❑ Optional decorative door trim in Brushed Nickel or Nickel allow customization to your style.
- ❑ EPA-certified for clean and efficient operation.
- ❑ Limited Lifetime Warranty

OPTIONS

DOOR TRIM



Black



Nickel



Brushed Nickel

TOP WARMING SURFACE



Classic Cast Iron



Solid Heavy Steel

SPECIFICATIONS

PRODUCT DIMENSIONS

	CARROLLTON 230
Front Width	36-5/8"
Rear Width (Rear Taper Width)	24-1/2" (22-1/2")
Front Height	21-3/4"
Rear Height	21-1/4"
Depth into Fireplace	15-1/2"
Flue Diameter **	6"
X = Depth onto Hearth	8-1/8"
Approximate Weight	390 lbs.

** Consult your dealer or professional installer for recommended chimney sizes for your application. C260 and C310 require 6" reducer for use with 6" chimney.
* Leveling nuts extend outside this dimension.

CLEARANCES

		CARROLLTON 230
A = Insert Top to Combustible Mantel	US	15"
	Canada	15"
B = Insert Top to Top Facing	US	13"
	Canada	13"
C = Insert Side to Side Wall		4"
D = Insert Side to Side Facing		1"
E = Hearth in Front of Insert †		16"
G = Minimum Mantel Height from Bottom of Insert		36-3/4"
H = Hearth Side to Door Opening		8"(US/CN)


† In some cases the hearth depth in front of inset may be reduced by 2" for every 2" the hearth is raised. Check the owners manual for details.

SURROUND SIZING



	CARROLLTON 230
Surround Size	26-1/2"H x 41"W
	26-1/2"H x 48"W
	31"H x 41"W
	31"H x 48"W
Able to be Trimmed	33"H x 48"W

FIREPLACE SIZING

		CARROLLTON 230
		MASONRY FIREPLACE
I	Minimum Depth	15-1/2"
J	Minimum Height	21-1/2"
K	Minimum Width	25"
L	Minimum Rear Width	22-1/2"
M	Maximum Lintel Depth	5-3/8"

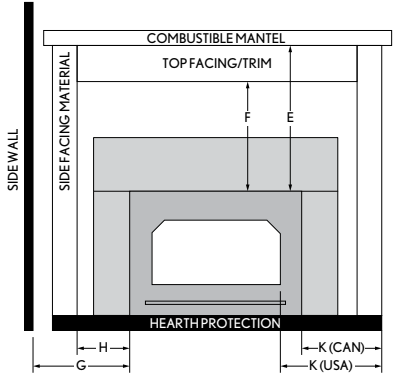

DIAGRAMS

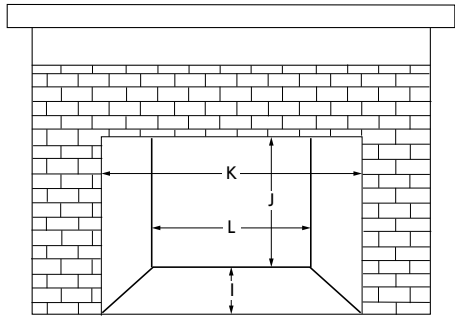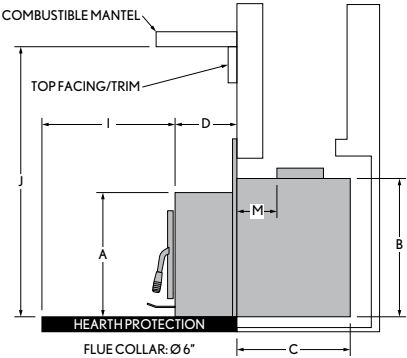

IMPORTANT NOTES:
As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated. Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.