

Georgetown™ 300 Wood Stove

Appliance Specifications - Freestanding Wood Stoves

Product Reference Information			
Cat. No.	Description	Shipping Weight	Shipping Volume
F5029	Georgetown™ 300 Wood-Burning Stove	445 lb.	20.09 cu. ft.

Stove Pipe Diameter Single Wall or Double Wall	6"
Log Length	17" W x 21" D Max.
Firebox	Volume = 2.91 cu. ft.
Glass Viewing Area	16-1/2" W x 11-5/16" H
EPA Test Load: Cord Wood: ①	29,181 BTUs/hr. 100,000 BTUs/hr.
Maximum Burn Times ①	8 hours
Heating Capacity ①	2000 to 3000 sq. ft.

The Georgetown™ 300 woodstove is safety listed with the following agency:

- PFS TECO, Tested to UL 1482-2022, CAN/ULC-S627:2023






Report No. 14-194

Certified to comply with EPA 2020 particulate emission standards using crib wood.
Emissions value: 1.8 g/hr

NOTES:

- Dimensions shown are approximations only (+/- 1/4")
- Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
- Approved for residential and alcove installations.
- Optional Kits Available:
 - Door Trim Kit
 - Blower
 - Outside Air Kit
 - Louvers
 - Leg's (choice of three style of legs in black painted, brushed nickel or nickel finish)
 - Pedestal Base
 - Ash Drawer for legs or for pedestal


① Square-foot heating capacities and burn times are approximations only. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

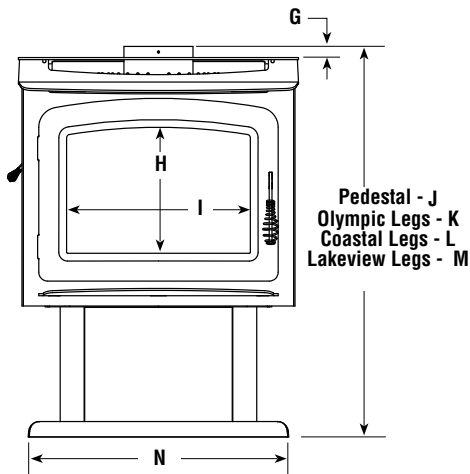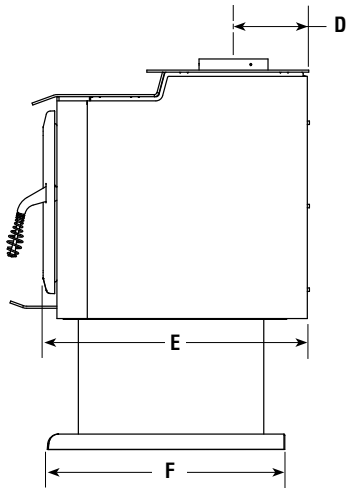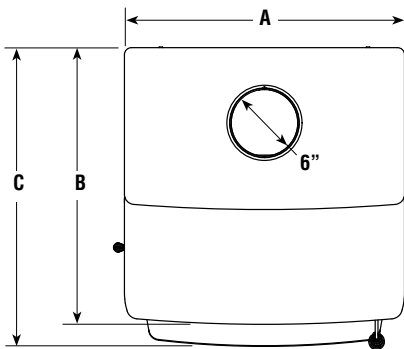

A	B	C	D	E	F	G	H	I	J	K	L	M	N
26-1/2"	27-3/8"	29-5/16"	6-5/8"	26-3/16"	21-7/16"	1-1/16"	16-1/2"	11-5/16"	36-1/8"	34-5/8"	33-5/8"	33-15/16"	23-1/8"

Georgetown™ 300 Wood Stove

Clearances

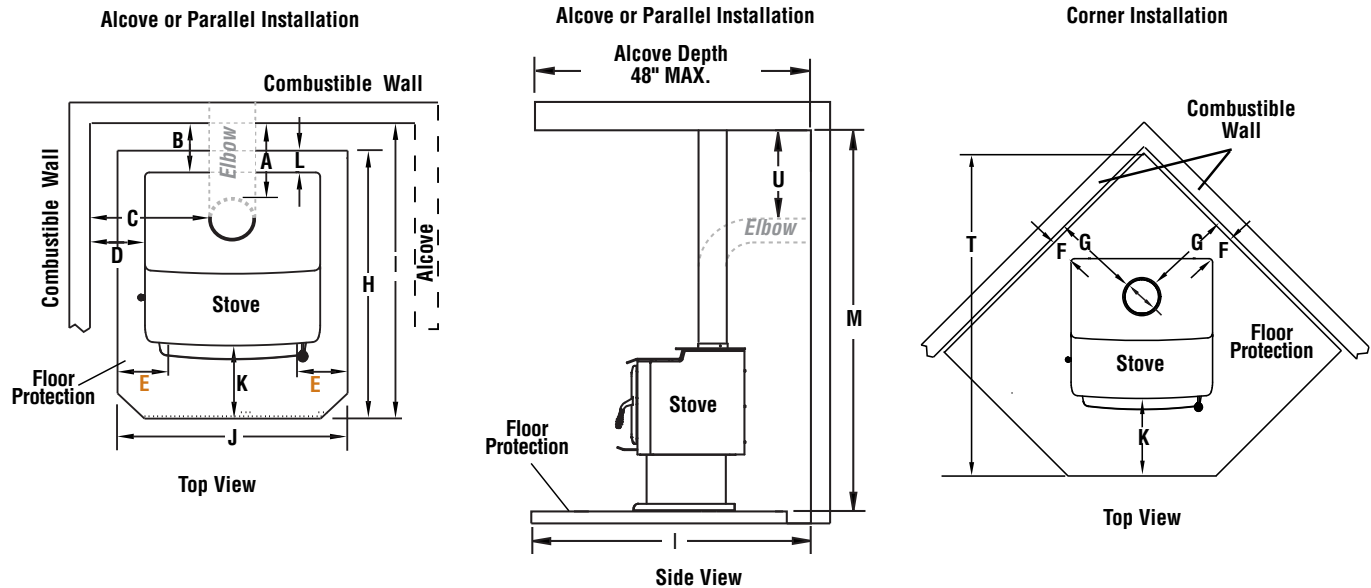

USA (inches)



PIPE	INSTALLATION	A (3)	B (1)	C (3)	D (1)	E (8)	F (1,4)	G (3,4)	H (2)	I (6)	J (2)	K (7)	L (5)	M	T (6)	U
Single Wall	Residential-Vertical Vent	16	12-3/8	25-1/8	15	8	6	17	41-1/8	53-1/2	33	16	0	84	62-7/8	N/A
Single Wall	Residential-With Elbow	19-5/8	16	26-1/8	16	8	6	17	41-1/8	57-1/8	33	16	0	84	62-7/8	19
Double Wall	Residential or Mobile Home-Vertical Vent	11-5/8	8	23-1/8	13	8	5	16	41-1/8	49-1/8	33	16	0	84	61-1/2	N/A
Double Wall	Residential or Mobile Home-With Elbow	11-5/8	8	24-1/8	14	8	5	16	41-1/8	49-1/8	33	16	0	84	61-1/2	10
Double Wall	Alcove-Vertical Vent	13-5/8	10	26-1/8	16	8	N/A	N/A	41-1/8	51-1/8	33	16	0	72	N/A	N/A

Footnotes:

- 1- These dimensions to the stove body are for reference only. Actual distances should be measured from the stove's flue collar.
- 2- Minimum noncombustible hearth pad dimensions.
- 3- Clearances to connector pipe shall be measured from the flue collar of the stove.
- 4- Not applicable to alcove installations.
- 6- Reference dimension only, to assist in planning the installation.
- 7- Measured from front of floor protection to the front of firebox.
- 8- 8" from door opening.