

SUMTER 1600

WOOD STOVES

COUNTRY STOVES
A LIFETIME OF WARMTH



Sumter 1600

LOG LENGTH: 16" max.
HEATING CAPACITY: 700-1,400 square feet
MAXIMUM OUTPUT: 55,600 BTU/hour
EFFICIENCY: 75%

OPTIONAL



150-CFM Blower

STANDARD FEATURES

- ❑ Large rectangular door provides an expansive view of the burning fire.
- ❑ Ceramic glass for extra strength and optimum heat transfer.
- ❑ Unique, integral air wash system keeps the glass clean and clear for a wide-open view of the fire.
- ❑ Precision-cut, heavy-gauge steel provides dependable, long-lasting operation.
- ❑ High-density firebrick retains heat longer, resulting in increased efficiency.
- ❑ One-touch control ensures easy operation and comfort.
- ❑ Standard black pedestal base included.
- ❑ Optional 150-CFM blower with Dial-A-Temp speed control.
- ❑ EPA-certified for clean and efficient operation.
- ❑ Limited Lifetime Warranty


Sumter wood-burning stoves offer quality construction and solid performance. Clean, simple styling and all black finish make these wood-burning stoves a complementary fit for any décor.

Our stoves come standard with a sturdy pedestal base, large door, and ceramic glass for easy viewing and exceptional heat transfer.


SPECIFICATIONS

DIAGRAMS


Top View

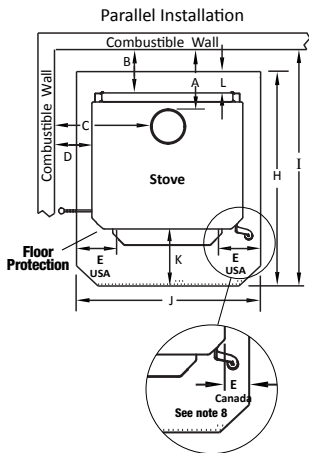

Side View

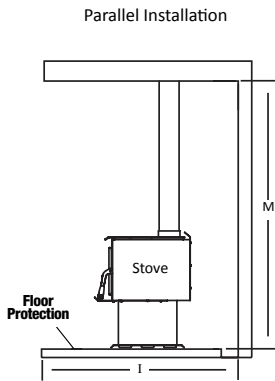

Top View

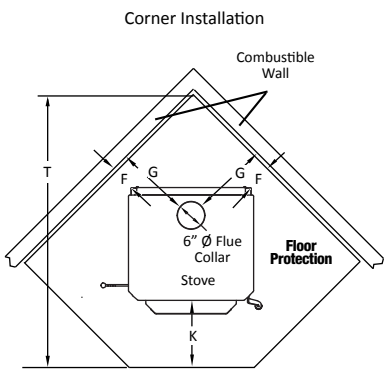

PRODUCT DIMENSIONS

	SUMTER 1600
Width	24-3/8"
Height	30-1/4"
Depth	19-3/8"

CLEARANCES

		SUMTER 1600			
		US Single-Wall Connector	US Double-Wall Connector	Canada Single-Wall Connector	Canada Double-Wall Connector
A	Flue to back wall	14-1/4"	12"	14-1/4"	12"
B	Stove back to wall	22-1/2"	9-3/8"	11-5/8"	9-3/8"
C	Flue to side wall	11-5/8"	19"	22-1/2"	19"
D	Stove side to wall	13-3/16"	9-5/8"	13-3/16"	9-5/8"
E†	Door opening/hearth pad	8"	8"	8"	8"
F	Stove back corner to wall	9"	6"	9"	6"
G	Corner, flue to wall	18"	15"	18"	15"
H	Hearth pad depth	37-7/16"	37-7/16"	47-7/16"	47-7/16"
I	Hearth front to back wall	49"	46-3/4"	51"	48-3/4"
J	Hearth pad width	34-3/4"	34-3/4"	40-7/8"	40-7/8"
K	Stove door to hearth front	16"	16"	18"	18"
L	Stove back to hearth back	0"	0"	8"	8"
M	Ceiling height	96"	96"	96"	96"
N	Corner, hearth pad depth	61-1/2"	57-5/16"	63-1/2"	59-5/16"

† USA = 8" (200mm) from door opening
Canada = 8" (200mm) from sides and back of unit

IMPORTANT NOTES:
As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer. Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated. Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.