
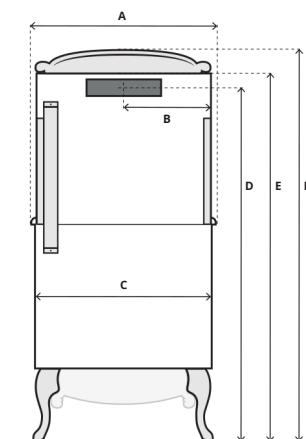
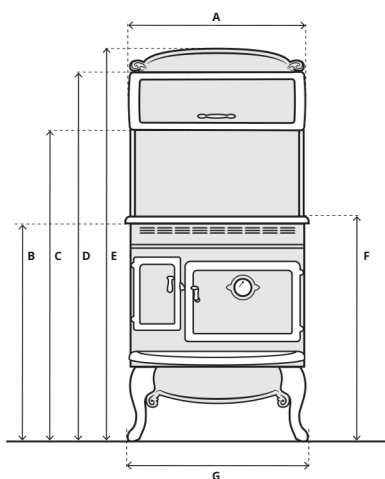


1850

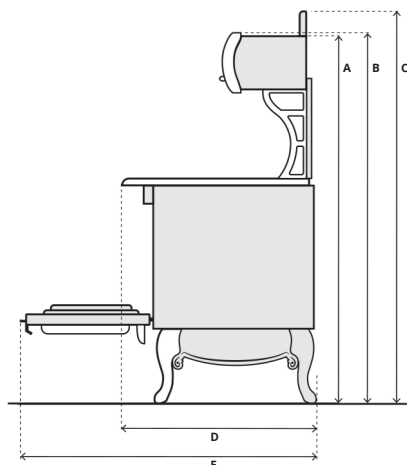

A	Height to top of upper cabinet*	63 7/8"
B	Height to top of upper cabinet door frame*	63 1/2"
C	Height to top of crestring*	67 7/8"
D	Depth from back wall to front of trim rail	30 1/4"
E	Depth with oven door open	48 1/2"

* Subtract 2 inches from all height values if the short leg option is used.

A	Width of upper cabinet	29 1/2"
B	Height to bottom of trim rail*	36 1/2"
C	Height to bottom of upper cabinet*	53 7/8"
D	Height to top of upper cabinet door frame*	63 7/8"
E	Height to top of crest*	67 7/8"
F	Height to smoothtop cook surface*	37 3/4"
G	Width of trim rail	30 1/2"

* Subtract 2 inches from all height values if the short leg option is used.

A	Width of trim rail	30 1/2"
B	Width to middle of exhaust outlet	15 3/8"
C	Width of main body of range	28 1/2"
D	Height to center of exhaust outlet*	62 1/2"
E	Height to top of upper cabinet*	63 7/8"
F	Height to top of crest*	67 7/8"

* Subtract 2 inches from all height values if the short leg option is used.

OVEN

Electric Self-Cleaning Convection Oven (4.0 cu. ft.)
Oven Size: 25" W x 16" H x 16 5/16" D

Electronic Oven Control Yes

Delayed Start Baking Yes

Dual Element Baking Yes

Variable Temperature Broil Yes

Door Activated Oven Light Yes

Heavy Duty, Plated Oven Racks Yes

POWER RATING

Power Source (208 to 250V) appliance rating 240V-30A

SHIPPING WEIGHT

390 lbs

RANGETOP

Electric High-speed Radiant Elements under glass (ST) Optional

Induction Elements Optional

UPPER CABINET

350 CFM Exhaust Fan standard (recirculating and outside vent) Yes

520 CFM In-line Exhaust blower (outside vent only) Optional

Cooking Surface Light Yes

"Feather Touch" Tempered Glass Oven Control Panel Yes



elmirastoveworks.com

RANGE HOOKUPS

Electrical Cords and Gas Line Connections Electrical receptacles and gas piping should be located in the center of the opening, approximately 6" above the floor.

RANGE EXHAUST LOCATION

(See owner's manual for more detail.)

The rectangular duct opening in the back of the cabinet is centered 62 1/4" from the floor (60 1" with optional short legs) and 15/8" in from the left side of the range cooktop. If you are ducting the exhaust into a rectangular duct in the wall behind the stove, the drywall opening should be 3 3/8" X 10".

If you require an inline or outside wall-mounted blower, please specify when ordering the range (it will be built differently).

If you wish to create an antique "stovepipe" look, Elmira can cut a round hole in the top of the upper cabinet, to which your stove (vent) pipe can be attached.

This option requires the optional inline blower.

4

3



elmirastoveworks.com