


1



2

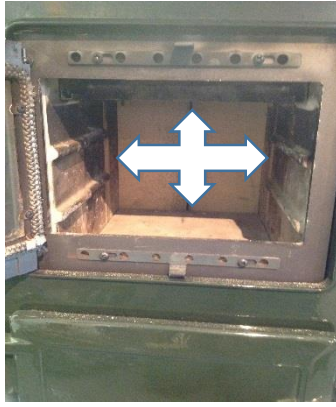

3



4



Procedure for boiler installation.

990/plus1.

Before proceeding please ensure you have access to the left hand side and rear of the appliance.

1. Remove LHS and rear panel and then remove the internal fire bricks.

2 Undo the six 10mm headed bolts and remove.

3 Remove the rear blanking plate through the front of the fire box.

4 Before fitting the boiler peel back the insulation blanket from the boiler opening.

5



6



7



5. Insert the boiler through the front of the firebox door and then fasten with the six bolts.

6 Make sure that the boiler is to the rear of the cooker and the boiler connections are to the left of the appliance.

7 Replace all the firebricks except for the two at the rear of the firebox.

8 Finally seal the joint where the boiler passes through the rear of the firebox with fire cement, wrap the insulation blanket back around the boiler and replace the side and rear panel. Remember to knock out the side panel blanking plates for the pipe connections.