

FIRE CHIEF 300

FC300F WOOD BURNING FURNACE

EXCEPTIONAL QUALITY AT AN AFFORDABLE PRICE

CONSTRUCTION

High grade, heavy gauge steel, continuously welded for maximum structural strength.

CAST IRON GRATE

Allows fine ash to drop into ash pan and leave the hot coals in the firebox.

BLOWER SYSTEM STANDARD

Thermostatically controlled blower with optional filter box delivers warm air, reducing the cost of heating your home.

PRE-WIRED ELECTRICAL SYSTEM


Pre-wired for your convenience, reducing installation time and expense.

REMOVABLE ASH PAN

For safety and convenience.


OPTIONAL ACCESSORIES

• Water Coil with Hole Saw • 8" Back Draft Damper • Filter Box

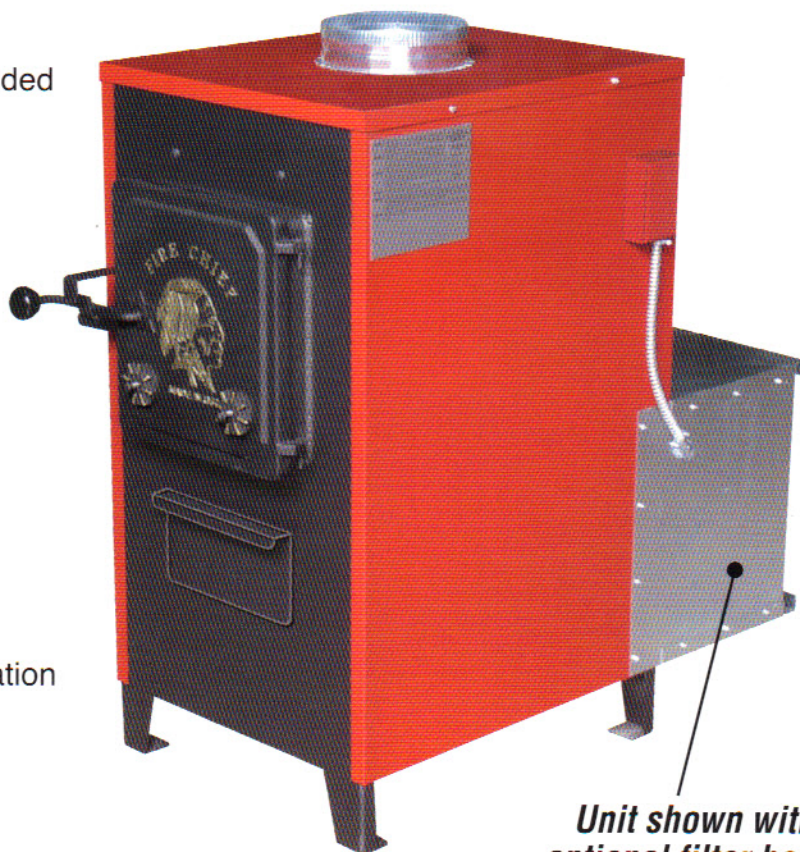

Unit shown with optional filter box.
Requires 16" x 20" x 1" filter.

TYPICAL INSTALLATION WITH EXISTING GAS OR OIL FURNACE
(use only with Class "A" all-fuel chimney)

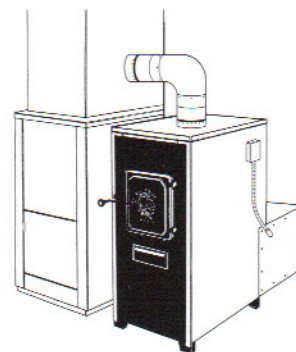


Manufactured by:

FIRE CHIEF INDUSTRIES
7280 Old State Route 21
Barnhart, MO 63012
Phone: 636-942-4747 or 800-875-4788
Email: info@firechiefwoodfurnance.com
www.firechiefwoodfurnance.com

Model FC300F Specifications	
Weight	260 lb. approx.
Height	40.5"
Width	20"
Depth	24"
Log Size	22"
Fire Chamber Volume	4.00 cu. ft.
BTUs - Maximum	80,000 approx.
Heating (Sq. Ft.)	up to 1,200
Flue Size	6"
Blower Capacity	490 cfm
Hot Air Plenum Size	8" round
Warranty - Firebox	5 year limited
Warranty - Grates, Casting	5 year limited
Door Size	13"x14"
Height to Center of Flue Collar	35.25"



Authorized Dealer

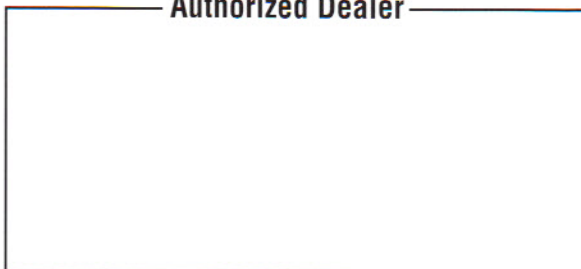

The BTU ranges and heating capacity specifications are provided as guidelines only and in no way guarantee the output or capacity of the units. The actual BTU output depends on the type of fuel being burned and its conditions, the draft adjustment and the chimney that the unit is hooked up to. The actual area that the units will heat depends on factors such as the conditions of the building, heat loss, type of construction, amount of insulation, type of air