

Castleton TruHybrid™ Wood Stove



CASTLETON TruHybrid™ MODEL 8031 MATTE BLACK + SOAPSTONE



Castleton featured in Matte Black.

FINISH OPTIONS:



Matte Black





Brown Majolica Enamel



Seafoam Enamel





CLEARANCE TO COMBUSTIBLE MATERIALS



	Single-wall connector pipe, no rear heat shield	Double-wall connector pipe*, with rear heat shield
A	17"	17"
B	15"	8"
C	20"	13"
D	8"	8"
E	20.5"	20.5"

Minimum Hearth Protection US/Canada:
Ember Protection Only

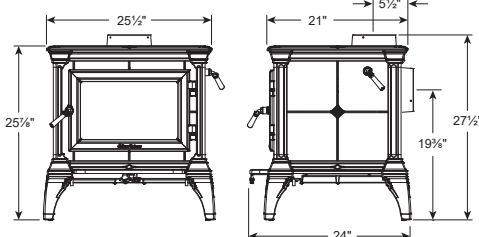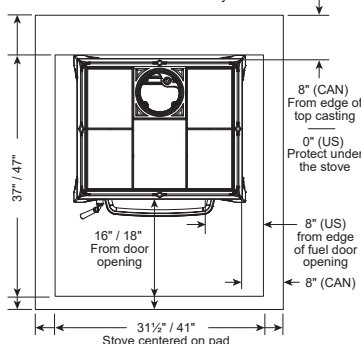

Note: Clearance measurements refer to the top of the stove.

* Connector pipe clearances may vary. Refer to manufacturer's specifications.

Note: Always refer to the HearthStone Owner's Manual and the local Authority Having Jurisdiction in your area for the specific installation requirements for your product.

Burn Wise

Program of U.S. EPA

This wood-burning appliance meets 2020 U.S. Environmental Protection Agency clean air standards.

CASTLETON 8031

TruHybrid™

- **TruHybrid™ Combustion System**
Clean burning, uber-efficient, burn times up to 20 hours.
- **Single Lever Air Control**
Easy operation, consistent performance
- **Easy Catalyst Control Handle**
Open side lever for smokeless startups, close for long, efficient fires
- **Durable Construction**
1 1/4" soapstone with iron protectors ensure a lifetime of trouble free service
- **Top Or Rear Flue Exit**
Flexible installation, free standing or hearth configuration with a cooking plate

SPECIFICATIONS

Burn Time	20+ hrs
EPA Certified	0.69 g/hr
Heats up to	1,500 sq ft
Firebox Capacity.....	1.9 cu ft
BTU	Up to 45,000
Efficiency	83% LHV, 77% HHV
Maximum Log Length.....	18"
Flue Exit & Diameter.....	Top or Rear - 6"
Ash Pan.....	n/a
Actual Weight	464 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

ACCESSORIES

Rear Heat Shield	90-68300
Convection Blower.....	90-57210
Outside Air Adapter.....	90-53300
Spark Screen.....	90-69300