



FDV200S

FREE-STANDING **DIRECT-VENT** GAS STOVE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

The unit illustrated is the FDV200SN Free Standing Stove (Natural Gas).

Obadiah's • 406-300-1776



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com

The FDV200S Direct Vent model provides sealed combustion where it draws outside air for combustion. This model can be vented either horizontally or vertically.

SPECIFICATIONS

Model	FDV200SN	FDV200SLP
	FDV200SNE2	FDV200SLPE2
Fuel	Natural	Propane
Input Max	28,500 BTU	26,000 BTU
Input Min	19,500 BTU	20,000 BTU
FE (P.4.1-15)	66.14%/68.56%	67.47%/69.89%

Minimum Clearances to Combustibles:

6" from side of unit
3" from back of unit
3" from side of unit in corner

Alcove Installation:

30" depth (max.)
56" height (min.)
53" width (min.)

STANDARD FEATURES*

- Millivolt or IPI valve system allows operation during a power failure with Hi-Low heat and flame adjustment
- Proflame II (PF2) models include Remote Control – features flame, fan, thermostat, smart thermostat and battery backup
- Dual burner system, with realistic flame pattern
- Heat radiating ceramic glass
- Mobile home approved
- Approved for installation in a bedroom or bed sitting room
- Cast Oak Log Set with glowing embers*
- Safety Screen Barrier**

OPTIONAL FEATURES

Fan Kit

Heat activated with variable speed control

Brick Refractory Liner

3 pieces

Thermostat

Wall Mount Millivolt / Programmable Thermostat

Remote Control (Millivolt)

On/Off, Thermostat On/Off,
Thermostat On/Off Modulating.



Safety Screen Barrier



PF2




PF1 or MV



GFRC, MV or PF1

**All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier

SIZING AND DIMENSIONS

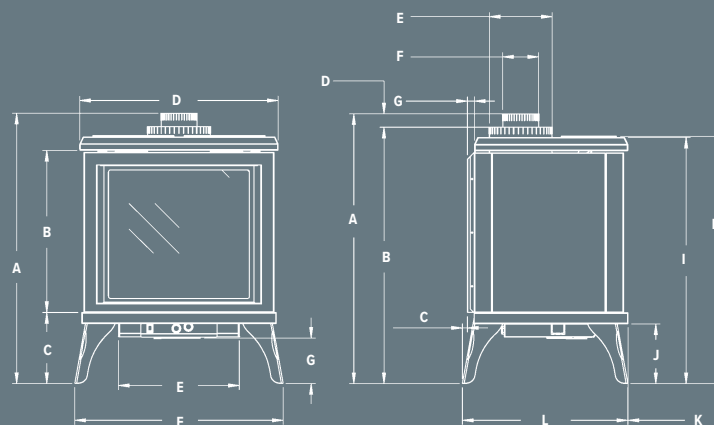

FRONT VIEW

A 30 9/16"
B 18 1/8"
C 8 5/16"
D 22 5/32"
E 13 1/2"
F 23 13/32"
G 5 7/16"

SIDE VIEW

A 30 9/16"
B 29 1/16"
C 5/8"
D 1 1/2"
E 7"
F 4"
G 25/32"
H 28 1/32"
I 27 29/32"
J 7 1/16"
K 7/32"
L 18 19/32"



The unit illustrated is the FDV200SN Free Standing Stove (Natural Gas), LOGC200 Log Set (Cast Split Oak with glowing embers), FDV200RL Refractory Brick Liner.

With a direct vent appliance you can vent either through the side wall above the unit or straight up through the roof.

Canada

ENERGUIDE

Look for the **EnerGuide** Gas Fireplace Energy Efficiency Rating in this brochure

Based on CSA P.4.1-15



FOR CALIFORNIA RESIDENTS ONLY:

WARNING! This product can expose you to chemicals including Carbon Monoxide, that is an externally vented by-product of fuel consumption, which is fatal known to the State of California to cause birth defects or other



*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.
Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation. Certified for USA and Canada to: ANSI Z21.88-2017 / CSA 2.33-2017, CSA 2.17-2017



MADE ENTIRELY IN CANADA - EACH KINGSMAN FIREPLACE

Obadiah's • 406-300-1776