
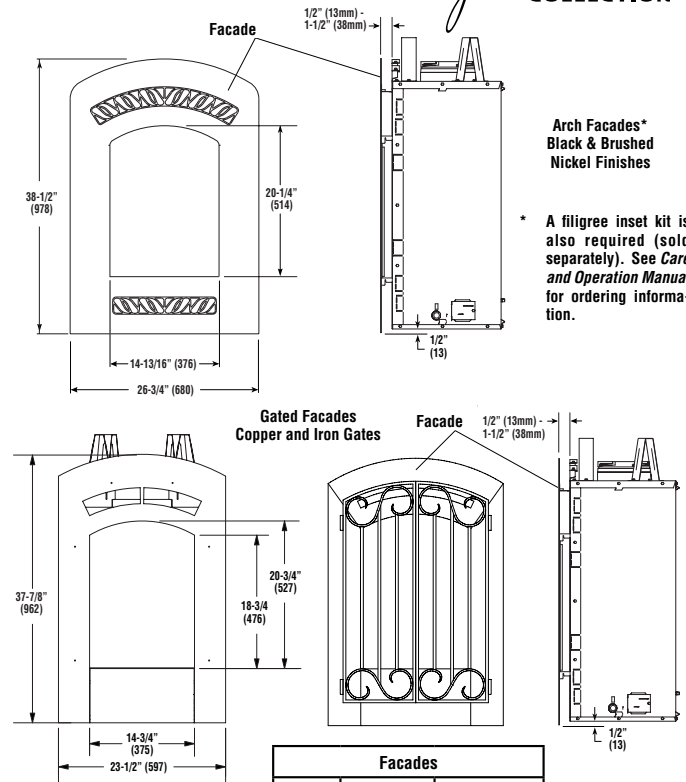


ADAGIO™-MN / ADAGIO-MP / ADAGIO-EN

Appliance Specifications - Adagio Series Direct Vent Fireplace Heaters

DAVE LENNOX
signature
COLLECTION

Fireplace Dimensions - Inches (millimeters)

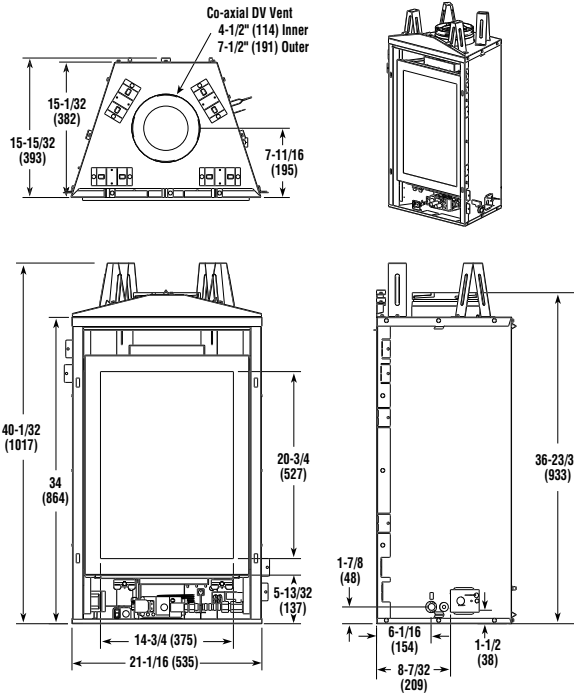

Notes

Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.

** With the facade installed (required - sold separately), the appliance base will need to be elevated a minimum of 3/4" above the floor to allow for the proper fit of the facade (i.e. use 3/4" board minimum as platform).

Facades		
Cat. #	Model	Description
H5773	ADAGIO-AG	Arch Black
H5774	ADAGIO-PF	Arch Br. Nickel
H5775	ADAGIO-IG	Iron Gates
H5776	ADAGIO-CPD	Copper Gates

Corner Framing Dimensions - All Models


	A	B	C	D	E
in.	22-1/8	41-5/8	29-1/2	10	20-7/8
mm	562	1057	749	254	530

Framing Dimensions - All Models

	A	B	C	D
in.	22-1/8	40-1/4	15-3/4	44-1/8
mm	562	1022	400	1121

Top Vent With Horizontal Termination In A Corner


Corner Framing With SV4.5HT-2 Termination

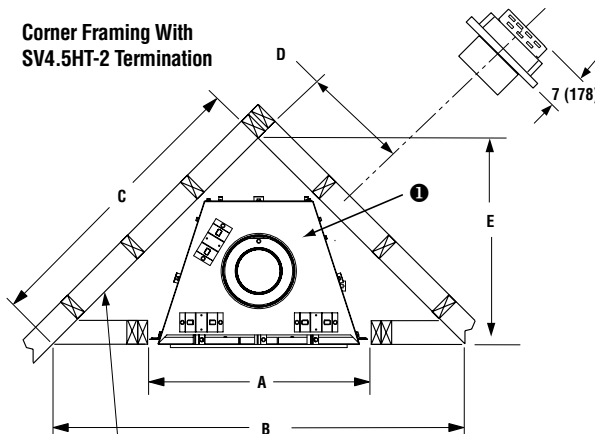

① When installing in a corner configuration, one of the rear stand-offs will need to be removed.

VENT FRAMING - TOP VENT WITH ONE 90° ELBOW

2 x 4 Header must be installed, vertical as shown to allow proper clearance from venting components to combustible header.

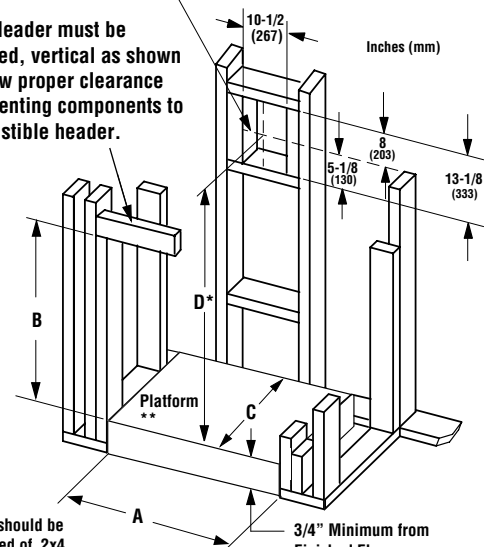

Framing should be constructed of 2x4 or larger lumber

ADAGIO™-MN / ADAGIO-MP / ADAGIO-EN


Listing Information

Input (BTU) - Millivolt Models		
Natural (NG) & Propane (LP) Gas		
Models	Fuel	Input Rate (BTU / HR)
Adagio-MN	NG	13,000 (10,000 Low)
Adagio-MP	LP	13,000 (10,000 Low)

Tested to ANSI Z21.88 (in Canada, CSA-2.33), and CAN/CGA-2.17-M91 in both USA and Canada, as vented gas fireplace heaters.

Tested & Listed By
OMNI-Test Laboratories, Inc.
Report No. 116-F-48-5

Input (BTU) - Electronic Models		
Natural (NG) & Propane (LP) Gas		
Models	Fuel	Input Rate (BTU / HR)
Adagio-EN	NG	13,000 (10,000 Low)
Adagio-EP <i>if field converted</i>	LP	13,000 (10,000 Low)

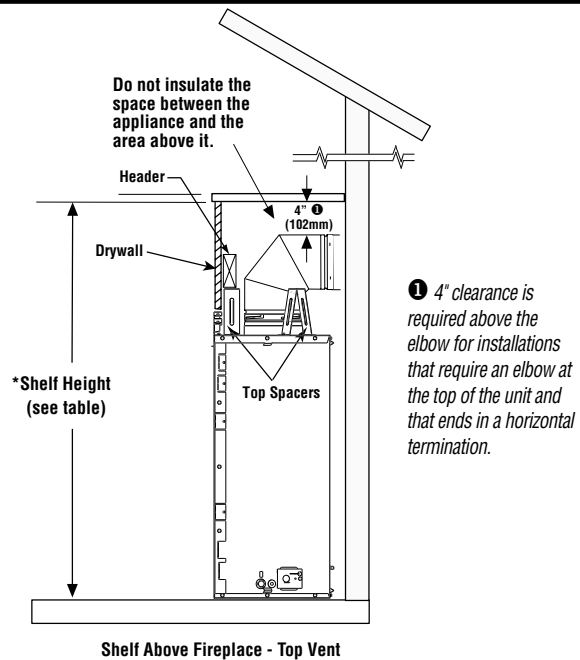


Shelf Height

Models	Combustible Shelf Height - Inches (millimeters)	
	Top Vent - with One 90 Degree Elbow	
Adagio-MN Adagio-MP Adagio-EN	Secure Vent	Secure Flex (flex elbow)
	*52 (1321)	*53-3/4 (1365)


* Includes 4" clearance to combustibles (required above vent components)

Clearances

Minimum Clearances Inches (millimeters)	
Back	1/2 (13) - 0 (0) Spacers
Sides	1/2 (13) - 0 (0) Spacers**
Top Spacers	0 (0)
Floor	0 (0)***
Bottom of Appliance To Ceiling	64 (1626)
Vent	3 (76) Top * - 1 (25.4) Sides & Bottom
Service Clearances - Feet (meters)	
Front	3 ft. (0.9 m)

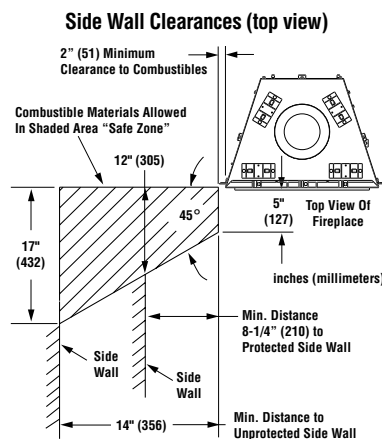

Mantel Clearances Inches (mm)



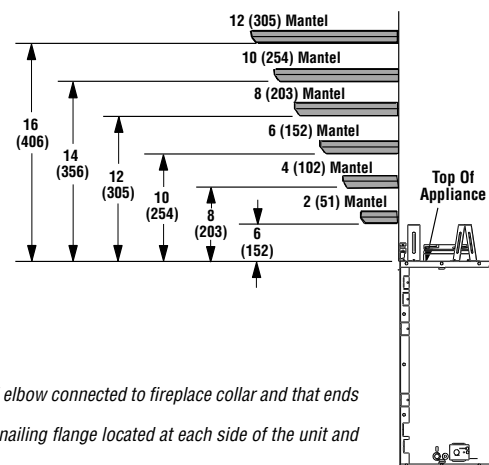


* **Note:** 3 in. (75 mm) above any horizontal vent component, except for installations which have an elbow connected to fireplace collar and that ends in a horizontal termination (this installation requires a 4" clearance above vent).

** **Note:** See Installation Instructions Manual on **Page 6 (Step 1)** for clearance requirements to the nailing flange located at each side of the unit and any screw heads adjacent to it.

*** **Note:** To ensure proper fit of the facade, the appliance base will need to be elevated 3/4" above the floor to allow for the proper fit of the facade (i.e. Use 3/4" board as platform).

Venting Requirements

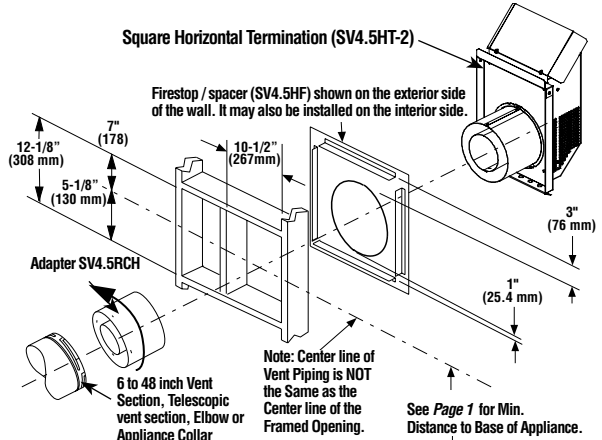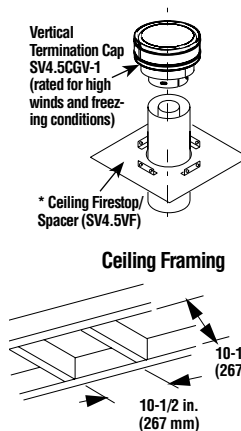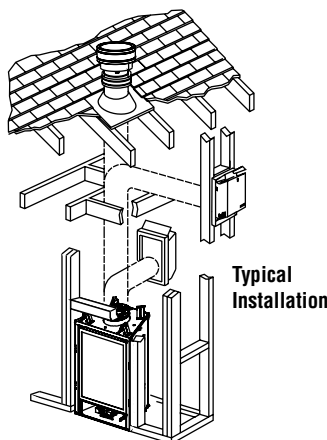

Printed in U.S.A. © 2007 Lennox Hearth Products
P/N 775,617M REV. A 06/2008

LENNOX
HEARTH PRODUCTS

Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

Page 2 of 2