



Multiple views and flexible installation configurations create brilliant, dazzling centerpieces.

LENNOX
HEARTH PRODUCTS



CPF-38 peninsula, shown with black bi-fold doors



CST-38 see-through, shown with brass bi-fold doors

MERIT™ SERIES


The Merit™ Series wood-burning fireplaces beautifully enhance the ambiance of any home from any angle. Consider a corner unit (CR-3835) for a quiet retreat, the peninsula (CPF-38) for an island installation at the end of a wall or the see-through (CST-38) for a room divider. With a sleek look and design combined with the stunning beauty of a real wood fireplace, any of these fireplaces will create a dramatic focal point and offer optimal choices for installation versatility.



CR-3835 Corner
(right or left) configuration
– left shown




CPF-38 Peninsula
(3-sided) configuration




CST-38 See-Through
(2-sided) configuration

CR-3835 (RIGHT) DIMENSIONS

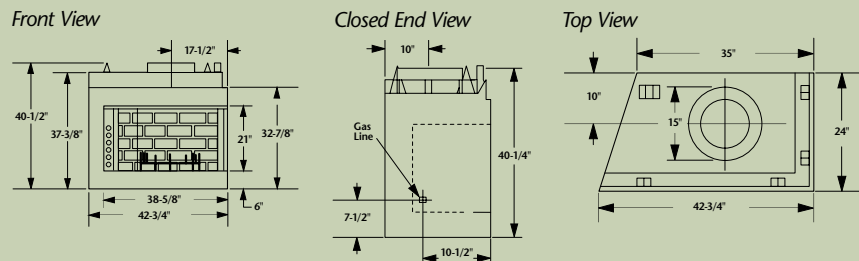

CPF-38 & CST-38 DIMENSIONS

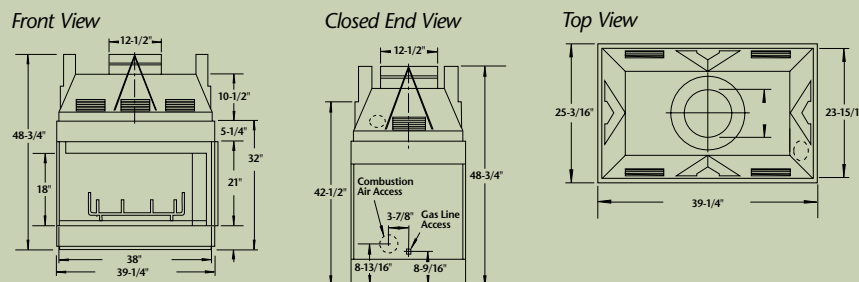

FRAMING DIMENSIONS

Model	Width	Height	Depth
CR-3835	42-5/8"	40-5/8"	24"
CPF-38	39-1/4"	49"	24-3/16"
CST-38	40-1/4"	49"	24-3/16"

On cover: CR-3835 shown with polished brass bi-fold doors.

PRODUCTS AND DEALERS YOU CAN COUNT ON

At Lennox, we understand how important it is for you to feel comfortable at home, so we're committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is every bit as important as choosing the right brand, and we think you'll agree that our dealers are a big reason why you can count on getting quality customer service when you call.

LENNOX

HEARTH PRODUCTS

© Lennox Industries Inc. 2010

Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.



Black door finish



Polished brass door finish



Brushed stainless door finish

STANDARD FEATURES

Multi-view designs for the perfect fire presentation from any angle

Realistic brick-patterned liner frames the fire with the look of a realistic masonry fireplace

Uses economical Security™ FTF8 double-wall, air-cooled chimney system

Standard fuel grate, damper and mesh firescreens

Built-in outside air control mechanism

Gas connection knockouts on both sides of firebox

Backed by the Good Housekeeping Seal

OPTIONAL ACCESSORIES

Polished brass bi-fold glass doors or twin-pane doors and fixed end panels are required (CPF-38 and CST-38)

Black or polished brass bi-fold glass doors (CR-3835)

Black or polished brass bi-fold doors or twin-pane brass doors (CPF-38)

Black, polished brass or brushed stainless bi-fold doors or twin-pane brass doors (CST-38)

Outside combustion air kit

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Actual performance may vary depending upon home design and insulation, ceiling heights, climate, condition and type of wood used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Built to UL 127/ULCS610 standards. Agency report numbers and local approvals, including WA State and NYC, vary by model. Refer to specific installation instructions or our website for details.

