

# MPD35PF

## Appliance Specifications

| Millivolt Models | Electronic Models |
|------------------|-------------------|
| MPD35PF-NM       | MPD35PF-NE        |
| MPD35PF-PM       |                   |

### Fireplace Framing Specifications


- Notes:
- Inches (millimeters)
  - Minimum Framing Stud Size is 2 x 4
  - See side views of fireplace below for gas line inlet location options.

| SPECIFICATIONS        |                              |
|-----------------------|------------------------------|
| Natural Gas BTU Input | 30,000                       |
| Propane Gas BTU Input | 28,000                       |
| Co-axial DV Vent Size | 4-1/2" Inner<br>7-1/2" Outer |

| NOTES                                                                                                                          |  |
|--------------------------------------------------------------------------------------------------------------------------------|--|
| • Annual Fuel Utilization Efficiency                                                                                           |  |
| Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice. |  |
| Appliance has a factory-installed vent seal cap in each flue outlet. (see <i>Installation Manual</i> )                         |  |




| EFFICIENCIES     |                  |
|------------------|------------------|
| <b>ENERGUIDE</b> | 61 % Natural Gas |
|                  | 62 % Propane Gas |
| • AFUE           | 65 % Natural Gas |
|                  | 67 % Propane Gas |

| PRODUCT REFERENCE INFORMATION |            |             |                             |
|-------------------------------|------------|-------------|-----------------------------|
| Cat. No.                      | Model      | Ship Weight | Ship. Volumn                |
| H6945                         | MPD35PF-NM | 220 lbs     | 46W x 26D x 43H (30 cu.ft.) |
| H6946                         | MPD35PF-PM | 220 lbs     | 46W x 26D x 43H (30 cu.ft.) |
| H6947                         | MPD35PF-NE | 220 lbs     | 46W x 26D x 43H (30 cu.ft.) |




\*\*\*This dimension does not include the addition of drywall to the inside of framing or clearance for the *Side Vent Seal Cap*. Adjust accordingly for your installation.



See also, *Side Vent Seal Cap* note below.

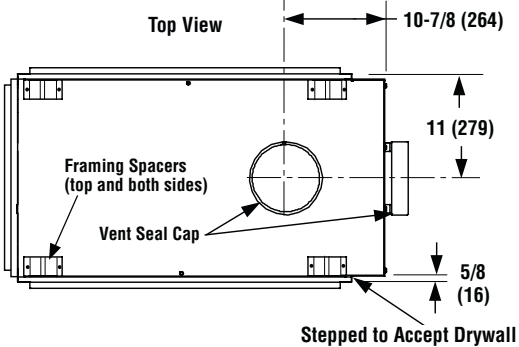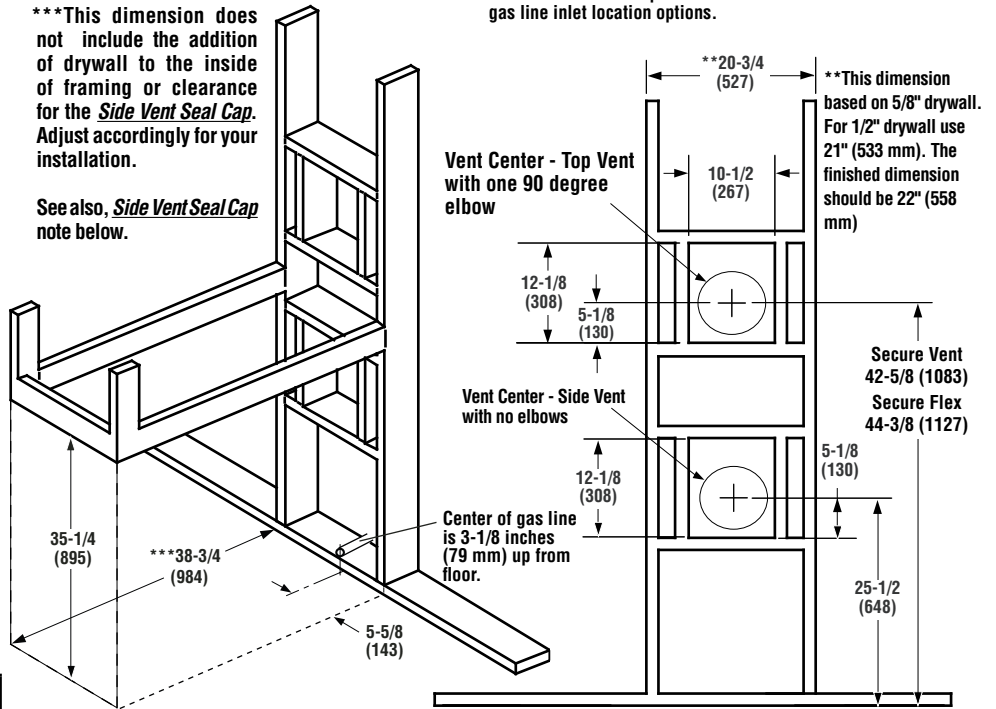

| Framing Dimensions for Roof Inches (millimeters) |                     |                     |
|--------------------------------------------------|---------------------|---------------------|
| Pitch                                            | C                   | D                   |
| 0/12                                             | 10-1/2 in. (267 mm) | 10-1/2 in. (267 mm) |
| 6/12                                             | 10-1/2 in. (267 mm) | 12 in. (305 mm)     |
| 12/12                                            | 10-1/2 in. (267 mm) | 17-3/4 in. (451 mm) |

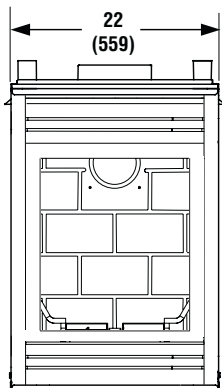


Left Side View

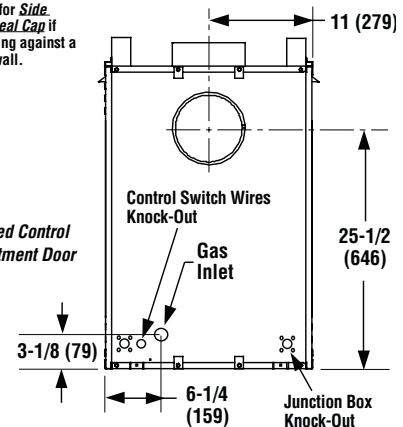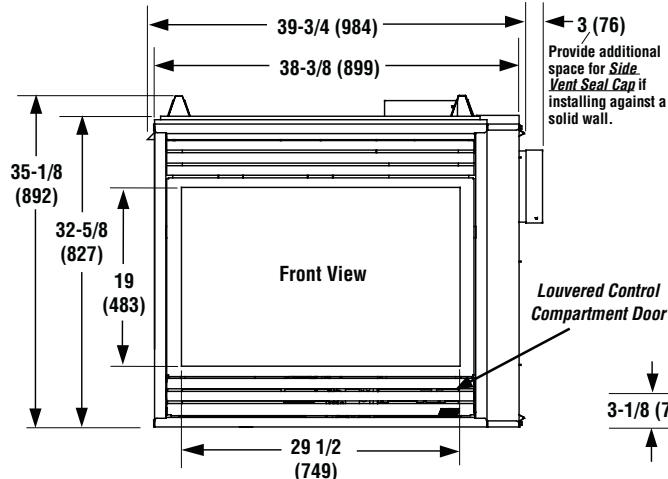

# MPD35PF

**Millivolt Models**    **Electronic Models**  
 MPD35PF-NM        MPD35PF-NE  
 MPD35PF-PM




## Appliance Clearances DIRECT VENT PENINSULA MERIT® PLUS SERIES

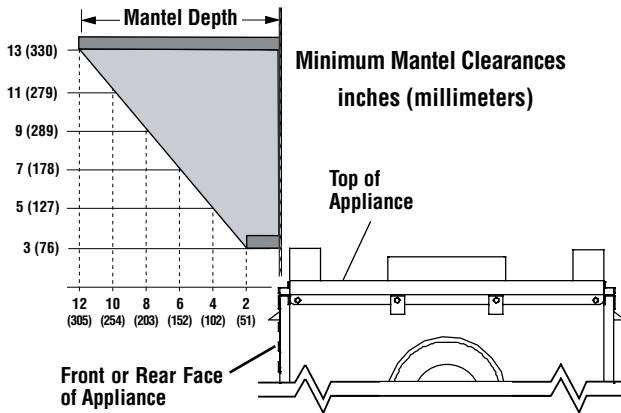


Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.

| Minimum Appliance and Vent Clearances - Inches (millimeters) |                                         |
|--------------------------------------------------------------|-----------------------------------------|
| Sides                                                        | 1/2 (13)                                |
| Top Spacers                                                  | 0 (0)                                   |
| Floor                                                        | 0 (0)                                   |
| Bottom of Appliance To Ceiling                               | 72 (1829)                               |
| Vent                                                         | 3 (76) Top *<br>1 (25.4) Sides & Bottom |
| SERVICE CLEARANCES Feet (meters)                             |                                         |
| Front & Back Faces                                           | 3 ft. (0.9 m)                           |

**\*Note:** 3 in. (75 mm) above any horizontal / inclined vent component.

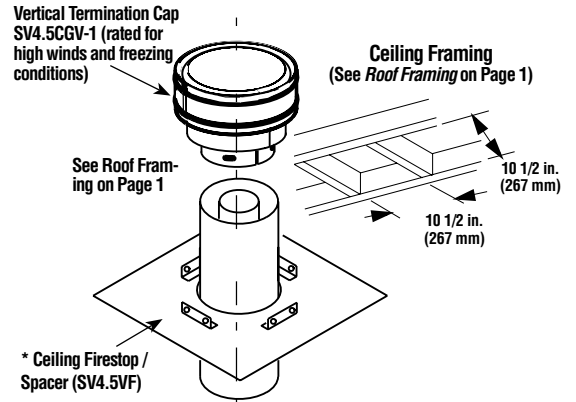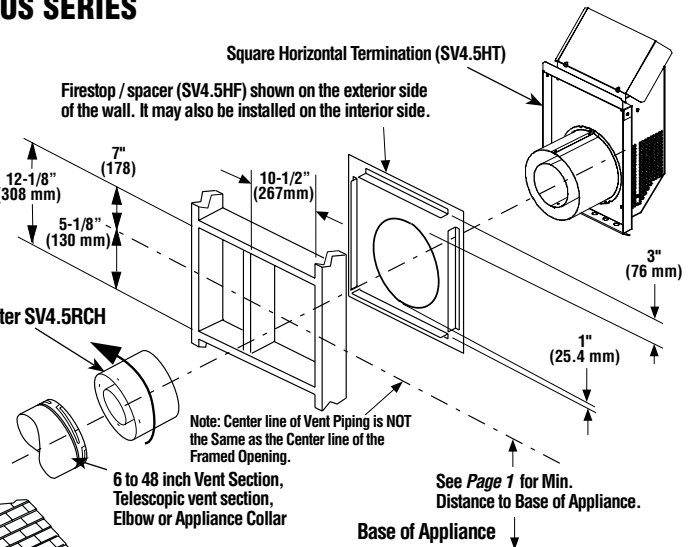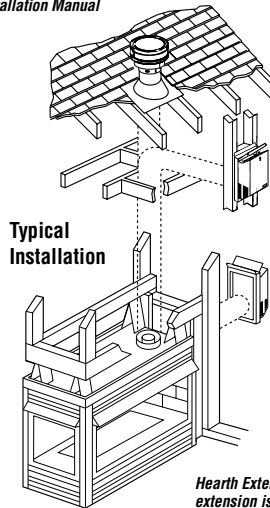

\* Ceiling Firestop / Spacer (SV4.5VF)

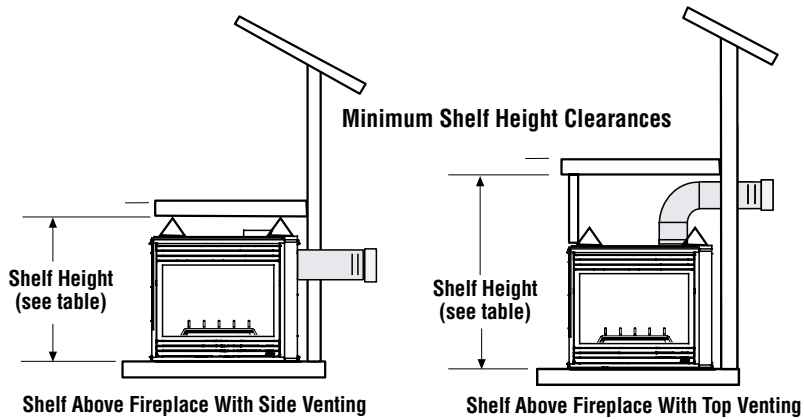

| Model No. | Shelf Height - Inches (millimeter) |                                     |               |
|-----------|------------------------------------|-------------------------------------|---------------|
|           | Side Vent - Straight Out Back      | Top Vent - with One 90 Degree Elbow |               |
|           | Secure Vent & Secure Flex          | Secure Vent                         | Secure Flex   |
| MPD35PF   | 35-1/4 (895)                       | 49-3/8 (1254)                       | 51-1/8 (1299) |

**Combustible Materials Allowed In Shaded Area "Safe Zone"**  
 Inches (millimeters)

At 5" minimum side wall clearance, the wall (shown in dark gray) can be any length.

