

MPD35ST

Appliance Specifications

Millivolt Models **Electronic Models**
 MPD35ST-NM-B MPD35ST-NE-B
 MPD35ST-PM-B

Fireplace Framing Specifications

***This dimension does not include the addition of drywall to the inside of framing or clearance for the *Side Vent Seal Cap*. Adjust accordingly for your installation. Place the fireplace first, then finish the framing around it.

See also, *Side Vent Seal Cap* note below.






- Notes:
- Inches (millimeters)
 - Minimum Framing Stud Size is 2 x 4
 - See side views of fireplace below for gas line inlet location options.

SPECIFICATIONS	
Natural Gas BTU Input	30,000
Propane Gas BTU Input	28,000
Co-axial DV Vent Size	4-1/2" Inner 7-1/2" Outer



NOTES	
• Annual Fuel Utilization Efficiency	
Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.	
Appliance has a factory-installed vent seal cap in each flue outlet. (see <i>Installation Manual</i>)	

EFFICIENCIES	
ENERGUIDE	61 % Natural Gas
	62 % Propane Gas
• AFUE	65 % Natural Gas
	67 % Propane Gas

PRODUCT REFERENCE INFORMATION			
Cat. No.	Model	Ship Weight	Ship. Volume
H3201	MPD35ST-NM	220 lbs	46W x 26D x 43H (30 cu.ft.)
H3202	MPD35ST-PM	220 lbs	46W x 26D x 43H (30 cu.ft.)
H3203	MPD35ST-NE	220 lbs	46W x 26D x 43H (30 cu.ft.)

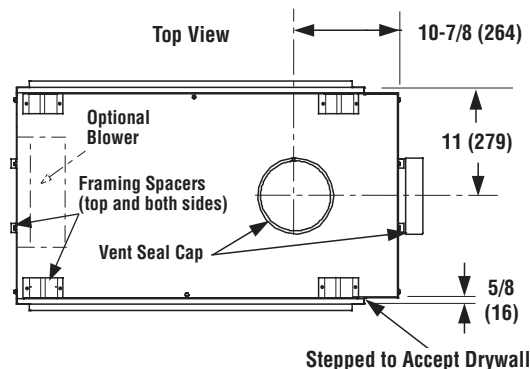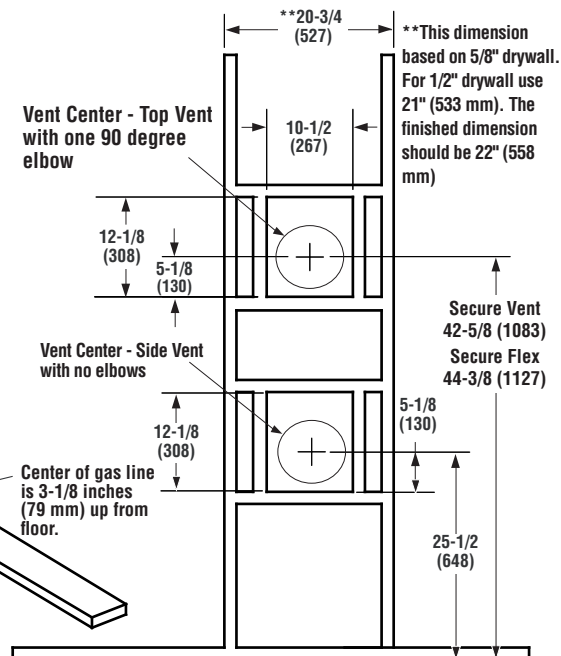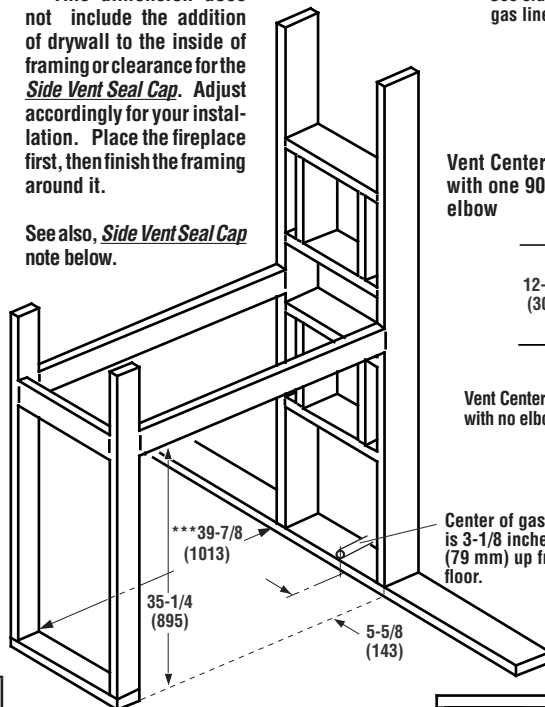

Framing Dimensions for Roof Inches (millimeters)		
Pitch	C	D
0/12	10-1/2 in. (267 mm)	10-1/2 in. (267 mm)
6/12	10-1/2 in. (267 mm)	12 in. (305 mm)
12/12	10-1/2 in. (267 mm)	17-3/4 in. (451 mm)

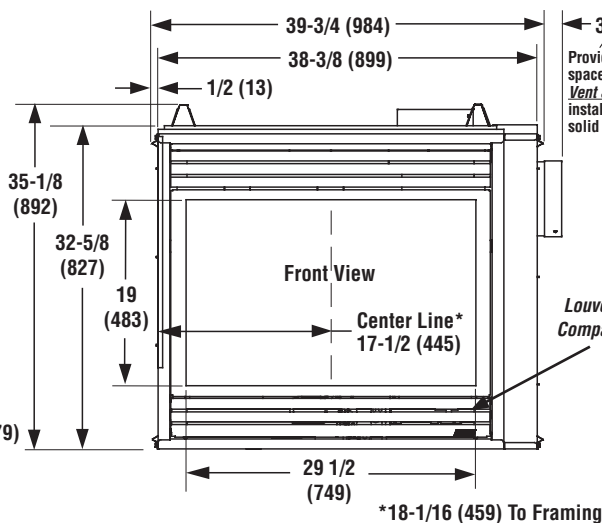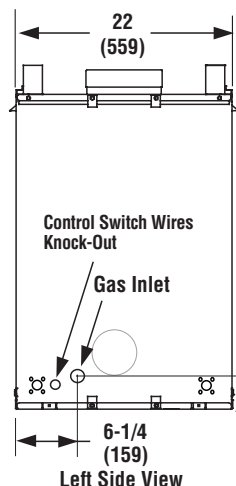


Stepped to Accept Drywall
 Provide additional space for *Side Vent Seal Cap* if installing against a solid wall.

Louvered Control Compartment Door

3 (76)

3-1/8 (79)

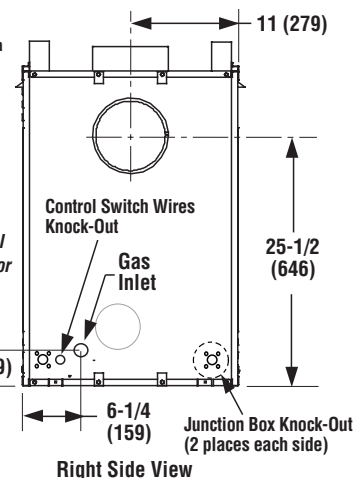

Right Side View

MPD35ST

Appliance Clearances


DIRECT VENT SEE-THROUGH MERIT® PLUS SERIES

Millivolt Models

MPD35ST-NM-B
MPD35ST-PM-B

Electronic Models

MPD35ST-NE-B

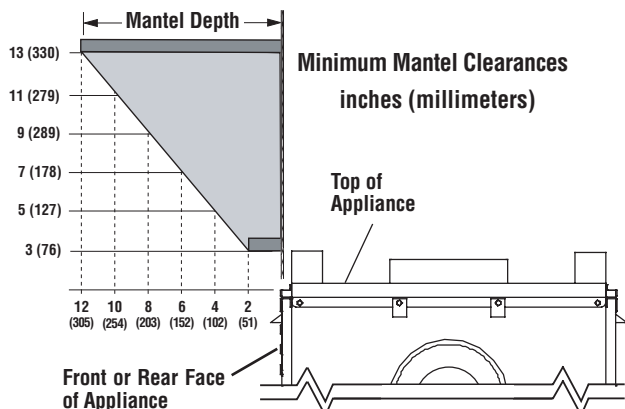


Specifications and clearances are subject to change without notice. Refer to Installation Manual before installation of these appliances for updated dimensions and instructions.


Minimum Appliance and Vent Clearances - Inches (millimeters)	
Sides	1/2 (13)
Top Spacers	0 (0)
Floor	0 (0)
Bottom of Appliance To Ceiling	72 (1829)
Vent	3 (76) Top * 1 (25.4) Sides & Bottom
SERVICE CLEARANCES Feet (meters)	
Front & Back Faces	3 ft. (0.9 m)

***Note:** 3 in. (75 mm) above any horizontal / inclined vent component.

Note: Diagrams, illustrations and photographs are not to scale - Consult Installation Instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



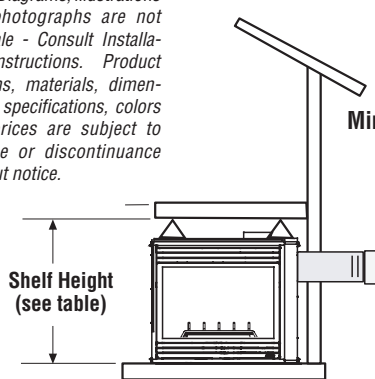


Shelf Above Fireplace With Side Venting

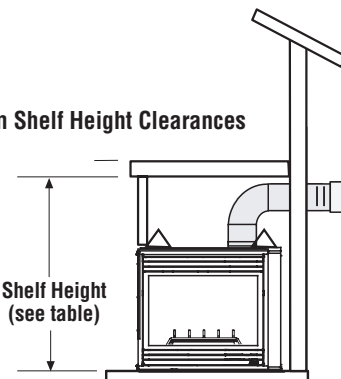

Shelf Above Fireplace With Top Venting


Model No.	Shelf Height - Inches (millimeter)		
	Side Vent - Straight Out Back	Top Vent - with One 90 Degree Elbow	
	Secure Vent & Secure Flex	Secure Vent	Secure Flex
MPD35ST	35-1/4 (895)	49-3/8 (1254)	51-1/8 (1299)

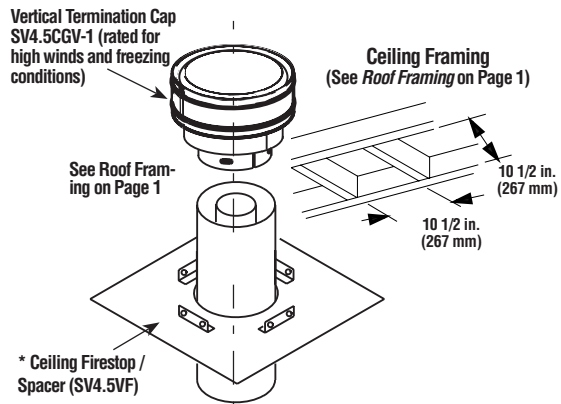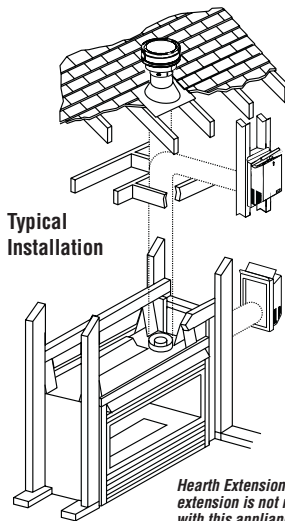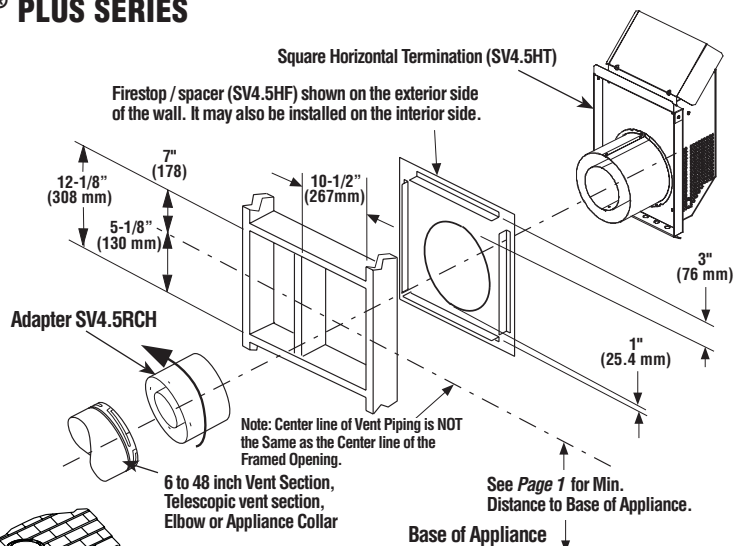

Combustible Materials Allowed In Shaded Area "Safe Zone"

Inches (millimeters)

At 5" minimum side wall clearance, the wall (shown in dark gray) can be any length.

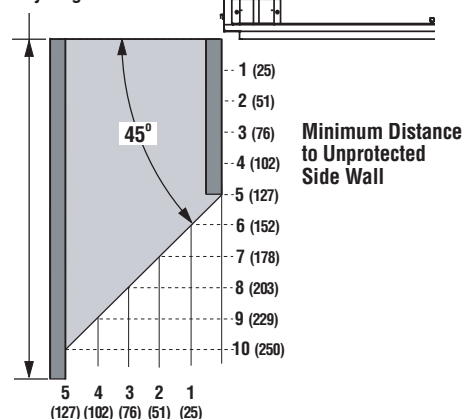

Minimum Side Clearances