


Ravelle™ 42 (RAVL42)

Appliance Specifications


DIRECT VENT FIREPLACE HEATER

DAVE LENNOX
signature
COLLECTION


Framing Dimensions

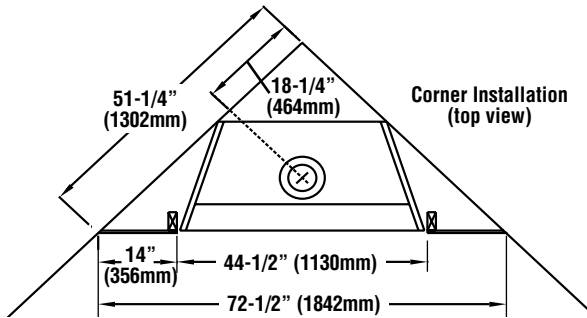

- ① Horizontal installations with 90° elbow right off top, then directly through an exterior wall, require a hole 10-3/4" (273mm) square with a center line 42-1/4" (1073mm) above fireplace base to accommodate wall thimble and direct vent pipe.
- ② Route gas line to the left side of unit. Gas line access hole is located 6-7/8" (175mm) back from front edge and 2-1/8" (54mm) up from base of the unit. If a wall-mounted on/off switch or thermostat is to be used, route wires through the gas line hole.
- ③ Route the electrical power supply wiring to right rear of the unit. The electrical access is located at right lower rear of the fireplace.

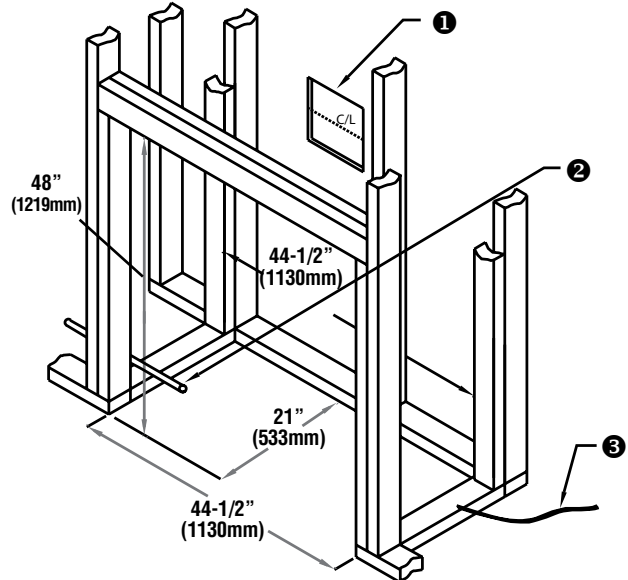

Fireplace Dimensions

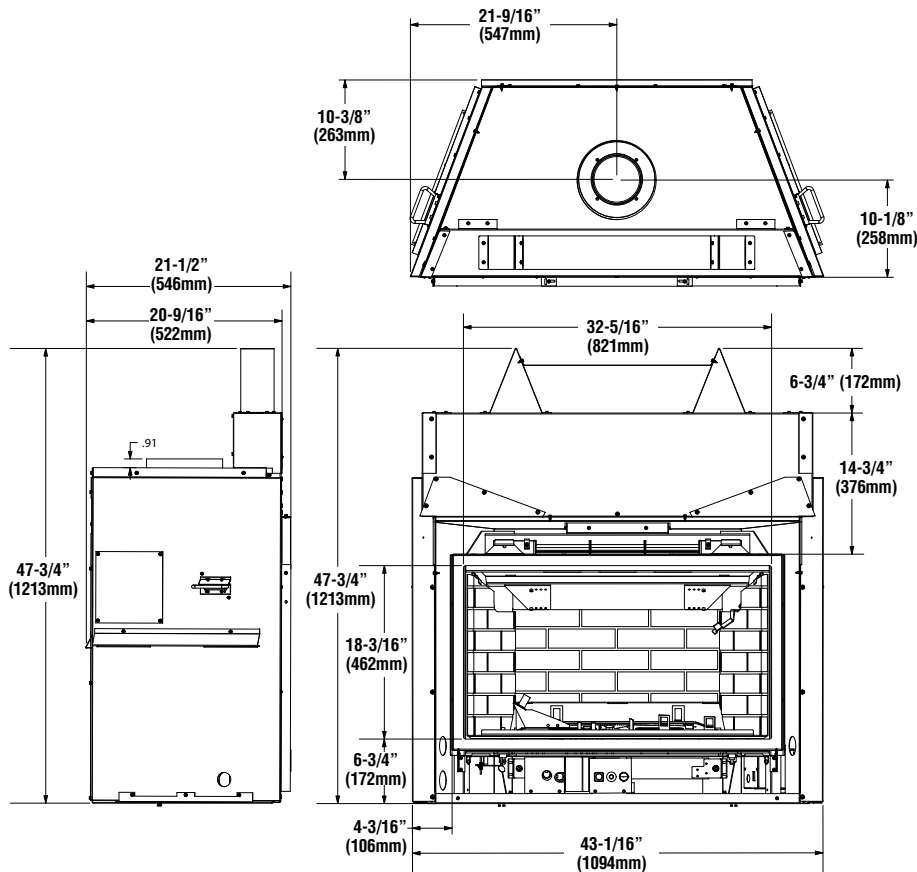

Canadian EnerGuide Rating -
NG - 50.43%, LP - 53.47%
Steady-State Efficiency** - 83% - 86%


** Efficiency varies slightly with various pipe configurations.

Tested and certified by OMNI -Test Laboratories to ANSI Z21.88 / CSA 2.33 Standard for Vented Gas Fireplace Heater and CGA 2.17-M91 and UL 307B Gas Burning Heating Appliances for Manufactured (Mobile) Homes in both USA and Canada.

New York City, New York (MEA#: 138-07-E). Commonwealth of Massachusetts (G3-1104-102)

Listing Information

Tested & Listed By **OMNI-TEST** Laboratories, Inc.
Portland, Oregon USA
Report No. 050-S-08c-5



Input (BTU) - Millivolt Models	
Fuel	Input Rate (BTU / HR)
Natural Gas	42,000 / 29,500
Propane	36,000 / 25,000

LENNOX
HEARTH PRODUCTS

Ravelle™ 42 (RAVL42)

Product Reference Information			
Cat. #	Model	Ship. Wt.	Ship. Volume
H5429C	RAV42DVF-C	315 lb.	43 cu. ft.

Decorative Faces (one required)

Arch Inset
Classic Inset
Screen Face
Foundry™

Brick Liners (one required)

Tan Brick
Red Brick
Architectural Stone

Ductability (optional)


Forced Air Duct Kit
Whole Home Comfort System

Misc.

Wall thermostat
Remote thermostat
Barrier Screen

Options


Clearances

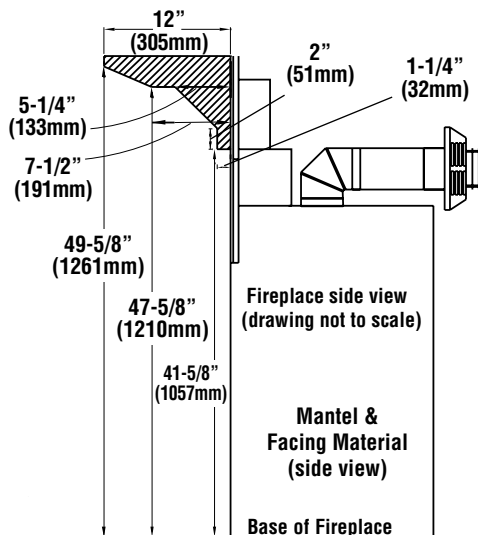


Minimum Clearances To Combustible Materials	
Front corners to enclosure (from stand-offs)	0 (0mm)
Rear corners to enclosure (from stand-offs)	0 (0mm)
Top to header (from stand-offs)	0 (0mm)
Bottom of unit to floor	0 (0mm)
Edge of door glass to side wall and side trim	7-1/2 (191mm)
Back to enclosure (from stand-offs)	0 (0mm)

Note: Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Horizontal Termination

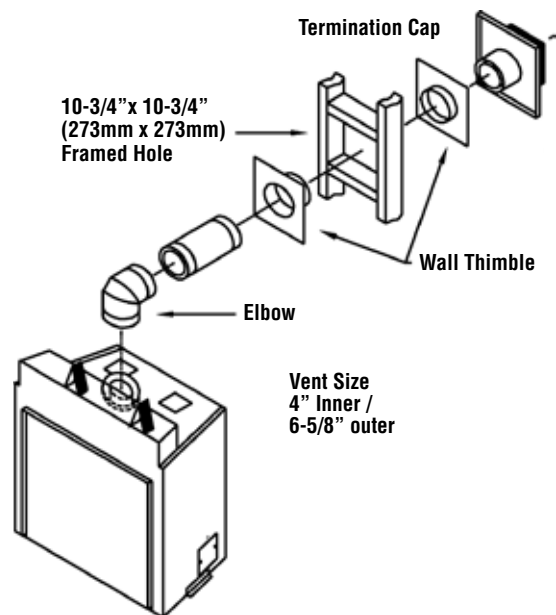

Vertical Termination

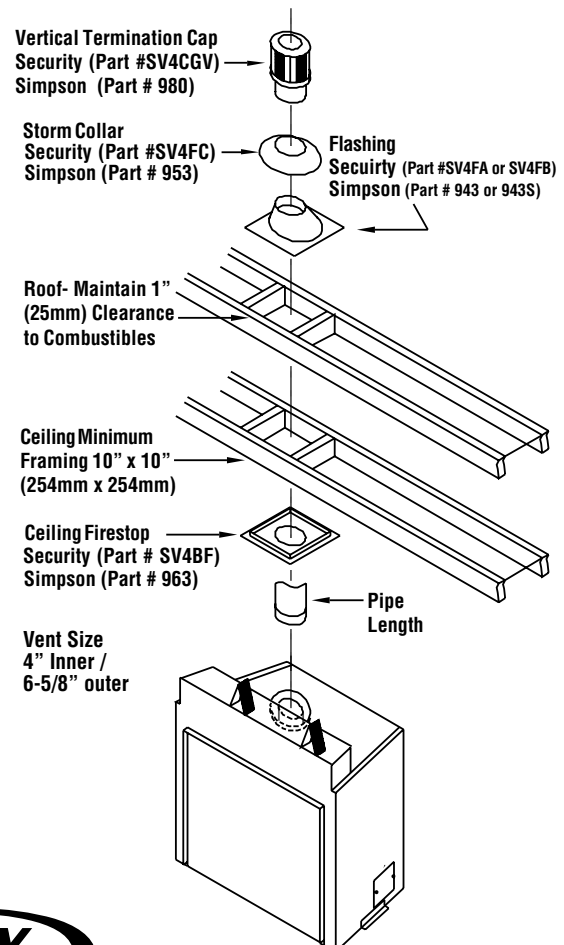

Typical Installations

LENNOX
HEARTH PRODUCTS