

Model has met the EPA Wood-burning
Fireplace Program Phase 2 emission level

DAVE LENNOX
signature
COLLECTION™






Fireplace		
Cat. #	Model	Description
H7703	SOLANA-BK	Solana (w/Black Doors)
H7704	SOLANA-BN	Solana (w/Brushed Nickel Doors)

Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (except the wood framing)

PRODUCT REFERENCE INFORMATION	
Weight	343 lbs
Height	42"
Width	43"
Depth	26-5/8"
Chimney Weight ASHT+, Ø 8"	8.75 lb/ft.
Chimney Weight S-2100+, Ø 8"	13.2 lb/ft.
Chimney Weight AC, Ø 8"	3.75 lb/ft.




FRAMING DIMENSIONS		
A	43-1/4"	1099 mm
B	43-1/4"	1099 mm
C	33"	838 mm
D	16-1/2"	419 mm
E	85"	2159 mm
F	42-1/2"	1080 mm
G	27"	686 mm
H	26"	660 mm
J	60-1/8"	1527 mm
K	8"	203 mm
L	1"	25 mm

Framing Dimensions

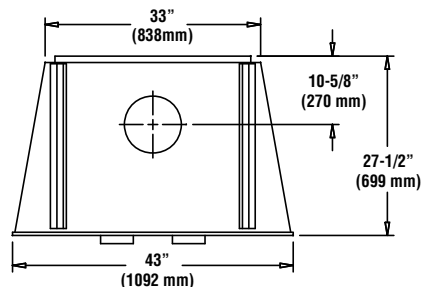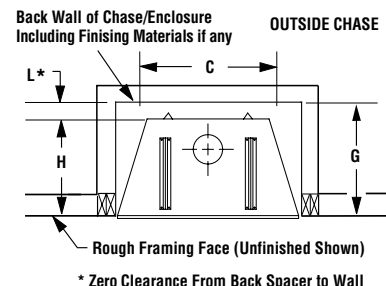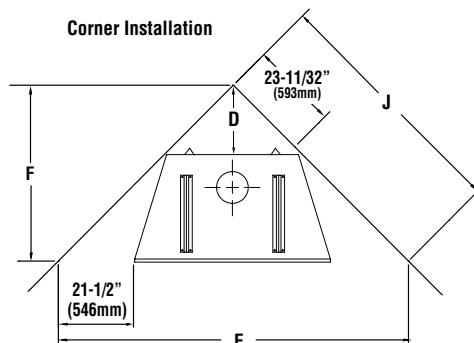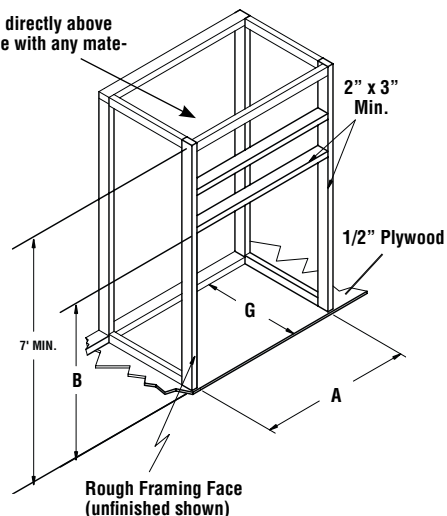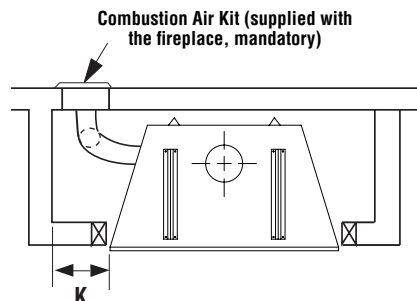

Notes
Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.
The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.

Fireplace Dimensions

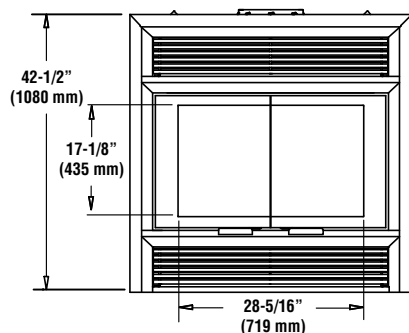

Listing Information



Listed to standards:
ULC-S610 & UL-127
ASTM 2558
Report # 192-5237



LENNOX
HEARTH PRODUCTS

Model has met the EPA Wood-burning
Fireplace Program Phase 2 emission level

DAVE LENNOX
signature
COLLECTION

Typical Installations

AC CHIMNEY INSTALLATION (AIR COOLED INSULATED GALVALUME CHIMNEY)

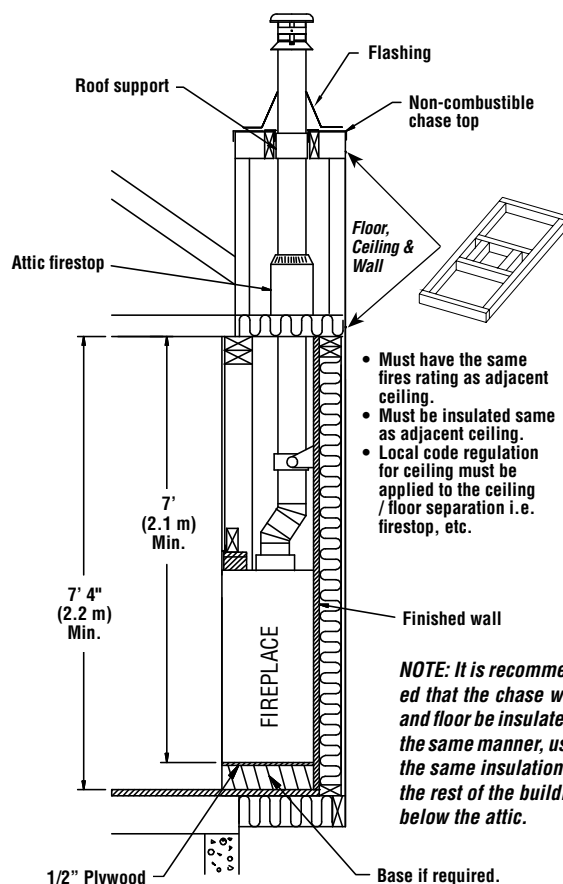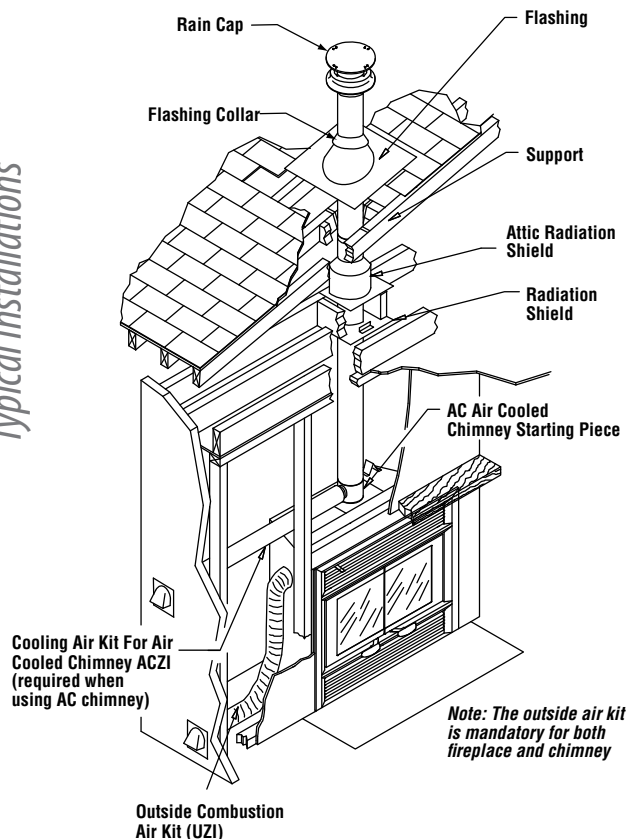

NOTE: It is recommended that the chase walls and floor be insulated in the same manner, using the same insulation, as the rest of the building, below the attic.

Combustible Clearances

CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation;

Side wall: 18" (457 mm)

Ceiling: 7 feet (2135 mm) measured from the base of the fireplace

Fireplace enclosure:

Bottom: 0"

Side: 0" to spacer

Back: 0" to spacer

Top: Do not fill the space above the fireplace with any material, 7 feet measured from the base of the fireplace (Except the wood framing. See **Page 9, Figure 8**).

Chimney: 2" (50 mm)

Mantel: 48" (1219 mm) measured from the base of the fireplace.

Hearth Extension and Mantel

