



An unrivaled fire presentation and customizable features complete a striking stove designed for comfort and style.

LENNOX
HEARTH PRODUCTS

ELITE™ SERIES



Vision™ shown with brushed nickel trim.

■ The Vision™ gas stove is the perfect combination of classic handcrafted quality and sleek, modern styling. In addition to providing the warmth and efficiency expected of a gas stove, the Vision also boasts a head-turning contemporary design that will instantly become the focal point of any room. The unique three-sided design allows the Vision to be viewed from almost any angle, increasing installation options and providing a full, open view of the dramatic flames. Customizable options like louver, ash lip and window accent finishes provide the ultimate in décor integration. ■

CUSTOMIZE TO YOUR TASTE

With the Vision™ direct-vent gas stove you have plenty of options to create the perfect look. Start with a choice of heating capacities, louver finishes, ash lip and window accents, then choose from a list of optional accessories. Before you know it, you'll be relaxing in front of your dream stove.

STEP 1: BTUs

Choose from two heating capacities. To determine which option best suits your needs, match the square footage of your living area with the options listed below.



25,000 BTUs
800-1,250 sq. ft.*

35,000 BTUs
1,175-1,750 sq. ft.*

STEP 2: TRIM FINISH

Choose the finish that best complements your room décor and/or color scheme.



Black



Brushed nickel



Gold

Note: Brushed nickel finish trim kit includes a brushed nickel finish handle and the gold finish trim kit includes a gold finish handle. A brushed nickel finish handle or a gold finish handle can also be ordered with the black trim kit.

STANDARD FEATURES

3-sided glass provides 369 sq. in. of total viewing area – an open view from almost any angle for unsurpassed fire viewing

Available with 25,000 or 35,000 BTUs for personalized heating options

Multi-sided design provides flexible installation options

Beautiful dancing flames fill the entire viewing area and combine with a wide-open glowing ember bed for a remarkable fire presentation

No hearth pad required when installed on a non-combustible floor or carpet with less than 1-1/2" pile

Heavy-duty, 14-gauge steel construction ensures stability and durability

150-CFM variable-speed blower provides optimal and steady heat circulation



Control Panel—easy-access controls are conveniently located on the front of the stove, but are completely concealed.



Burn Technology—provides glowing ember bed and dancing flames for the look of a real fire.




Thermostat—compatible with remote or wall thermostat for added convenience.


*Square-foot heating capacities are approximations only. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used.

MINIMUM CLEARANCE TO COMBUSTIBLES

Straight Wall Installation

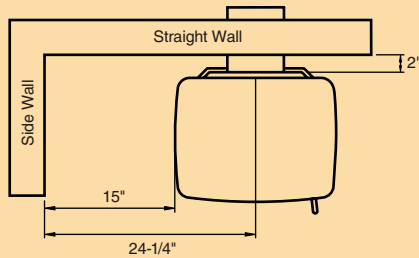

Corner Installation

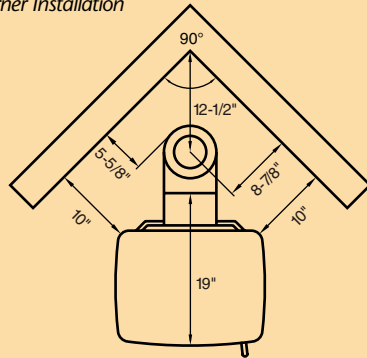

No hearth pad is required if installed on non-combustible floor, wood, high-pressure-laminate wood flooring, or carpet with pile less than 1-1/2".

SPECIFICATIONS

	VISION 25	VISION 35
HEAT CAPACITY*	800–1,250 sq. ft.	1,175–1,750 sq. ft.
BTU INPUT (HIGH)	25,000 Natural Gas	35,000 Natural Gas
BTU INPUT (LOW)	17,500 Natural Gas	23,000 Natural Gas
BTU INPUT (HIGH)	25,000 Propane	35,000 Propane
BTU INPUT (LOW)	18,000 Propane	23,500 Propane
BLOWER (INCLUDED)	155-CFM Variable-Speed	155-CFM Variable-Speed
CANADIAN ENERGY GUIDE	NG 65.08%	61.65%
RATING	LP 66.56%	65.74%
STEADY-STATE EFFICIENCY**	82%-85%	82%-85%
	Natural Gas & Propane	Natural Gas & Propane
DIRECT-VENT PIPE	6-5/8" Security Chimneys™ Secure Vent™	6-5/8" Security Chimneys™ Secure Vent™


NOTE: The Vision™ 25/35 gas stove is shipped as a 35,000 BTU unit and includes a kit that enables field conversion to 25,000 BTU. There is only one stove model number.

*Square-feet heating capacities are approximations only. Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

**Efficiency varies slightly with various pipe configurations.

UNIT DIMENSIONS

A	WIDTH	18-1/2"
B	HEIGHT	32-1/2"
	DEPTH	14-7/8"
	APPROXIMATE WEIGHT	199 lbs.

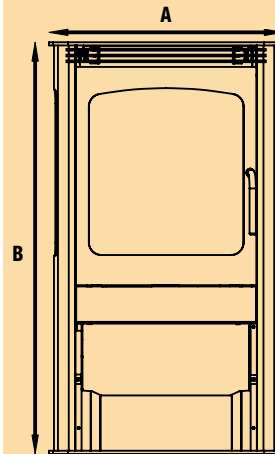

PRODUCTS AND DEALERS YOU CAN COUNT ON

At Lennox, we understand how important it is for you to feel comfortable at home, so we're committed to providing you with the finest hearth products available. Choosing the right dealer for your hearth needs is every bit as important as choosing the right brand, and we think you'll agree that our dealers are a big reason why you can count on getting quality customer service when you call.

LENNOX

HEARTH PRODUCTS

© Lennox Industries Inc. 2010


Visit us at www.lennox.com, or contact us at 1-800-9-LENNOX.

IMPORTANT NOTES:

As with any heating appliance, fireplace or stove, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Diagrams, illustrations and photographs are not to scale - consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

Approved to U.S. and Canadian safety and performance standards – ANSI Z21.88/CSA 2.33-M98 vented gas fireplace heaters.



Tested &
Listed By



Portland
Oregon USA



100% recycled