





# Madison Park™ MPI27 / MPI27CD

## Appliance Specifications

## DIRECT-VENT FIREPLACE INSERT

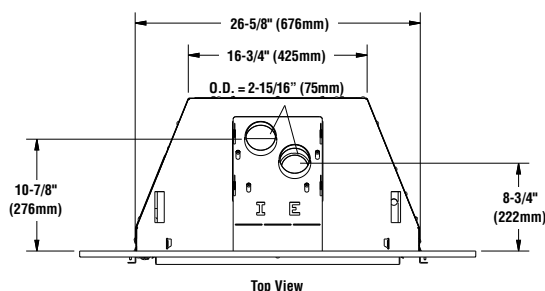

| Input (BTU) - Electronic Models |                       |           |
|---------------------------------|-----------------------|-----------|
| Fuel                            | MPI27                 | MPI27CD   |
|                                 | Input Rate (BTU / HR) |           |
| Nat. Gas                        | Hi 30,000             | Hi 30,000 |
|                                 | Lo 21,000             | Lo 21,000 |
| LP Gas                          | Hi 25,000             | Hi 25,000 |
|                                 | Lo 20,000             | Lo 20,000 |

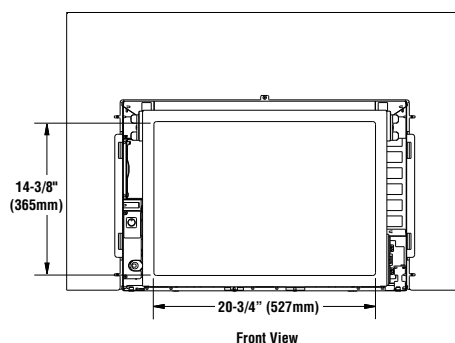

Left Side View

Front View

Right Side View


| MINIMUM FIREPLACE SIZES REQUIRED | MPI27/MPI27CD |
|----------------------------------|---------------|
| Front Opening.....               | 27" (686mm)   |
| Height.....                      | 18" (457mm)   |
| Rear Width.....                  | 17" (432mm)   |
| Depth.....                       | 15" (381mm)   |

| MINIMUM CLEARANCES TO COMBUSTIBLES                  |                |
|-----------------------------------------------------|----------------|
| A = 1-1/2" (38mm) Top Facing to Bottom of Appliance | 32" (813mm)    |
| B = Side Wall                                       | 9-1/2" (241mm) |
| *C = 6" (152mm) Mantel to Bottom of Appliance       | 34" (864mm)    |



| HEARTH PROTECTION                                 |                 |
|---------------------------------------------------|-----------------|
| D = Vertical Distance from base of appliance..... | 0"   4"         |
| to Hearth Extension.....                          | (0mm)   (102mm) |
| E = Minimum Horizontal Distance.....              | 10"   0"        |
| from Front of Appliance.....                      | (254mm)   (0mm) |

\*See owner's manual for additional mantel clearances and options.

## MINIMUM CLEARANCES



Note: Hearth protection to be min. 1/2" (13mm) thick non-combustible or equivalent, with a k factor of .84.



| Efficiency   |                              |                              |
|--------------|------------------------------|------------------------------|
|              | Natural Gas                  | Propane Gas                  |
| AFUE         | MPI27 - 67%<br>MPI27CD - 67% | MPI27 - 70%<br>MPI27CD - 69% |
| EnerGuide P4 | MPI27 - 68%<br>MPI27CD - 66% | MPI27 - 71%<br>MPI27CD - 68% |

This appliance has been tested and certified to ANSI Z21.88/CSA 2.33 Standard for Vented Gas Fireplace Heater and CAN/CGA 2.17-M91 and UL 307B Gas Burning Heating Appliances for Manufactured (Mobile) Homes in both USA and Canada.

NOTE: Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.

# Madison Park™ MPI27 / MPI27CD

| Product Reference Information |                                                |              |               |
|-------------------------------|------------------------------------------------|--------------|---------------|
| Cat. No.                      | Description                                    | Ship. Weight | Ship. Volume  |
| H9122                         | MPI27, Madison Park™ 27, Small Insert          | 87.5 lb.     | 12.22 cu. ft. |
| H9123                         | MPI27CD, Madison Park Contemp 27, Small Insert | 80lb.        | 12.22 cu. ft. |

Vent Kits

## Simpson Dura Vent -

Flex Liner 3" X 35' - #3DFA-35

Adaptor w/ Flashing - #46DVA-GK

Termination Cap - #46DVA-VCH With #460 DVA-VWG

Termination Cap - #460DVA-VC

Co-Linear Kit w/ 3" X 35' Flex Liner (Intake and Exhaust), Adaptor, Flashing and Termination Cap - #46DVA-CL33

## Firebox Liner Kits - One Required

Champagne  
Merlot  
Black Porcelain  
Black Painted

## Facade Kits - One Required

Contemporary  
Santa Fe  
Artisan

## Surround Kits - One Required

3 Sided (37" W x 26" H, 44" W x 26" H, 37" W x 30" H,  
41" W x 30" H)  
4 Sided - Trimmable (46" W x 38" H)

## Glass Media Kits (MPI27CD only)

Blue Glass Media  
Black Glass Media  
Smoke Glass Media  
Amber Gold Glass Media  
White Glass Media

Options

Typical Installation

The existing fireplace chimneys may take various contours which the flexible liners will accommodate. However, keep the flexible liner STRAIGHT and avoid bending. When at maximum vertical height, standing pilot should be used for correct operation.

### Liner Requirements:


Use 3" (76 mm) diameter listed gas vent liner (UL1777 ONLY) for the EXHAUST

Use 3" (76 mm) diameter listed liner (UL 181 or UL1777) for the AIR INTAKE.

Vertical Height Min. = 10 ft. (3.1 M)  
Vertical height Max. = 25 ft. (7.6 M)

NOTE: Measured from base on unit to the end of the vent pipe or liner

The flexible vent pipe must NOT be allowed to sag behind insert or in fireplace flue.

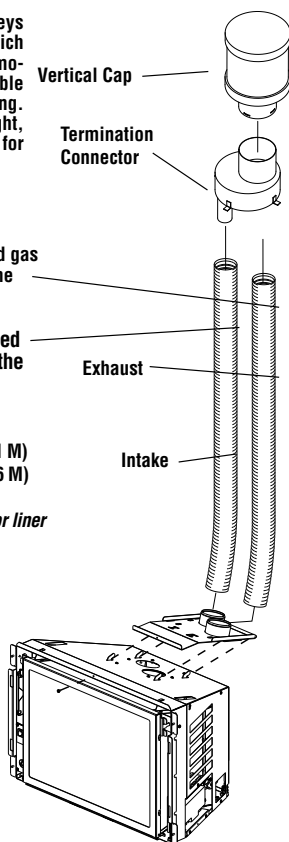

Standard Features

- Standard full-featured remote.
- Electronic ignition with optional continuous pilot mode.
- Battery back-up in case of power outage
- Standard 150-CFM variable-speed blower delivers warm, consistent heat