

PRODUCT SPECIFICATIONS

300DVBSC7 Direct Vent System



GLASS VIEWING AREA





27"W x 18"H (486 sq. in.)
(686 mm x 457 mm, 3135 cm²)

STANDARD FEATURES

Unitized black louver assembly
Ember bed burner
Ceramic Fiber logs
Grate
Junction box
Deluxe control panel

FIELD INSTALLED ACCESSORIES

Firebrick: Tavern Brown, Cottage Red
Curved Trim: Black, Stainless Steel
Medium Trim Kit: Black, Stainless Steel
Manual Blower and Cord (160cfm): FK-12
Thermostat Blower (160cfm): BLOT
Signature Command Blower (160cfm): BLOTSC (requires purchase of SCSACM & TSFSC)
Signature Command Remotes & Thermostats: RMSC, TSMSC, TSTSC, TSFSC, WT)
Signature Command Accessories: A/C Accessory, Module and Command Center, Wall Mount Kits
Mesh Screen Glass Cover
Wood Cabinet Surrounds
Designer Facings

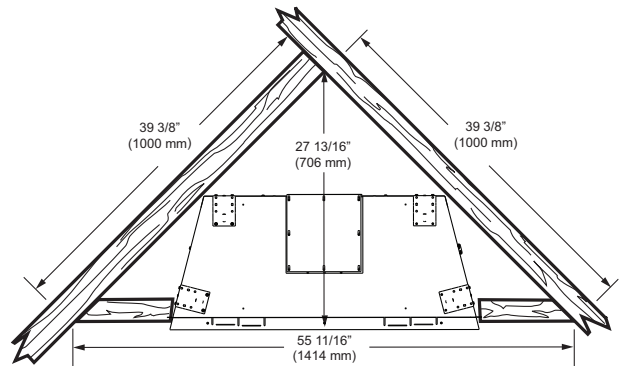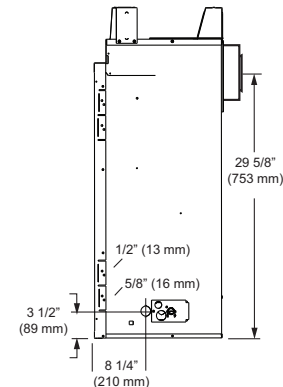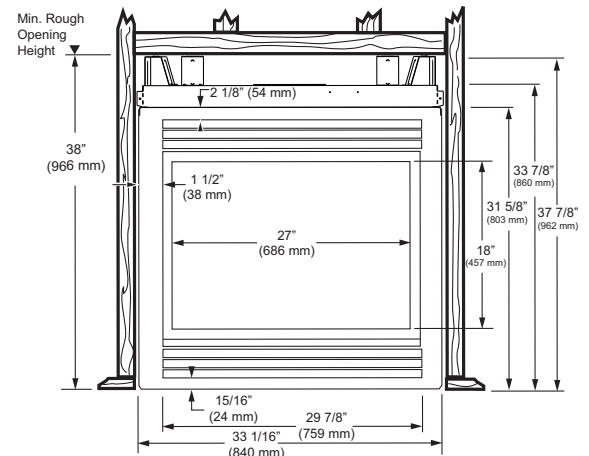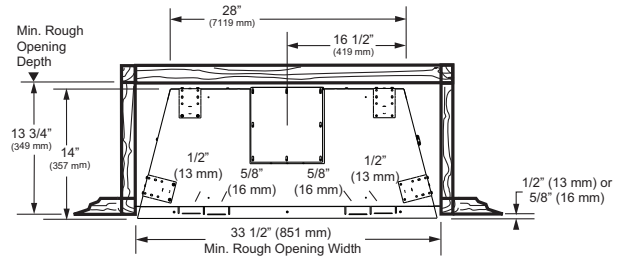

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com



PRODUCT SPECIFICATIONS

300DVBSC7 Direct Vent System

TECHNICAL SPECIFICATIONS

BTU Input: 21,000 Max, 15,000 Min. (Nat)
 Ignition System: Signature Command System (AC w/ battery back up)
 Gas Type: Natural Gas or Liquid Propane
 Flue Type: 4 x 7 Twist Lock, Flex Vent*
 Termination: Top/Rear Convertible
 Design Certified: CSA

CLEARANCE TO FLUE

Horizontal: 3" (26 mm) Top, 1" (25 mm) Bottom and sides**
 Vertical: 1" (25 mm) on all sides

CLEARANCE TO COMBUSTIBLES

Fireplace: 0" Clearance to stand offs all sides
 Floor of unit to Ceiling: 71" (1.8 m) to combustibles
 Firebox Opening to Wall: 4" (102 mm) to combustibles
 Hearth Requirement: 0" clearance

EFFICIENCY DATA



Thermal Efficiency: Up to 80% Nat / 80% LP
 AFUE Efficiency: 63.1% Nat / 63.2% LP
 P4 Canada Efficiency: 61.8% Nat / 55.7% LP

*Simpson Dura-Vent, Selkirk Metalbestos and Metalfab are also approved for vent applications (requires adapter).

**When vertical rise is 7-1/2 feet (2.29 m) or higher from base of unit, the horizontal vent clearance to combustibles is 1" (25 mm) all sides.

MANTEL CLEARANCES

NOTE: The combustible area above the facing must not protrude more than 1/2" (19 mm) from the facing. If it does, it is considered a mantel and must meet the mantel requirements listed here.

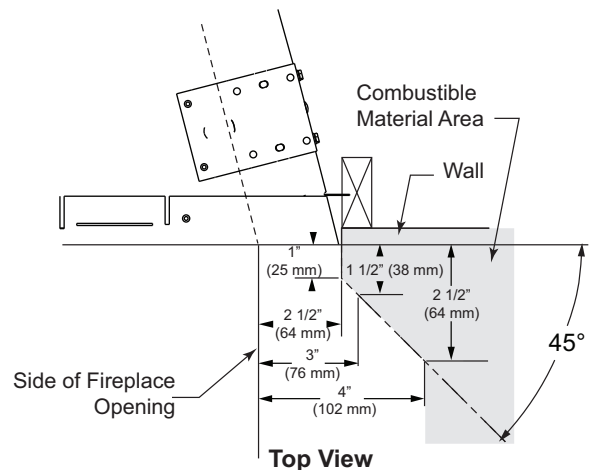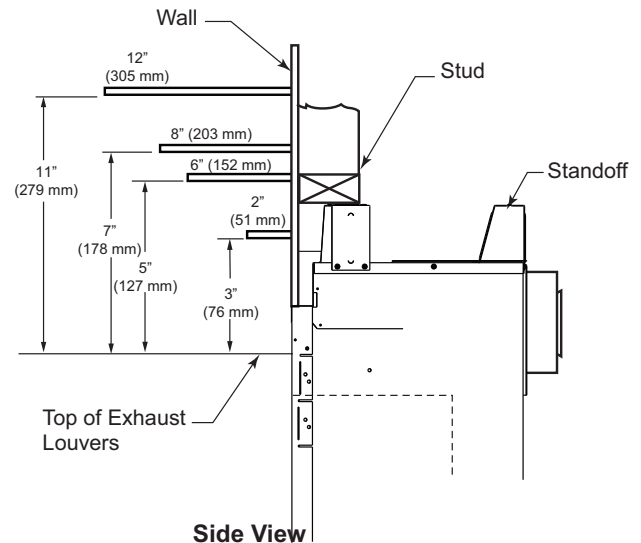

MAJESTIC



A Brand of Monessen Hearth Systems Co.
 149 Cleveland Drive, Paris, Kentucky 40361
www.majesticproducts.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Consult local building or fire officials about restrictions and installation requirements. All photographs and drawings on this brochure are for illustrative purposes only.

Obadiah's • 406-300-1776