
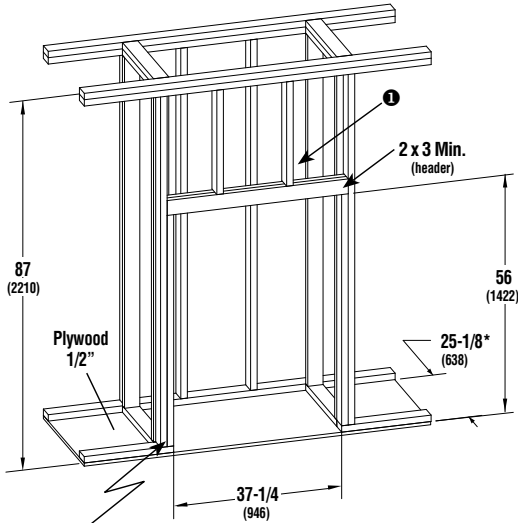
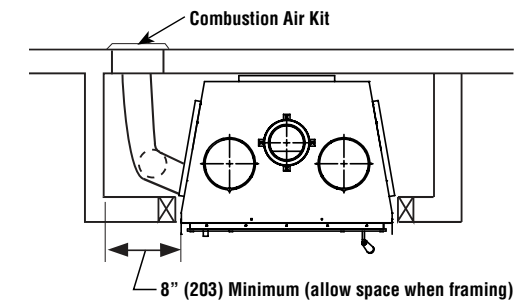
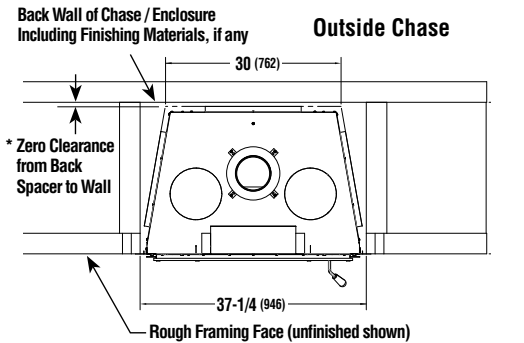


WCT6920WS

EPA Wood Burning Fireplaces Specifications

PRODUCT REFERENCE INFORMATION	
Model: WCT6920WS, Cat. No. F4482	
Weight	330 lbs
Height	38"
Width	37-1/4"
Depth	25-1/8"
Firebox W x H x D measured in front	22" x 11-3/4" x 12"

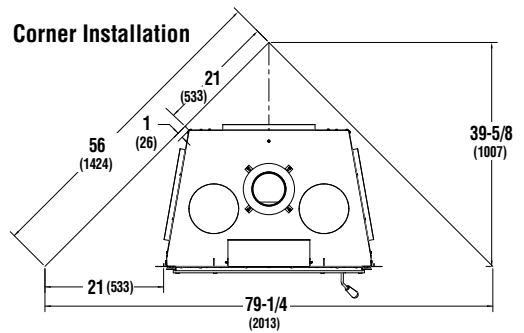

Rough Framing Face
(dimension includes finish material inside framing, if any)

* For flush framing installations


❶ Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)



Report No. 14-199 R1

Listed to ULC-S610 & UL-127

EPA certification test emission value
1.9 g/hr per 2020 NSPS (cordwood)

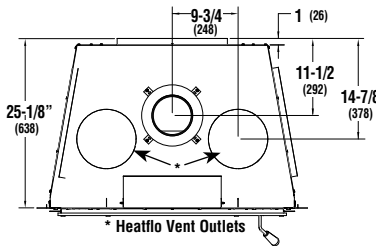

NOTES
Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
All framing dimensions include sheathing.
* The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with drywall panels around the fireplace.

INSTALLATION ACCESSORIES

- **6" diameter chimney - United States**
Model IHP Snap-Pak, including:
- Chimney lengths
- Elbows (where necessary)
- Associated components as per these installation instructions
- **6" diameter chimney - Canada ***
Security Chimney: Secure Temp ASHT+ or S2100+, DuraVent: DuraTech Canada or Duratech Premium, including:
- Chimney lengths
- Elbows (where necessary)
- Associated components as per the installation instructions & instructions provided by the venting manufacturer
- **Decorative Door** - Required (Order Separately)
- **Front Facade kit** - Required (Order Separately)
- **UZY6-B Blower Kit** (included)
- **VRUW Blower Speed Control** (included)
- **Outside Air Kit** (included)
- **Heatflo Convection Kit** (optional)
- **Forced Air Kit** (optional)
- **Finishing Guide Plate** (included on Fireplace)

*Available from Security Chimneys™
Inches (millimeters)

Page 1 of 2

P/N 900995-01, REV. B, 03/2021

Superior

Obadiah's • 406-300-1776

Framing Dimensions



Listing Information

Fireplace Dimensions

WCT6920WS

EPA Wood Burning Fireplaces Specifications

Typical Installations

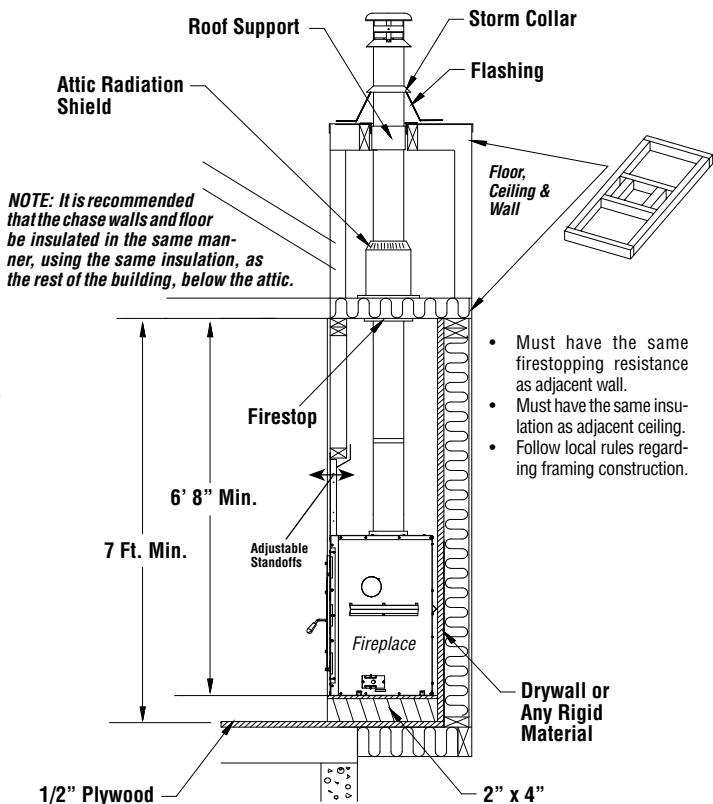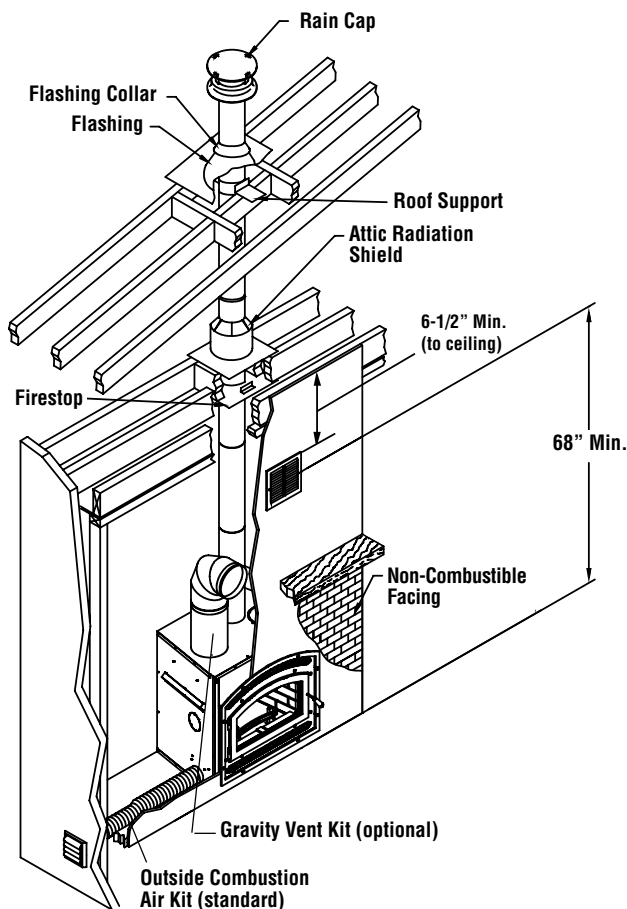

- Must have the same firestopping resistance as adjacent wall.
- Must have the same insulation as adjacent ceiling.
- Follow local rules regarding framing construction.

CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for a safe installation:

Side wall: 24" (610 mm) measured from the firebox opening.

Ceiling: 6' 8" (2032 mm) measured from the base of the fireplace.

Fireplace enclosure:


Bottom: 0"
Side: 0" to spacer
Back: 0" to spacer

Top: Do not fill the space above the fireplace with any material (Except the wood framing)

Chimney: 2" (50 mm)

Mantel: 39-1/2" (1004mm) minimum above base of unit.
 16" (407mm) maximum depth.

NOTE: Only non-combustible mantels may be used.

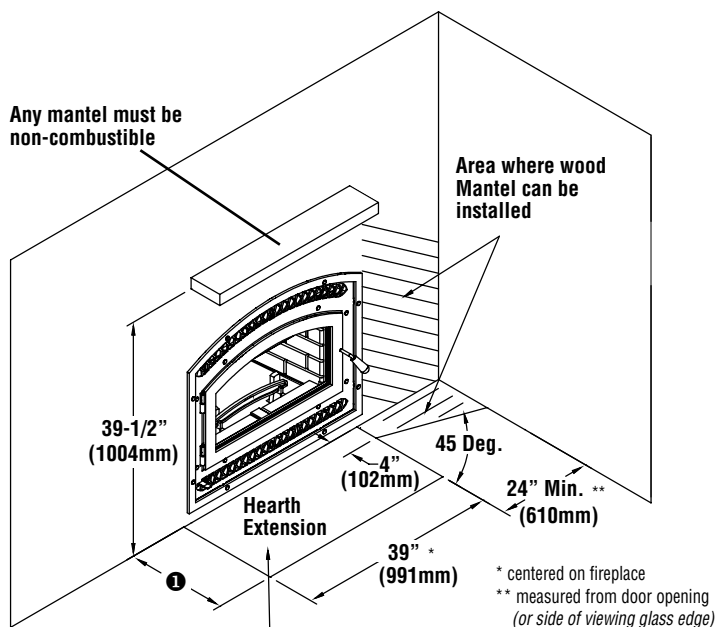

Minimum 1/2" Thick Non-Combustible Material

① USA = 16" (407mm) Min.
 Canada = 18" (457mm) Min.

* centered on fireplace
 ** measured from door opening (or side of viewing glass edge)

Combustible Clearances