

# *Valcourt*

*The Fireplace of Your Dreams*

Wood fireplaces  
DECORATIVE • PERFORMANCE

[www.valcourtinc.com](http://www.valcourtinc.com)







*Valcourt*

A legendary high quality fit and finish.  
Discover the perfect combination of  
performance, style and ambiance in the  
greatest respect for the environment.

*The Fireplace of Your Dreams*

# Contents

## For ambiance

|                    |    |
|--------------------|----|
| FP1LM - Manoir     | 8  |
| FP7CB - Antoinette | 10 |
| FP11 - Frontenac   | 12 |
| FP2 - Beaumont     | 14 |
| FP5 - Westmount    | 16 |
| FP16 - St-Laurent  | 18 |

## For performance

|                                                      |    |
|------------------------------------------------------|----|
| FP10 - Lafayette                                     | 22 |
| FP12 - Mundo                                         | 24 |
| FP14 - Cartier                                       | 26 |
| FP15 - Waterloo                                      | 28 |
| FP15A - Waterloo                                     | 30 |
| Heat distribution systems                            | 32 |
| Technical data                                       | 33 |
| Manufacturers, brands and types of approved chimneys | 35 |
| Fireplace accessories                                | 36 |
| Warranty                                             | 39 |





10



12



14



18



22



24



28



30



36

*Valcourt*

Images in this catalog are for reference only.  
Some changes may have been made to the products or technical data  
after the publication of this brochure. Valcourt reserves itself the right to  
modify its products without any obligation on its part.





# Decorative fireplaces

FOR AMBIANCE

The main purpose of these fireplaces is the ambiance and comfort of a wood fire, with doors opened or closed. If needed, they are also an alternate source of heat.





Decorative fireplace with modern style doors and traditional faceplate.



Decorative fireplace with modern style doors and traditional style faceplate and hot air gravity distribution kit.







Decorative fireplace with modern style doors and faceplate and hot air gravity distribution kit.



FP1LM - Manoir  
Decorative fireplace with modern style doors and faceplate.

The Manoir is the updated version of Valcourt's very first fireplace. Valcourt's fireplace doors are second to none and the Manoir is another good example of their uniqueness. The steel framed double doors with ceramic glass slide into each side of the fireplace, smoothly and easily, allowing for an exceptional view of the crackling flames. Thanks to the availability of two different styles of faceplates, this fireplace will enable you to be creative with your decor. Moreover, you can benefit from the Manoir's maximum heating output by using its included blower and its optional hot air distribution kits (gravity or forced air). All Valcourt fireplaces feature a heavy duty construction for guaranteed peace of mind. A real solid luxury that will provide years of relaxation for you and your family.

# FP1LM - Manoir

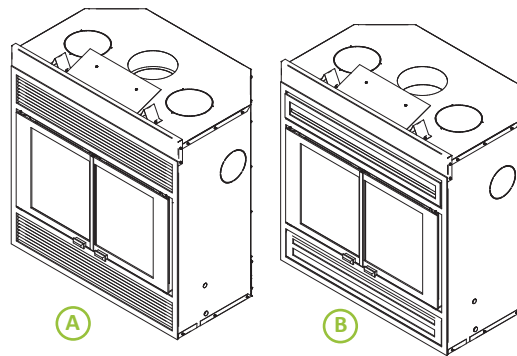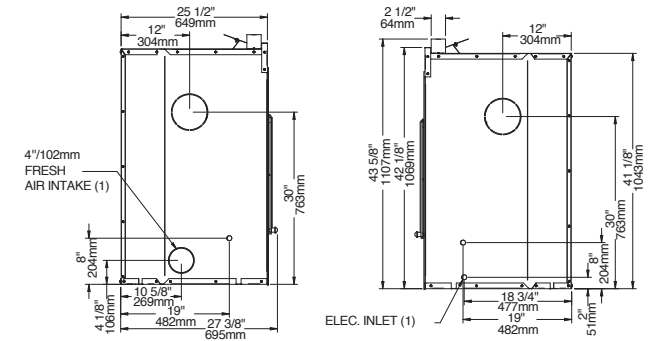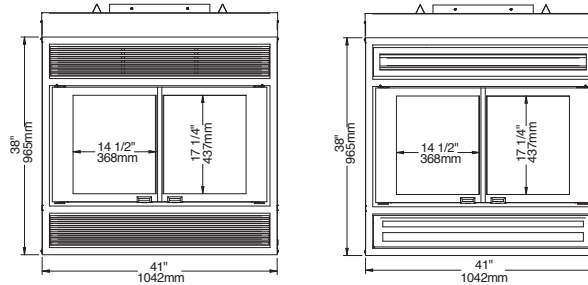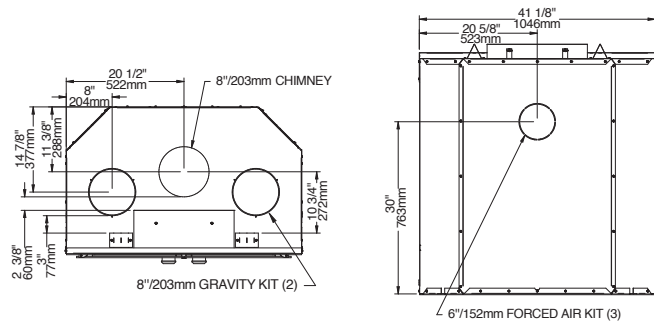

## Features

- Firebox volume of 4.25 cu. ft.
- Retractable ceramic glass doors
- Cast iron andirons
- Moulded refractory bricks
- Thermal activation blower with variable speed control
- Requires an 8" chimney
- Fresh air intake adapter included

## Required components

- Traditional style faceplate - metallic black (A)
- Modern style faceplate - metallic black (B)

## Options

- Hot air gravity distribution kit - modern style
- Hot air gravity distribution kit - traditional style
- Forced air distribution kit
- 6" x 25' insulated flex pipe for forced air distribution kit

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.



Modern  
style doors

This model is  
**EPA QUALIFIED**  
Under the LOW MASS  
Wood-Burning Fireplace Program  
**PHASE 2**  
EMISSION  
LEVEL

FP7CB-Antoinette  
Decorative fireplace with  
guillotine door and masonry trim.



Cast iron andirons



\*Contemporary



\*Classic

Decorative fireplace with guillotine  
door and narrow overlap.










Dare to design... the fireplace of your dreams, while being environmentally friendly.

The US Environmental Protection Agency (EPA) initiated a voluntary program for manufacturers of decorative wood burning fireplaces to encourage manufacturers to produce clean wood-burning appliances that reduce air pollution.

The FP7CB - Antoinette wood fireplace already qualifies for phase II of the EPA voluntary program. With emissions of 4.0 g/kg (approximately 70 percent cleaner than unqualified models), you can benefit from a product with low particulate emissions.

Another advantage of this Valcourt fireplace is its guillotine door that disappears to allow you to load wood on the fire or relax with the crackle of the open fireplace. The firescreen is also on a guillotine mechanism so you can close it when the ceramic glass door is open. Why Antoinette? Finally, a positive historical reference to the guillotine! The guillotine door and clean front gives you the flexibility to design your fireplace in any way that suits you. The Antoinette is a truly versatile fireplace and is all about giving you the ability to design your fireplace exactly how YOU want it to be.

# FP7CB - Antoinette

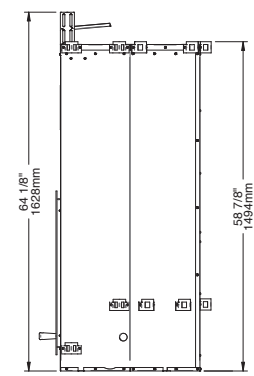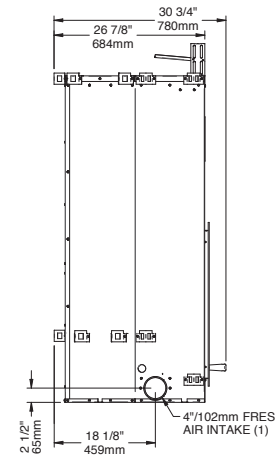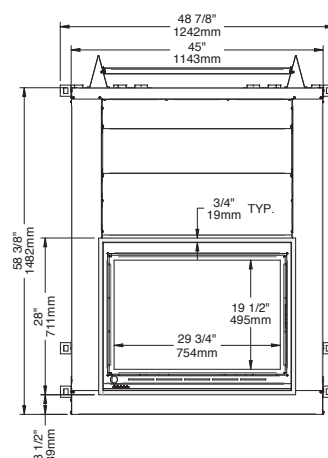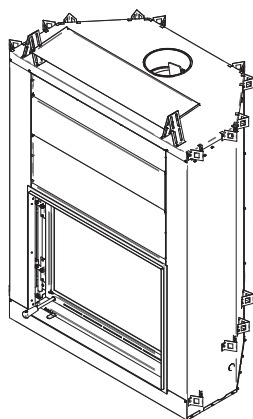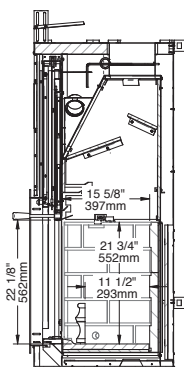


## Features

- Firebox volume of 5.3 cu. ft.
- Guillotine ceramic glass door
- Guillotine rigid fire screen door
- Cast iron andirons
- Moulded refractory bricks
- Requires an 8" chimney
- Fresh air intake adapter included


## Required components

- Narrow overlap; painted black
- Masonry trim
- Classic moulded refractory brick panel
- Contemporary moulded refractory brick panel

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.



\* Classic moulded refractory brick panel



\* Contemporary moulded refractory brick panel

This model is  
**EPA QUALIFIED**  
Under the LOW MASS  
Wood-Burning Fireplace Program  
**PHASE 2**  
EMISSION LEVEL



Clean burning decorative wood fireplace with guillotine door and arched narrow overlap.



Clean burning decorative wood fireplace with guillotine door and straight narrow overlap.



Clean burning decorative wood fireplace with guillotine door and straight masonry trim.



\* Herringbone




\* Classic



\* Contemporary



FP11 -Frontenac  
Clean burning decorative wood fireplace with guillotine door and arched masonry trim.

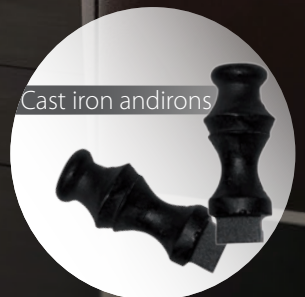

Cast iron andirons










# FP11 - Frontenac

Dare to design... the fireplace of your dreams, while being environmentally friendly!

Frontenac is not only the name of a grand hotel located in the heart of Quebec City, Canada. It is also the largest fireplace of the Valcourt brand. Majestic and imposing, this bravery symbol of the Count of Frontenac, who has fiercely defended the French colony, is quite appropriate to represent the enormous challenge overtaken when designing and manufacturing this fireplace. Exceptionally large, the FP11 - Frontenac uses advanced technology to reduce air pollution. Indeed, the FP11 - Frontenac already qualifies for Phase II of the US Environmental Protection Agency (EPA) voluntary program for manufacturers of decorative wood burning fireplaces.

With particulate emissions of 4.2 g/kg (which is approximately 70 percent cleaner than unqualified models), the FP11 - Frontenac will surely give you elegance without compromising air quality.

Just like the FP7CB - Antoinette, the FP11 - Frontenac has a guillotine door that disappears in the hearth, allowing you to easily load wood on the fire and have an unrivaled view of the flames. The firescreen is also equipped with a guillotine mechanism. You will thus enjoy an open fire safely when the ceramic glass door is open. Finally, the bare front allows significant flexibility and creativity in the design of your interior decor.

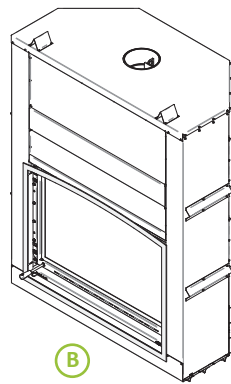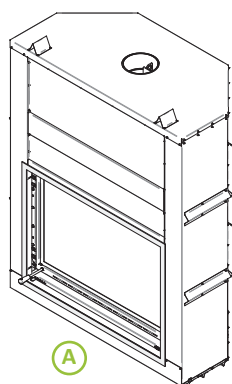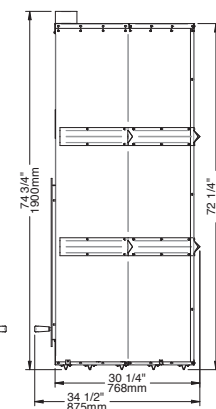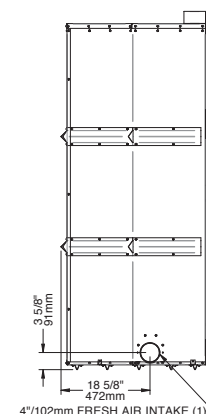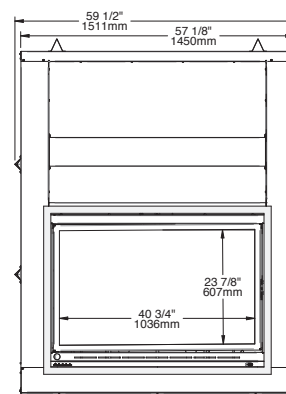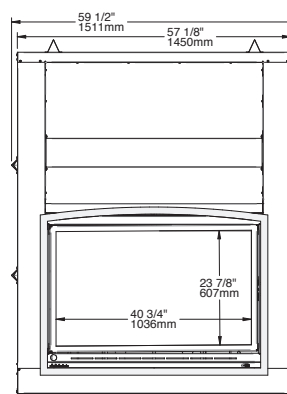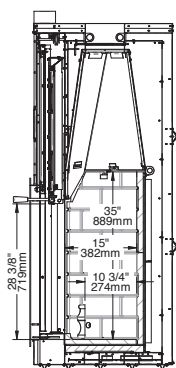

## Features

- Firebox volume of 9.4 cu. ft.
- Guillotine ceramic glass door
- Guillotine rigid firescreen door
- Cast iron andirons
- Three styles of firebox moulded refractory panels
- Requires an 8" chimney
- Fresh air intake adapter included

## Required components

- Straight narrow overlap (A)
- Arched narrow overlap (B)
- Arched masonry trim
- Straight masonry trim
- Classic moulded refractory brick panel
- Herringbone moulded refractory vermiculite panel
- Contemporary moulded refractory brick panel

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.



\* Herringbone moulded refractory vermiculite panel



\* Classic moulded refractory brick panel



\* Contemporary moulded refractory brick panel




Straight narrow overlap



Arched narrow overlap



Arched masonry trim



Straight masonry trim

This model is  
**EPA QUALIFIED**  
Under the LOW MASS  
Wood-Burning Fireplace Program  
**PHASE 2**  
EMISSION LEVEL



Decorative fireplace with modern style folding doors and narrow painted black overlap.



Decorative fireplace with modern style folding doors and large painted black overlap.





FP2-Beaumont  
Decorative fireplace with modern style folding doors and narrow brushed nickel plated overlap.

**EQUISS**  
**Fireplace tool sets**  
See page 36

Imagine yourself sitting on your sofa or perhaps in your bathtub, sipping your favorite beverage and watching the open fire as it dances, snaps and crackles in your Beaumont fireplace. What a delightful way to relieve yourself of the day's stress.

Ahhh... now doesn't that feel better?

# FP2 - Beaumont

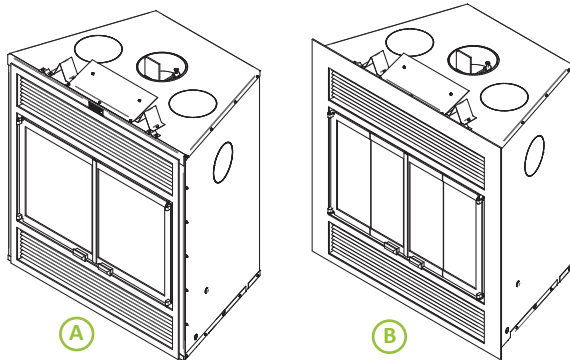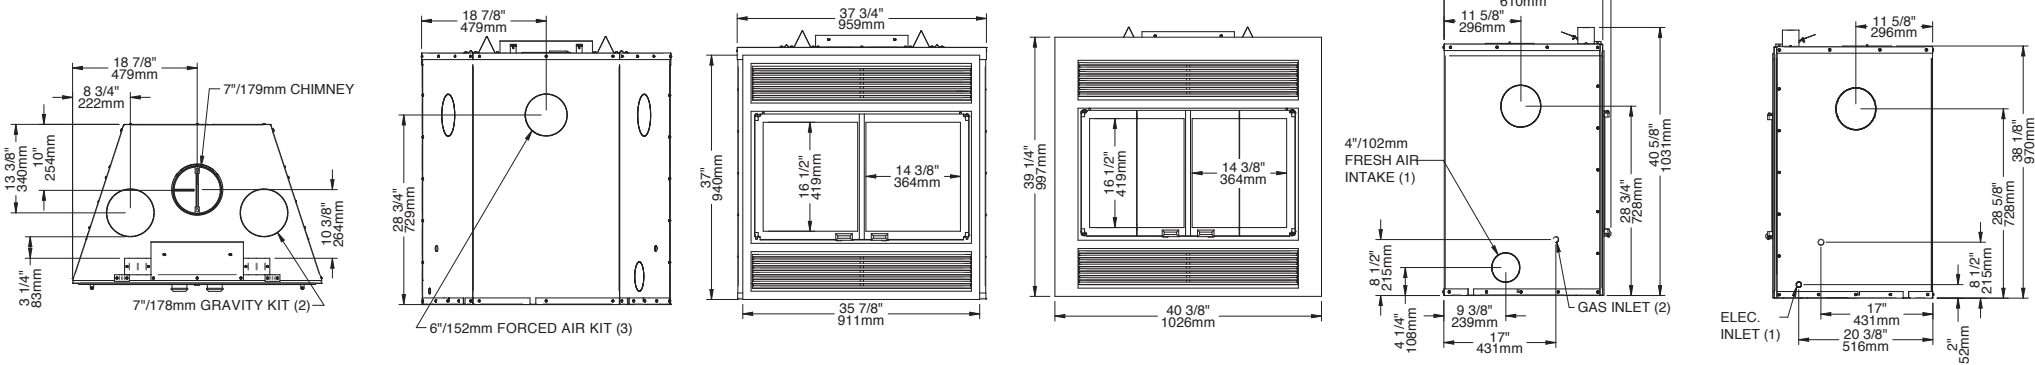

## Features

- Firebox volume of 3.0 cu. ft.
- Two styles of ceramic glass doors
- Rigid firescreen doors
- Tilt up cast iron grate
- Moulded refractory bricks
- Thermal activation blower with variable speed control
- Requires an 7" chimney
- Fresh air intake adapter included

## Required components

- A** Narrow overlap; painted black or brushed nickel plated
- B** Large overlap; painted black

## Options

- Hot air gravity distribution kit
- Forced air distribution kit
- 6" x 25' insulated flex pipe for forced air distribution kit

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.



Modern style doors



Modern style folding doors

This appliance is  
**EPA  
exempt**



Decorative fireplace  
with modern style doors and  
narrow brushed nickel plated overlap.



Decorative fireplace  
with modern style  
doors and large overlap.





FP5 -Westmount  
Decorative see-through wood fireplace with modern  
style folding doors and painted black narrow overlap.

So what's better than a Valcourt fireplace in one room? How about a Valcourt fireplace that has a face in two rooms at the same time? A double sided Valcourt fireplace. That is what the Westmount gives to the Valcourt line. Great in a master suite between the bedroom and bathroom. Very romantic. Or how about between a dining room and a living room? Or maybe between a dining room and a kitchen.

Whatever or wherever you desire a see-through fireplace, the Westmount is there for you.

Enjoy the fire wherever you may happen to be!

# FP5 - Westmount

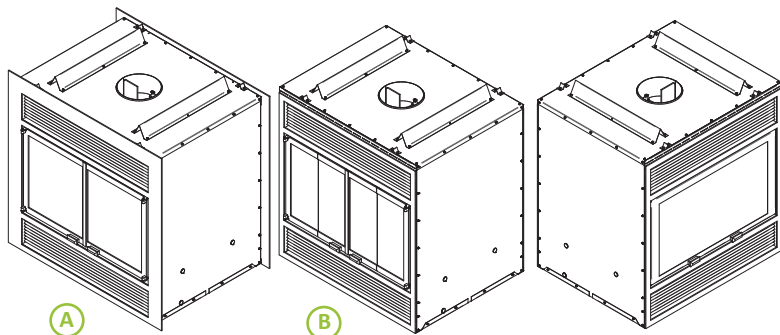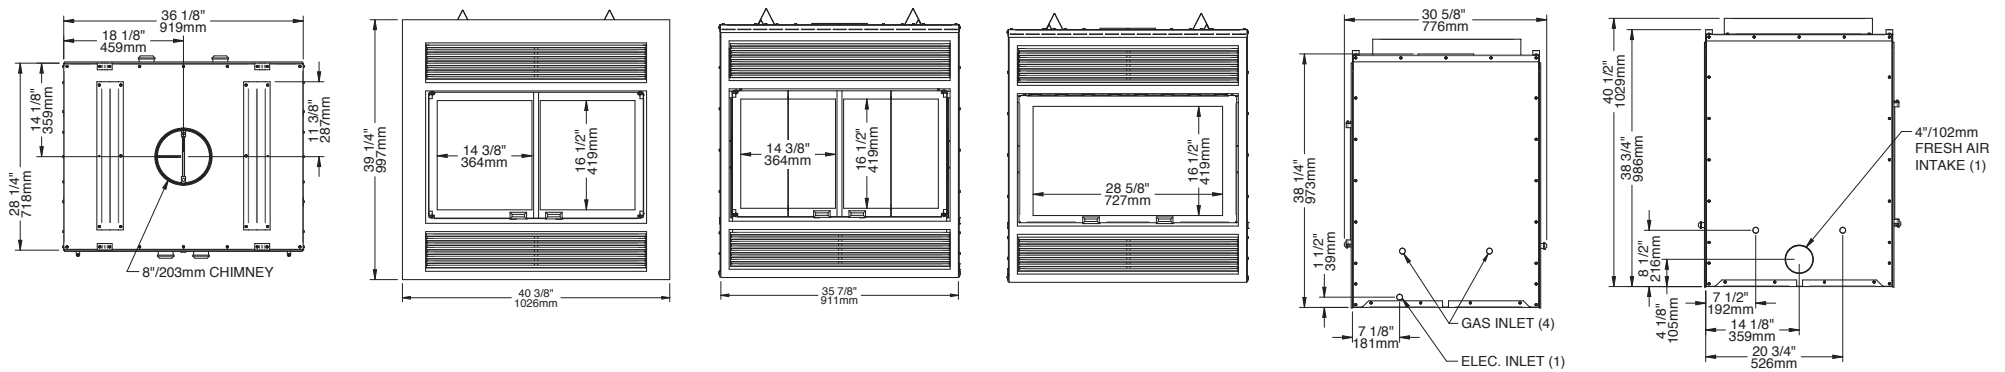

Back view

## Features

- See-through fireplace
- Firebox volume of 3.5 cu. ft.
- Two styles of ceramic glass doors
- Second side with fixed ceramic glass
- Rigid firescreen doors
- Cast iron grate
- Moulded refractory bricks
- Requires an 8" chimney
- Fresh air intake adapter included

## Required components

- A** Large overlap; painted black
  - B** Narrow overlap; painted black or brushed nickel plated
- (To complete the installation, two sets of overlaps must be ordered. One for each side).

## Option

Thermal activation blower with variable speed control



Modern style doors



Modern style folding doors

This appliance is  
**EPA  
exempt**



FP16-St-Laurent  
Decorative fireplace with guillotine door and black straight narrow overlap.

This amazing large decorative wood-burning fireplace will become the centerpiece of your home. Its perfect rectangle gives it a sleek, modern look and its elongated shape produces a warm enchanting effect in the room.

**Convenient.** Its guillotine glass door is easily lifted to provide ample room for loading wood.

**Secure.** The firescreen lets you enjoy the warmth in a natural setting while protecting from sparks.

## Features

Firebox volume of 6.4 cu. ft.  
Maximum log length 30"  
Guillotine ceramic glass door  
Steel frame door  
Requires an 8" chimney

### Required components


- Black straight masonry trim (gives a flush finish with brick or stone)
- Black straight narrow overlap (to overlap thin facing materials like tile)
- Contemporary moulded refractory brick panels

### Option

4" fresh air intake register with airtight damper

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

This appliance is  
**EPA  
exempt**

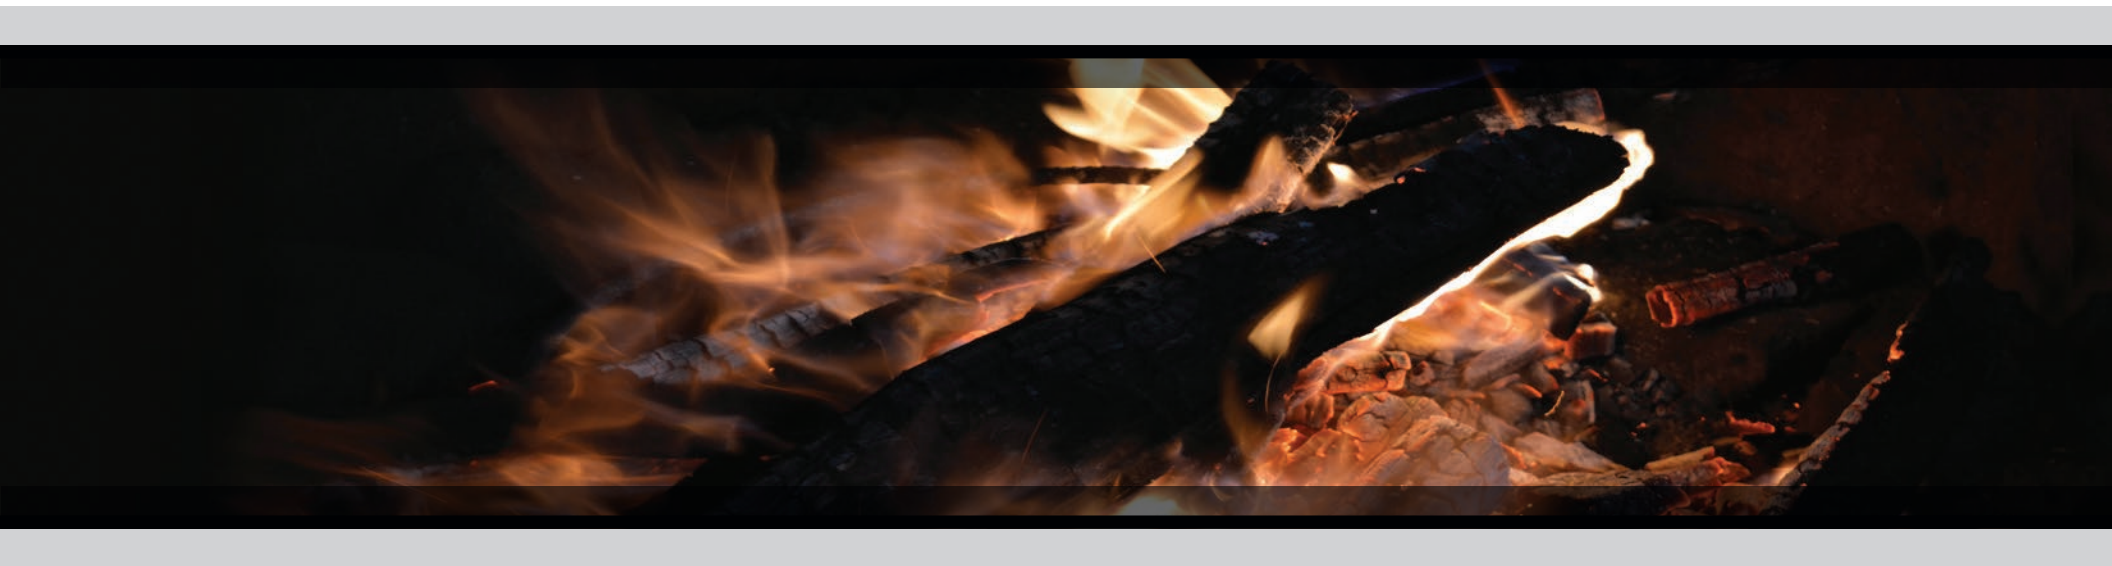



# Prefabricated fireplaces

FOR PERFORMANCE

The main purpose of these fireplaces is eco-friendly heating with emissions below the limits imposed by EPA and the benefits of an efficient overnight burn. If needed, they can be used for ambiance with the doors open.



Performance fireplace with "Victoria" style faceplate and brushed nickel plated door overlay.






Performance fireplace with "Crown" style faceplate and black door overlay.



FP10 -Lafayette  
Performance fireplace with "Crown" style faceplate and brushed nickel plated door overlay.

Lafayette, the French officer and hero of the American Revolution, inspired us to create our newest high efficiency fireplace. As the great general, Valcourt used its tactical skills in developing the Lafayette fireplace so it provides home heating with superb efficiency and elegance. Further to offering a revolutionary look, Lafayette meets the highest EPA emissions requirements, making it the fireplace of choice for the new generation of consumers who want to use wood as a renewable and clean source of heat.

# FP10 - Lafayette

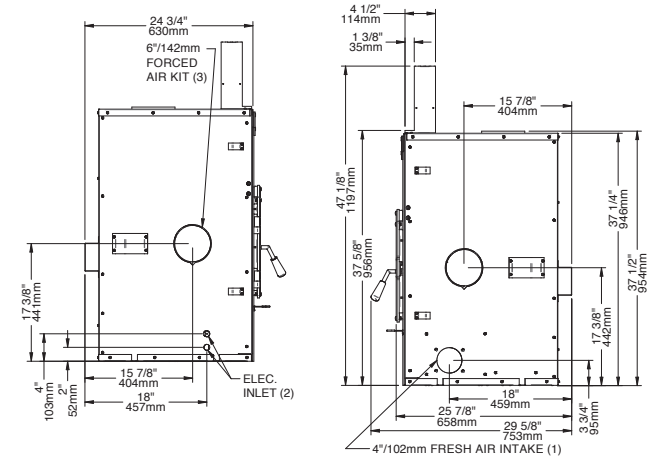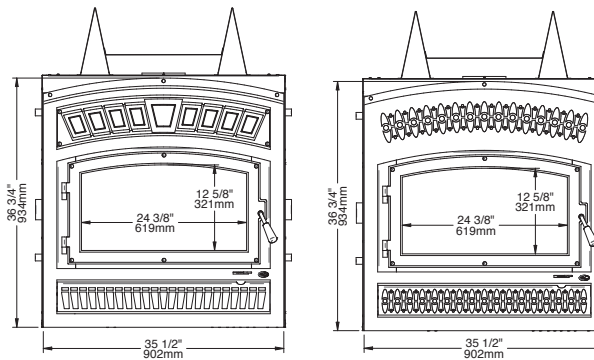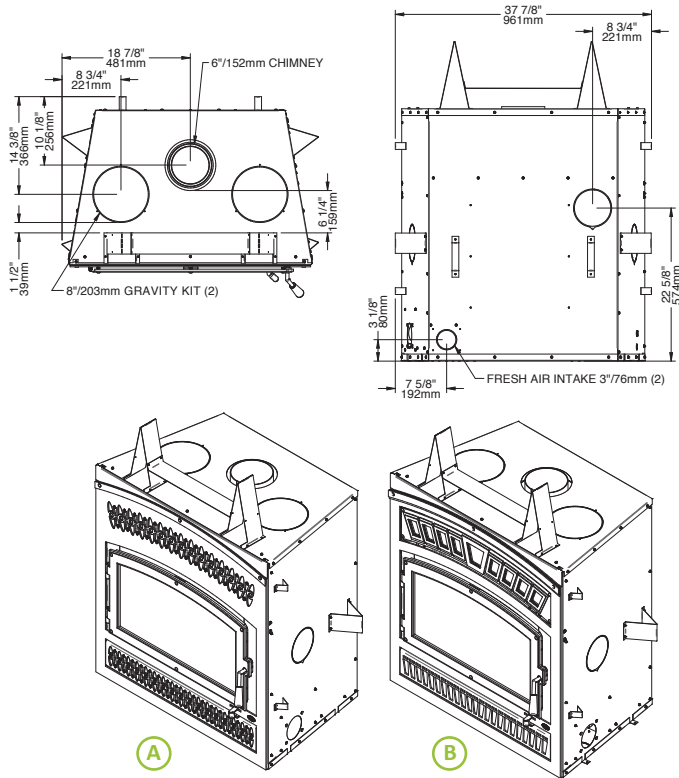

## Features

- Firebox volume of 2.5 cu. ft.
- Controlled combustion
- Thermal activation blower with variable speed control
- EPA Certified at 4.4 g/h
- Moulded refractory bricks
- Cast iron andiron
- Requires an 6" chimney\*
- Fresh air intake adapter included

## Required components

- Steel door overlay; painted black or brushed nickel plated
- "Victoria" style faceplate, painted black (A)
- "Crown" style faceplate, painted black or brushed nickel plated (B)

## Options

- Rigid firescreen
- Hot air gravity distribution kit - modern with adjustable pipes
- Hot air gravity distribution kit - traditional style
- Forced air distribution kit
- 6" x 25' insulated flex pipe for forced air distribution kit

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

\*This high efficiency wood burning fireplace may also be installed with an 7" chimney. See owner's manual for more details.

EPA  
≤4.5 g/h



Performance fireplace with traditional style hot air gravity distribution kit and optional metallic black finishing trim.



**DUPLEX**  
Fireplace tool sets  
See page 36









FP12 - Mundo  
Performance fireplace with optional metallic black finishing trim and hot air gravity distribution kit - modern with adjustable pipes.

With its straight lines, simplistic shape and neutral color, the FP12-Mundo brings a gust of modernism into your home. It harmonizes both functionality and comfort perfectly. Moreover, with its extra large clean face glass, the Mundo offers a view on the fire that is unmatched in the industry.

This ecological fireplace is EPA certified with an emissions rate of 4.4 g/h and produces up to 75,000 BTU/h. The hot air gravity distribution kit (modern or traditional style), mandatory on the Mundo, will help you harness all the power from this incredible fireplace while keeping in mind the contemporary lines of your decor. The most serious of users will also want to install the forced air distribution kit which will allow for better and more efficient heat transfer to rooms further from the fireplace.

# FP12 - Mundo

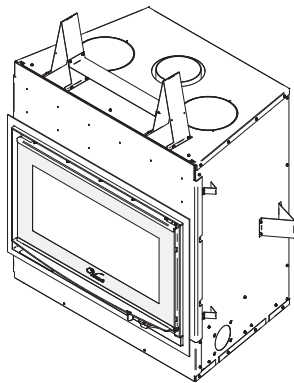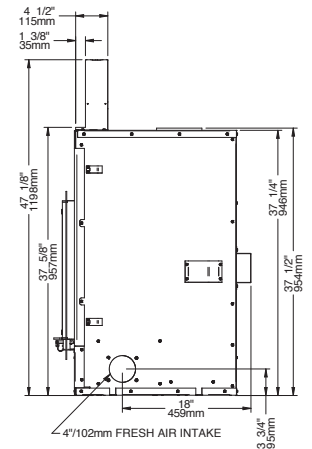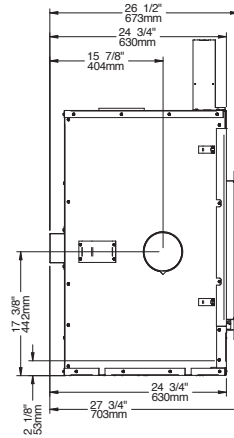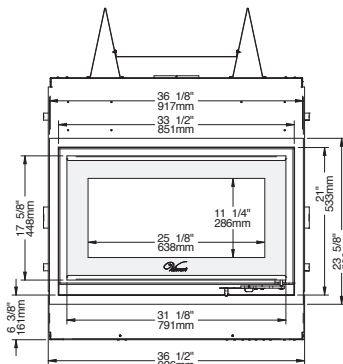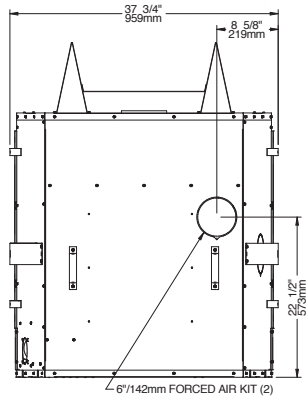

## Features

- Firebox volume of 2.5 cu. ft.
- Extra large clean face glass
- Cast iron andiron
- Moulded refractory bricks
- Requires a 6" chimney
- Fresh air intake adapter included\*

## Required components

- Hot air gravity distribution kit - modern with adjustable pipes or
- Hot air gravity distribution kit - traditional style

## Options

- Firescreen
- Metallic black finishing trim
- Forced air distribution kit (Heat activated. Only available on modern with adjustable pipes hot air gravity distribution kit).
- 6" x 25' insulated flex pipe for forced air distribution kit

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

\*The installation of a fresh air intake kit is mandatory on the FP12. The fresh air intake adapter is provided with the fireplace.

EPA  
≤4.5 g/h



Performance fireplace with modern style faceplate and hot air gravity distribution kit – modern with adjustable pipes.

**INEO**  
Fireplace tool sets  
See page 36







Performance fireplace with modern style faceplate and traditional style hot air gravity distribution kit.



FP14 - Cartier  
Performance fireplace with  
black door overlay and modern style faceplate.

The Cartier fireplace honours its namesake, Jacques Cartier, the famous European explorer. Once again, Valcourt explores new avenues of design and introduces a fireplace which gracefully blends a contemporary design with the functionality of a traditional fireplace. The Cartier has a clean, large steel door allowing a perfect view of the fire without compromising its efficiency. In addition, you can always customize your decor with the two available choices of overlays. Thanks to its optional blower and its heat-releasing louver strategically positioned above the glass, the Cartier is a perfect choice for an environmentally-sound, efficient, and stylish heating alternative.

# FP14 - Cartier

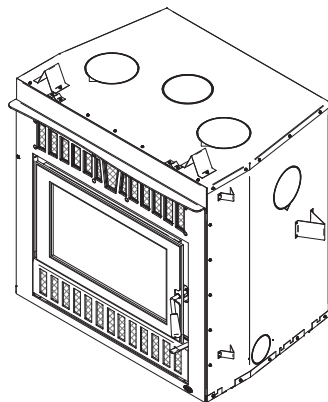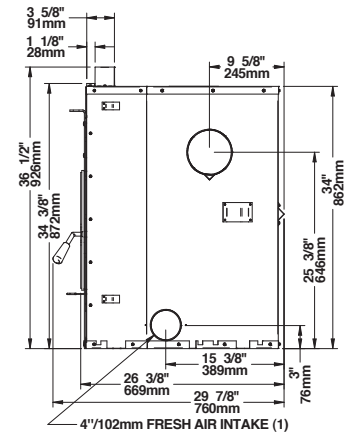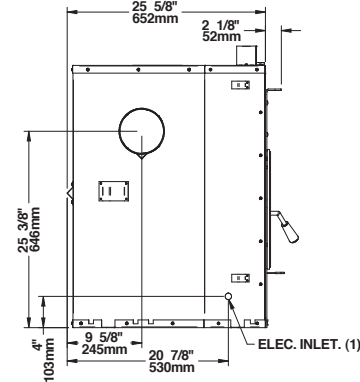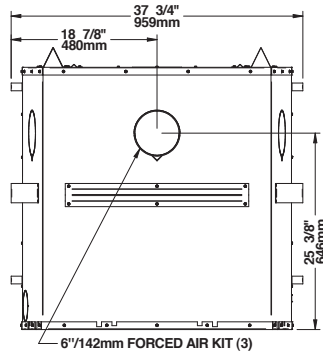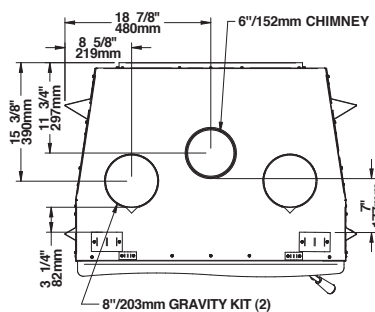

## Features

- Firebox volume of 2.3 cu. ft.
- Cast iron door
- Cast iron andiron
- Moulded refractory bricks
- Requires a 6" chimney
- Fresh air intake adapter included

## Required components

- Door overlay; painted black or brushed nickel plated
- Black modern style faceplate with brushed nickel accent

## Options

- Firescreen
- Thermal activation blower with variable speed control
- Hot air gravity distribution kit - modern with adjustable pipes
- Hot air gravity distribution kit - traditional style
- Forced air distribution kit
- 6" x 25' insulated flex pipe for forced air distribution kit
- Heat shield for surround/shelf\*

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

\* The heat shield for surround/shelf AC01324 option is mandatory for the installation of a combustible shelf above the FP14 fireplace.

EPA  
≤4.5 g/h

Montreal  
APPROVED  
<2.5 g/h

INEO  
Fireplace  
tool sets  
See page 36

FP15 - Waterloo  
Performance fireplace with  
painted black "Crown" style faceplate.

# FP15 - Waterloo

## Imagine a gigantic high-efficiency fireplace


This fireplace is startling in size and is a logical and environmentally friendly option for any homeowner looking to combine style and high efficiency. With its ornamental façade, it will be the focal point of any room.

**Large wood fireplace.** Behind its large glass door, the 4.3 cubic foot combustion chamber can hold an impressive 60 lb of wood.

**Low emissions.** This energy efficient fireplace complies with the EPA's clean-air standards (only 1.6 g/h of emissions).

**High efficiency.** The FP15 fireplace is capable of heating large spaces and burns for 10 hours.

A hot start is always your best guarantee for a clean burn. The FP15 uses an automated combustion air intake system that allows the fire to reach an ideal temperature before going into slow burn mode. The result is very low emissions, without the need for a catalytic combustor.

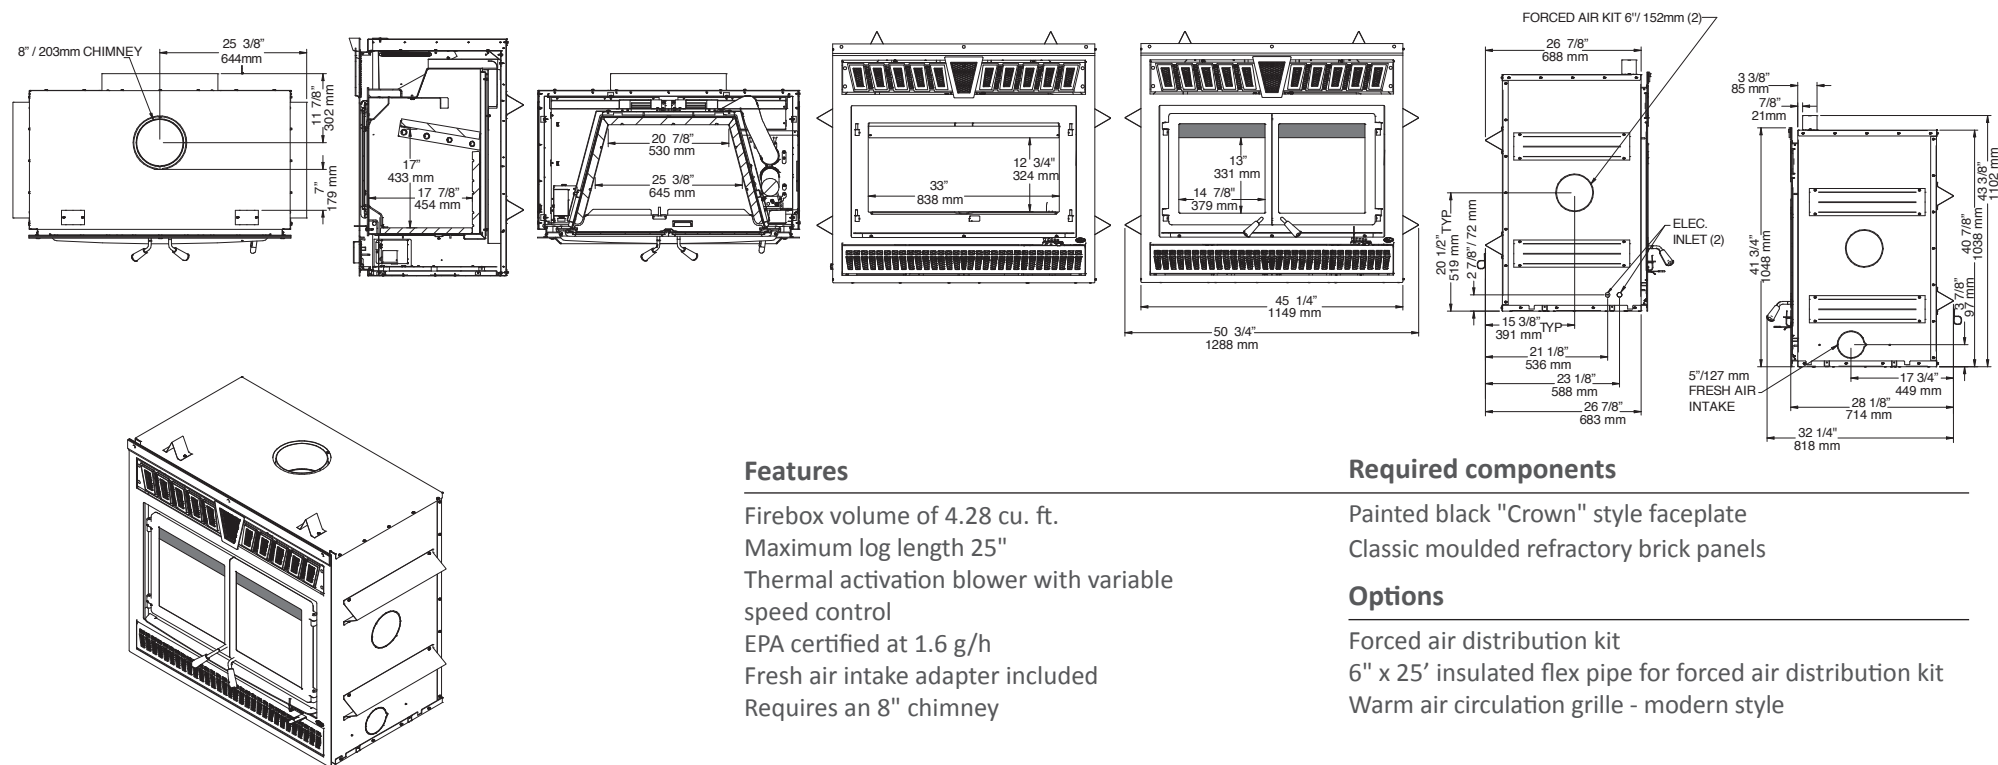

## Features

- Firebox volume of 4.28 cu. ft.
- Maximum log length 25"
- Thermal activation blower with variable speed control
- EPA certified at 1.6 g/h
- Fresh air intake adapter included
- Requires an 8" chimney

## Required components

- Painted black "Crown" style faceplate
- Classic moulded refractory brick panels

## Options

- Forced air distribution kit
- 6" x 25' insulated flex pipe for forced air distribution kit
- Warm air circulation grille - modern style

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

Montreal  
APPROVED  
≤ 2.5 g/h

EPA  
2020  
Approved

EPA  
≤ 2.5 g/h



Performance fireplace  
with "Mission" style arched faceplate.



Performance fireplace  
with "Classic" style arched faceplate.



Performance fireplace  
with "Arabesque" style arched faceplate.

**NON-COMBUSTIBLE  
MANTEL.**  
Fireplace accessories  
See page 38

**INEO  
Fireplace  
tool sets**  
See page 36

**Montreal  
APPROVED**  
<2.5 g/h

FP15A - Waterloo  
Performance fireplace with "Urban" style arched faceplate.

# FP15A - Waterloo

## Imagine a Gigantic High-Efficiency Fireplace


This fireplace is startling in size and is a logical and environmentally friendly option for any homeowner looking to combine style and high efficiency. Choose from four beautiful faceplate louvres to personalize your home.

**Large wood fireplace.** Behind its large glass door, the 4.3 cubic foot combustion chamber can hold an impressive 60 lbs of wood.

**Low emissions.** This energy efficient fireplace complies with the EPA's clean-air standards with only 1.6 g/h of emission.

**High efficiency.** The FP15A fireplace is capable of heating large spaces and burns for 10 hours.

A hot start is always your best guarantee for a clean burn. The FP15A uses an automated combustion air intake system that allows the fire to reach an ideal temperature before going into slow burn mode. The result is very low emissions, without the need for a catalytic combustor.

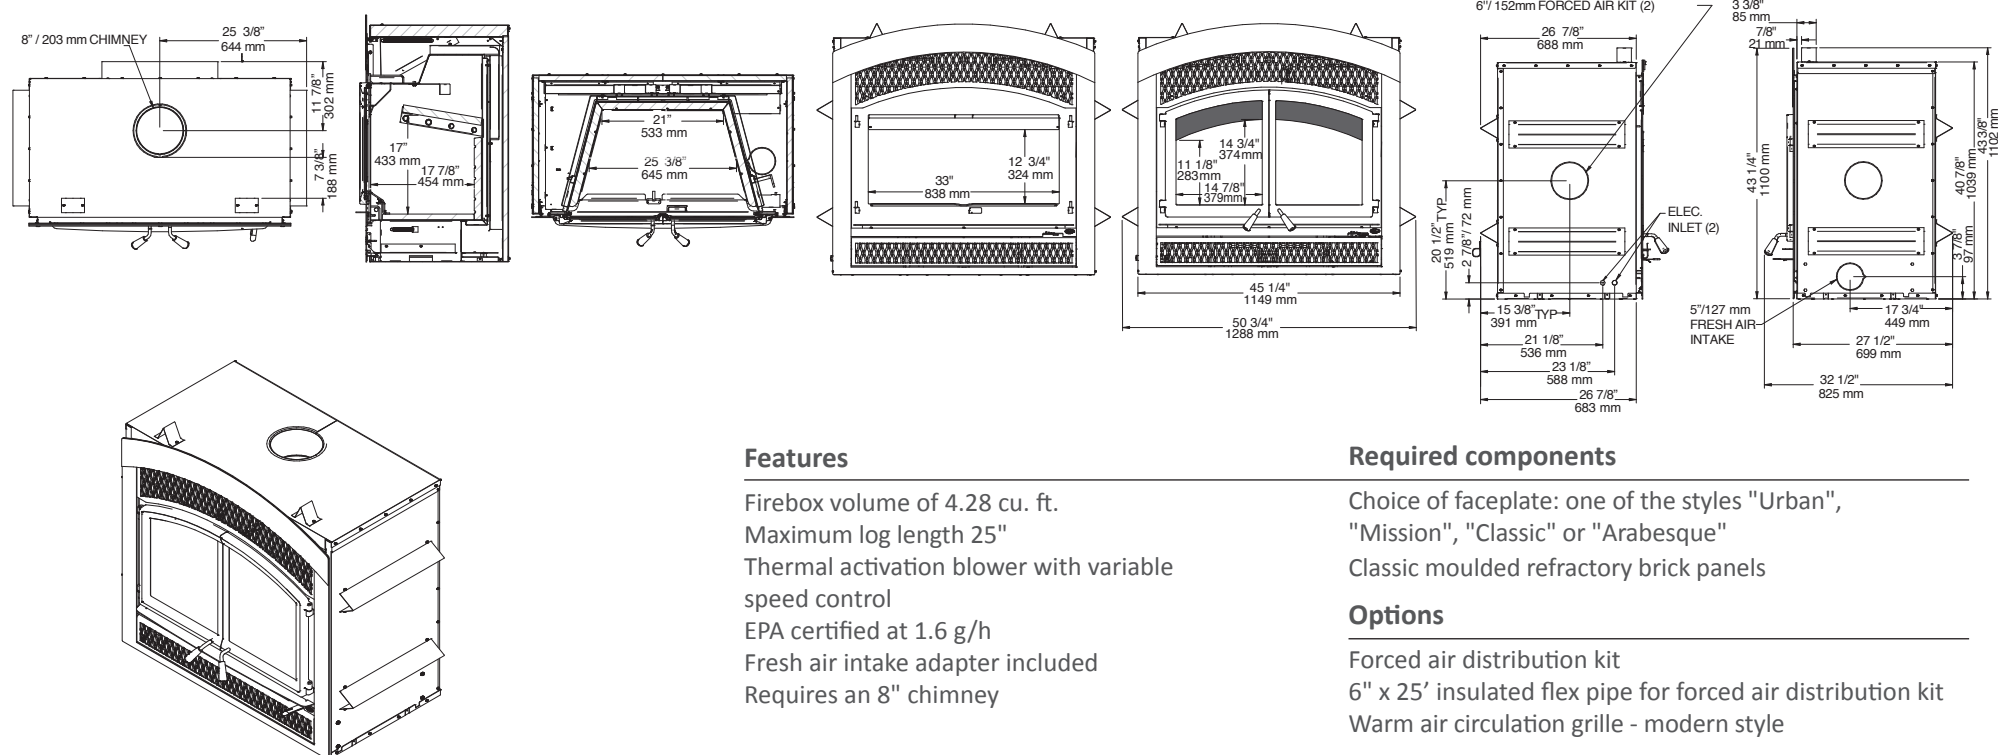

## Features

- Firebox volume of 4.28 cu. ft.
- Maximum log length 25"
- Thermal activation blower with variable speed control
- EPA certified at 1.6 g/h
- Fresh air intake adapter included
- Requires an 8" chimney

## Required components

Choice of faceplate: one of the styles "Urban", "Mission", "Classic" or "Arabesque"

Classic moulded refractory brick panels

## Options

Forced air distribution kit

6" x 25' insulated flex pipe for forced air distribution kit

Warm air circulation grille - modern style

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

Montreal  
APPROVED  
≤ 2.5 g/h



EPA  
2020  
Approved

EPA  
≤ 2.5 g/h

# Heat distribution systems

EPA certified wood fireplaces generate a lot of heat. For the most part, they generate too much for the room where they are located. Therefore, you need to manage the excess heat and send it where it is needed. To provide a solution, our research and development laboratory has designed the HEAT DISTRIBUTION SYSTEM, an innovative technology that allows the recovery of the heat produced during combustion and redirects it into distribution ducts to heat other areas in your home.

## Forced air distribution kit

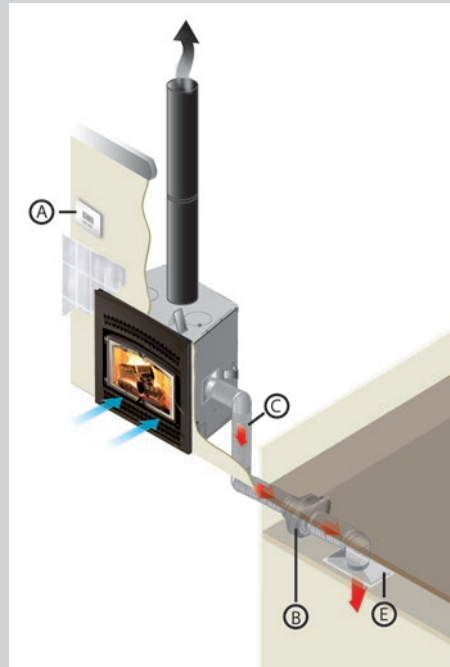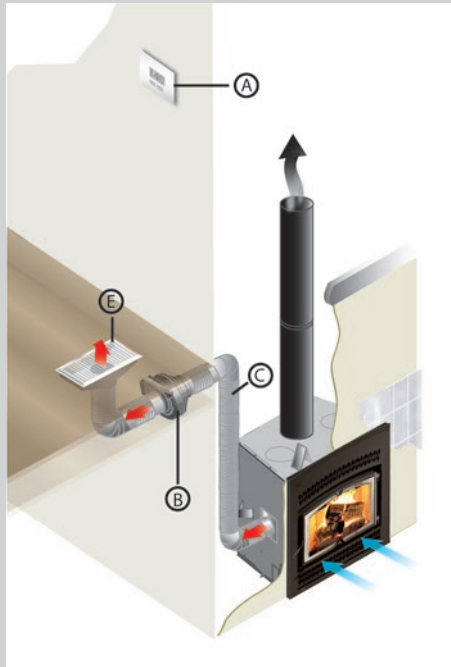


This system allows you to manage the heat distribution automatically. Using a wall thermostat, you can select the temperature you want to maintain in the room where the fireplace is located. Once the thermostat is satisfied, the excess heat is redirected to another room up to 50 feet (15 m) away from the fireplace using a 300 CFM blower. That way, you can enjoy a nice fire in your living room without the discomfort of excess heat generated by your Valcourt fireplace.

The system can also be used to supplement heat in a room remote from the fireplace. For this type of application, the thermostat needs to be positioned in the desired room and programmed with the temperature to be maintained. The system, now in "heat mode", will activate the blower as long as the temperature in the remote room is not achieved and that the fireplace has enough heat to distribute.

## Hot air gravity distribution kit

Valcourt also offers you another way to distribute excess heat into your home with the help of a hot air gravity distribution kit.

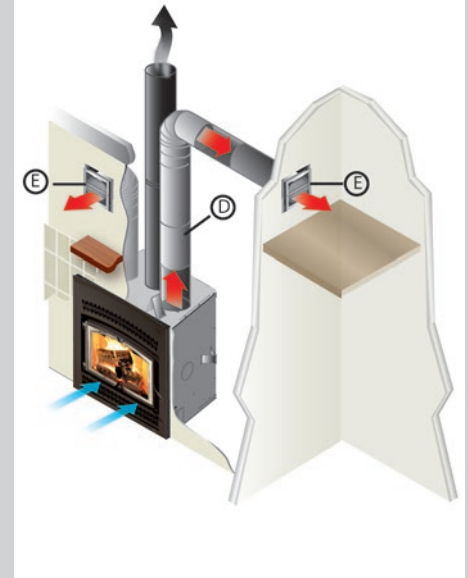


The Hot air gravity kit allows you to bring hot air into the same room as the fireplace, in adjacent rooms, or up-stairs at a maximum distance of 10' (3 m). The minimum height of the hot air duct must be 68" (1.7 m) measured from the base of the fireplace to the top of the hot air register.

Suggested installation: A) Wall thermostat B) 300 CFM blower C) Hot air flexible pipe D) Hot air rigid pipe E) Air register. The information contained in this page is for information purposes only.

For more details about the installation requirements of the kits and their content, please refer to the owner's manuals. For more installation options or more details on the **forced air distribution kit** or the **hot air gravity distribution kit**, visit [www.valcourtinc.com/en/service-support/heat-distribution-system](http://www.valcourtinc.com/en/service-support/heat-distribution-system)

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

# Technical data

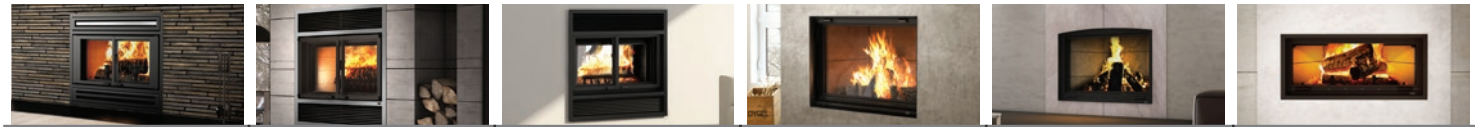

|                                                              | FP1LM                                | FP2                      | FP5                      | FP7LM                        | FP11                         | FP16                         |
|--------------------------------------------------------------|--------------------------------------|--------------------------|--------------------------|------------------------------|------------------------------|------------------------------|
| Color                                                        | Black                                | Black                    | Black                    | Black                        | Black                        | Black                        |
| Combustion technology                                        | Non-catalytic                        | Non-catalytic            | Non-catalytic            | Non-catalytic                | Non-catalytic                | Non-catalytic                |
| Maximum recommended area (with forced air kit)               | N/A                                  | N/A                      | N/A                      | N/A                          | N/A                          | N/A                          |
| Overall heat output rate (min. to max.)                      | N/A                                  | N/A                      | N/A                      | N/A                          | N/A                          | N/A                          |
| Maximum heat output (dry cordwood)                           | N/A                                  | N/A                      | N/A                      | N/A                          | N/A                          | N/A                          |
| Optimum efficiency                                           | N/A                                  | N/A                      | N/A                      | N/A                          | N/A                          | N/A                          |
| Door opening dimensions (W x H)                              | 30" x 17 7/8"                        | 28 1/4" x 14 1/2"        | 28 1/4" x 13 1/8"        | 33" x 22 3/4"                | 44 1/2" x 26 1/2"            | 44 1/2" x 15 1/2"            |
| Firebox dimensions (W x D)                                   | 23 3/8" x 11 3/8"                    | 18 3/4" x 10"            | 24 3/4" x 15 3/8"        | 24 1/4" x 11 1/2"            | 31 3/4" x 10 3/4"            | 31 7/8" x 10 3/4"            |
| Firebox volume (excluding grate or andirons)                 | 4.25 cu. ft.                         | 3 cu. ft.                | 3.5 cu. ft.              | 5.3 cu. ft.                  | 9.4 cu. ft.                  | 6.4 cu. ft.                  |
| Glass viewing area (W x H)                                   | 29" x 17 1/4"                        | 28 3/4" x 16 1/2"        | 28 3/4" x 16 1/2"        | 29 3/4" x 19 1/2"            | 40 3/4" x 23 7/8"            | 40 3/4" x 12 3/8"            |
| Door type                                                    | Double retractable, with steel frame | Double, with steel frame | Double, with steel frame | Guillotine, with steel frame | Guillotine, with steel frame | Guillotine, with steel frame |
| Maximum log length                                           | 20"                                  | 16"                      | 18"                      | 18"                          | 30"                          | 30"                          |
| Log positioning                                              | East / West                          | East / West              | East / West              | East / West                  | East / West                  | East / West                  |
| Flue spigot diameter                                         | 8"                                   | 7"                       | 8"                       | 8"                           | 8"                           | 8"                           |
| Minimum chimney height (from floor)                          | 15'                                  | 15'                      | 15'                      | 15'                          | 18'                          | 15'                          |
| Glass type                                                   | Ceramic glass                        | Ceramic glass            | Ceramic glass            | Ceramic glass                | Ceramic glass                | Ceramic glass                |
| Fresh air intake adapter (diameter)                          | Yes (4")                             | Yes (4")                 | Yes (4")                 | Yes (4")                     | Yes (4")                     | Yes (4")                     |
| Warranty                                                     | Limited lifetime                     | Limited lifetime         | Limited lifetime         | Limited lifetime             | Limited lifetime             | Limited lifetime             |
| Test standard - Safety                                       | ULC-S610 / UL127                     | ULC-S610 / UL127         | ULC-S610 / UL127         | ULC-S610 / UL127             | ULC-S610 / UL127             | ULC-S610 / UL127             |
| Test standard - Emissions                                    | ASTM 2515 / ASTM 2558                | EPA Exempt               | EPA Exempt               | ASTM 2515 / ASTM 2558        | ASTM 2515 / ASTM 2558        | EPA Exempt                   |
| EPA voluntary program -Emissions (ASTM 2515 / ASTM 2558)     | 2.9 g/kg                             | N/A                      | N/A                      | 4.0 g/kg                     | 4.2 g/kg                     | N/A                          |
| Clearances to combustible materials                          |                                      |                          |                          |                              |                              |                              |
| Back wall                                                    | 0"                                   | 0"                       | 0"                       | 0"                           | 0"                           | 0"                           |
| Sides                                                        | 0"                                   | 0"                       | 0"                       | 0"                           | 0"                           | 0"                           |
| Floor                                                        | 0"                                   | 0"                       | 0"                       | 0"                           | 0"                           | 0"                           |
| Combustible shelf (from the base of fireplace)               | 48"                                  | 46"                      | 46"                      | 46"                          | 52"                          | 48"                          |
| Side mantle <sup>(1)</sup>                                   | 0"                                   | 0"                       | 0"                       | 8"                           | 8"                           | 8 1/2"                       |
| Side wall <sup>(2)</sup>                                     | 24"                                  | 24"                      | 24"                      | 8"                           | 8"                           | 24"                          |
| Non-combustible surround (top)                               | 0"                                   | 0"                       | 0"                       | 27 1/4"                      | 38"                          | 64 3/4" **                   |
| Non-combustible surround (sides)                             | 0"                                   | 0"                       | 0"                       | 5 3/8"                       | 8"                           | 8 3/4"                       |
| Exterior dimensions and weight                               |                                      |                          |                          |                              |                              |                              |
| Height                                                       | 43 5/8"                              | 40 5/8"                  | 40 1/2"                  | 64 1/8"                      | 74 3/4"                      | 63 3/4"                      |
| Width                                                        | 41 1/8"                              | 37 3/4"                  | 36 1/8"                  | 48 7/8"                      | 59 1/2"                      | 62 5/8"                      |
| Depth                                                        | 27 3/8"                              | 25 1/4"                  | 30 5/8"                  | 30 3/4"                      | 34 1/2"                      | 31 3/4"                      |
| Weight                                                       | 236 kg (520 lb)                      | 191 kg (421 lb)          | 232 kg (511 lb)          | 305 kg (673 lb)              | 417 kg (920 lb)*             | 347 kg (765 lb)              |
| Narrow overlap; painted black                                | N/A                                  | Optional                 | Optional                 | N/A                          | N/A                          | Optional                     |
| Narrow overlap; brushed nickel plated                        | N/A                                  | Optional                 | Optional                 | N/A                          | N/A                          | N/A                          |
| Large overlap; painted black                                 | N/A                                  | Optional                 | Optional                 | N/A                          | N/A                          | Optional                     |
| Modern style door; standard or folding                       | N/A                                  | Optional                 | Optional                 | N/A                          | N/A                          | N/A                          |
| Blower with variable speed                                   | Standard                             | Standard                 | Optional                 | N/A                          | N/A                          | N/A                          |
| Hot air gravity distribution kit (diameter)                  | Optional (8")                        | Optional (7")            | N/A                      | N/A                          | N/A                          | N/A                          |
| Forced air distribution kit (diameter)                       | Optional (6")                        | Optional (6")            | N/A                      | N/A                          | N/A                          | N/A                          |
| Firescreen door                                              | Standard                             | Standard                 | Standard                 | Standard                     | Standard                     | Standard                     |
| 6" x 25' insulated flex pipe for forced air distribution kit | Optional                             | Optional                 | N/A                      | N/A                          | N/A                          | N/A                          |

<sup>(1)</sup> Subject to a maximum protrusion - see owner's manual. <sup>(2)</sup> From door opening. \*Without refractory bricks. \*\*From the base of the fireplace.

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

# Technical data



|                                                               | FP10                         | FP12                         | FP14                         | FP15                         | FP15A                        |
|---------------------------------------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| Color                                                         | Black                        | Black                        | Black                        | Black                        | Black                        |
| Combustion technology                                         | Non-catalytic                | Non-catalytic                | Non-catalytic                | Non-catalytic                | Non-catalytic                |
| Maximum recommended area (with forced air kit) <sup>(1)</sup> | 2,100 sq. ft.                | 2,100 sq. ft.                | 1,900 sq. ft.                | 2,800 sq. ft.                | 2,800 sq. ft.                |
| Overall heat output rate (min. to max.)                       | 11,500 BTU/h to 30,500 BTU/h | 11,500 BTU/h to 30,500 BTU/h | 10,600 BTU/h to 36,400 BTU/h | 16,610 BTU/h to 43,021 BTU/h | 16,610 BTU/h to 43,021 BTU/h |
| Maximum heat output (dry cordwood)                            | 75,000 BTU/h                 | 75,000 BTU/h                 | 65,000 BTU/h                 | 95,000 BTU/h                 | 95,000 BTU/h                 |
| Approximate burn time <sup>(1)</sup>                          | 9 hours                      | 9 hours                      | 7 hours                      | 10 hours                     | 10 hours                     |
| Emissions; weighted average according to EPA tests            | 4.4 g/h                      | 4.4 g/h                      | 4.0 g/h                      | 1.6 g/h                      | 1.6 g/h                      |
| Optimum efficiency                                            | 75%                          | 75%                          | 75%                          | 69.7%                        | 69.7%                        |
| Door opening dimensions (W x H)                               | 25 1/2" x 10 3/4"            | 25 1/2" x 10 1/4"            | 21 7/8" x 10 5/8"            | 33" x 12 3/4"                | 33" x 12 3/4"                |
| Firebox dimensions (W x D)                                    | 20 7/8" x 13"                | 20 1/4" x 12 7/8"            | 19 1/8" x 12 7/8"            | 25 3/8" x 17 7/8"            | 25 3/8" x 17 7/8"            |
| Firebox volume (excluding grate or andirons)                  | 2.5 cu. ft.                  | 2.5 cu. ft.                  | 2.3 cu. ft.                  | 4.28 cu. ft.                 | 4.28 cu. ft.                 |
| Glass viewing area (W x H)                                    | 24 3/8" x 12 5/8"            | 25 1/8" x 11 1/4"            | 21" x 11 1/2"                | 29 3/4" x 13"                | 29 3/4" x 14 3/4"            |
| Door type                                                     | Single, with steel frame     | Single, with steel frame     | Single, with steel frame     | Double, with cast iron frame | Double, with cast iron frame |
| Maximum log length                                            | 21"                          | 21"                          | 18"                          | 25"                          | 25"                          |
| Log positioning                                               | East / West                  | East / West                  | East / West                  | East / West                  | East / West                  |
| Flue spigot diameter                                          | 6" *                         | 6"                           | 6"                           | 8"                           | 8"                           |
| Minimum chimney height (from floor)                           | 15'                          | 15'                          | 15'                          | 15'                          | 15'                          |
| Glass type                                                    | Ceramic glass                | Ceramic glass                | Ceramic glass                | Ceramic glass                | Ceramic glass                |
| Fresh air intake adapter (diameter)                           | Yes (3" or 4")               | Yes (4")                     | Yes (4")                     | Yes (5")                     | Yes (5")                     |
| Warranty                                                      | Limited lifetime             | Limited lifetime             | Limited lifetime             | Limited lifetime             | Limited lifetime             |
| Test standard - Safety                                        | ULC-S610 / UL127             | ULC-S610 / UL127             | ULC-S610 / UL127             | ULC-S610 / UL127             | ULC-S610 / UL127             |
| Test standard - Emissions                                     | EPA Méthode 28               | EPA Méthode 28               | EPA Méthode 28               | EPA / ASTM WK47329           | EPA / ASTM WK47329           |
| Clearances to combustible materials                           |                              |                              |                              |                              |                              |
| Back wall                                                     | 0"                           | 0"                           | 0"                           | 0"                           | 0"                           |
| Sides                                                         | 0"                           | 0"                           | 0"                           | 0"                           | 0"                           |
| Floor                                                         | 0"                           | 0"                           | 0"                           | 0"                           | 0"                           |
| Combustible shelf (from the base of fireplace)                | 58"                          | 48"                          | 48" **                       | N/A                          | N/A                          |
| Side mantle <sup>(2)</sup>                                    | 5 5/8"                       | 5 5/8"                       | -                            | 8"                           | 8"                           |
| Side wall <sup>(3)</sup>                                      | 24"                          | 24"                          | 16"                          | 24"                          | 24"                          |
| Non-combustible surround (top)                                | 18"                          | Up to 80" ***                | Up to 84" ***                | Up to 84" ***                | Up to 84" ***                |
| Non-combustible surround (sides)                              | 1 1/4"                       | 0"                           | 0"                           | 3 1/16"                      | 3 1/16"                      |
| Exterior dimensions and weight                                |                              |                              |                              |                              |                              |
| Height                                                        | 47 1/8"                      | 47 1/8"                      | 36 1/2"                      | 43 3/8"                      | 43 3/8"                      |
| Width                                                         | 37 7/8"                      | 37 3/4"                      | 37 3/4"                      | 50 3/4"                      | 50 3/4"                      |
| Depth                                                         | 29 5/8"                      | 27 3/4"                      | 29 7/8"                      | 32 1/4"                      | 32 1/2"                      |
| Weight                                                        | 184 kg (405 lb)              | 194 kg (427 lb)              | 192 kg (423 lb)              | 247 kg (545 lb)              | 247 kg (545 lb)              |
| Steel door overlay(s); painted black or brushed nickel plated | Optional                     | N/A                          | Optional                     | N/A                          | N/A                          |
| Blower with variable speed                                    | Standard                     | N/A                          | Optional                     | Standard                     | Standard                     |
| Hot air gravity distribution kit (diameter)                   | Optional (8")                | Mandatory (8")               | Optional (7")                | N/A                          | N/A                          |
| Forced air distribution kit (diameter)                        | Optional (6")                | Optional (6")                | Optional (6")                | Optional (6")                | Optional (6")                |
| Hot air circulation grille – modern style                     | N/A                          | N/A                          | N/A                          | Optional                     | Optional                     |
| Firescreen kit                                                | Optional                     | Optional                     | Optional                     | N/A                          | N/A                          |
| 6" x 25' insulated flex pipe for forced air distribution kit  | Optional                     | Optional                     | Optional                     | Optional                     | Optional                     |

<sup>(1)</sup> Approximate burn time and maximum recommended area may vary subject to location in home, chimney draft, chimney diameter, locality, heat loss factors, climate, fuels and other variables. <sup>(2)</sup> Subject to a maximum protrusion - see owner's manual. <sup>(3)</sup> From door opening. \*May also be installed with a 7" chimney. See owner's manual for more details. \*\*\*From the base of fireplace.

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

# Manufacturers, brands and types of approved chimneys



| MANUFACTURERS*                         | BRANDS                | TYPE           | FP1LM | FP2 | FP5 | FP7CB | FP10 | FP11 | FP12 | FP14 | FP15 | FP15A | FP16 |
|----------------------------------------|-----------------------|----------------|-------|-----|-----|-------|------|------|------|------|------|-------|------|
| Olympia Chimney / SBI Venting Division | Ventis                | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| SBI Venting Division                   | Nexvent               | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| American Metal                         | HSS                   | AC Triple Wall | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| American Metal                         | HS                    | AC Triple Wall | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| ICC                                    | Excel 2100            | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    |      |       |      |
| DuraVent                               | DuraTech              | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    |      |       |      |
| DuraVent                               | DuraTech Canada (DTC) | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    |      |       |      |
| DuraVent                               | DuraPlus HTC          | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| DuraVent                               | DuraPlus              | AC Triple Wall | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| DuraVent                               | DuraTech Premium      | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| Metal Fab                              | Temp Guard            | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    |      |       |      |
| Security Chimney                       | ASHT+                 | 1" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    |      |       |      |
| Security Chimney                       | S-2100 +              | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| Selkirk                                | UltimateOne           | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Ultra-Temp (UT)       | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Super Pro (SPR)       | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Super Vent (JSC)      | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Hart & Cooley (TLC)   | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Sure-Temp (ST)        | 1" Solid Pack  |       | x   | x   | x     | x    | x    |      |      |      |       |      |
| Selkirk                                | Super Vent 2100 (JM)  | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| Selkirk                                | CF Sentinel (CF)      | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |
| Selkirk                                | Super Pro 2100 (ALT)  | 2" Solid Pack  | x     | x   | x   | x     | x    | x    | x    | x    | x    | x     | x    |

\*Specific components may be required depending on the chimney manufacturer.

Technical data contained in this catalogue are for reference only. Any installation must be done according to the data and drawings detailed in the owner's manual.

# Fireplace accessories

Valcourt offers a range of distinct and exceptional quality fireplace tool sets, to feed and maintain your fire.



# Fireplace tool set



AC02620

## DUPLEX



AC02621

## INEO



AC02622

## PAPYRUS



AC02350

## EQUISS



AC02628

## NORDIK

*New*



AC02629

## PETALE

*New*



AC02630

## FOREST

*New*



AC02631

## SPEKTRA

*New*

Contains four instruments: poker, broom, shovel and clamp. The clean lines and combination of steel and wood construction make a strong contemporary design statement.

Height of accessories:  
19 1/2" (50 cm)

Made in France.

Contains four instruments: poker, broom, shovel and clamp. The clean lines and simplicity make a strong contemporary design statement.

Height of accessories:  
19 1/2" (50 cm)

Made in France.

Contains four instruments: poker, broom, shovel and clamp. The dramatic use of steel makes a strong contemporary design statement.

Height of accessories:  
19 1/2" (50 cm)  
Dimensions of base:  
7 1/2" (19 cm)

Made in France.

Made of high quality steel. Its integrated handles make handling easier. Two identical parts that intersect easily. Assembly and disassembly in seconds for compact storage.

Height: 15 1/4" (38 cm)  
Length: 24 1/4" (61 cm)  
Depth: 13" (33 cm)  
Weight: 28 1/2 lb (13 kg)

Made in Canada.

Contains four accessories: poker, broom, shovel and tongs. Its wooden base and steel structure gives it an industrial look, perfect for contemporary or rustic spaces.

Support height:  
21 7/8" (53 cm)  
Dimensions of base:  
9 1/2" (24 cm) x 4 3/4" (12 cm)

Made in France.

Contains four accessories: poker, broom, shovel and tongs. A nice option for those who want to camouflage tools for a more decorative look.

Height:  
20" (51 cm)  
Diameter:  
7 1/2" (19 cm)

Made in France.

Contains four accessories: poker, broom, shovel and tongs. A beautiful addition to your rustic decor, both for the cottage and at home, thanks to its forest relief.

Height:  
20" (51 cm)  
Diameter:  
7 1/2" (19 cm)

Made in France.

Contains four accessories: poker, broom, shovel and tongs. You will appreciate its futuristic look for a unique atmosphere.

Height:  
20" (51 cm)  
Diameter:  
7 1/2" (19 cm)

Made in France.

# Options



AC02780 (60") AC02781 (72") WASHED CEDAR  
AC02782 (60") AC02783 (72") TAVERN BROWN

AC02703 (54" x 46 3/4") AC02704 (44" x 36")  
AC02760 (50" x 18") AC02761 (70" x 20")

AC02351

## 48" WOOD STORAGE

*New*

A versatile good-looking piece of furniture.  
Finishing trim included.

Height: 16"  
Width: 48"  
Depth: 18"

\*Optional storage drawer.  
Shovel and poker are included. (AC02353)

## NON-COMBUSTIBLE MANTELS

*New*

Incredibly realistic wood-like detailing.  
Two shades: washed cedar and tavern brown.  
Two lengths: 60" and 72"  
Height: 8"  
Depth: 8"

## GLASS HEARTH PAD

This light-colored tempered glass hearth pad is particularly resistant to shocks. This glass plate is a safe and durable choice for your fireplace and will add elegance to your decor. Its manufacture is precise and neat: polished edges and non-cutting corners.

Four sizes: 50" x 18", 70" x 20", 44" x 36"  
and 54" x 46 3/4"  
Thickness: 10 mm

# Warranty

## Valcourt Limited Lifetime Warranty on Robax Ceramic Glass

The VALCOURT-SCHOTT ROBAX system is one of the highest quality glass and heater product combination on the market. This allows VALCOURT to offer a Limited Lifetime Warranty on Robax ceramic glass for all VALCOURT appliances.

Conducted consumer studies identify that people want an unobstructed view of the fire, but without compromising safety. The glass "shield" is seen as the needed protection from the fire's unpredictable aspects. VALCOURT chose the SCHOTT ROBAX solution delivering all of the benefits that a consumer wants out of a fire but without the risks associated to it.

Because the way the entire system works together (SCHOTT ROBAX ceramic glass and VALCOURT technology), it is the most efficient glass solution available in the market given its high IR transmission values and its high temperature resistance. A high IR transmission means that the heat produced inside the fire box is transferred through the glass more efficiently. The VALCOURT-SCHOTT ROBAX ceramic glass can withstand the highest temperatures of any glass on the market.

For more details go to: [www.valcourtinc.com](http://www.valcourtinc.com)

EPA

Safety tested and verified according to USA and Canada Standards by an accredited laboratory.



| DESCRIPTION                  | PARTS    |
|------------------------------|----------|
| •Welds of combustion chamber | LIFETIME |
| •Ceramic glass               | LIFETIME |
| •Burn tubes                  | LIFETIME |
| •Plating                     | LIFETIME |

## Limited Lifetime

*Valcourt*  
*The Fireplace of Your Dreams*

[www.valcourtinc.com](http://www.valcourtinc.com)

