



THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.VALCOURTINC.COM.


APPLIANCE DIMENSIONS

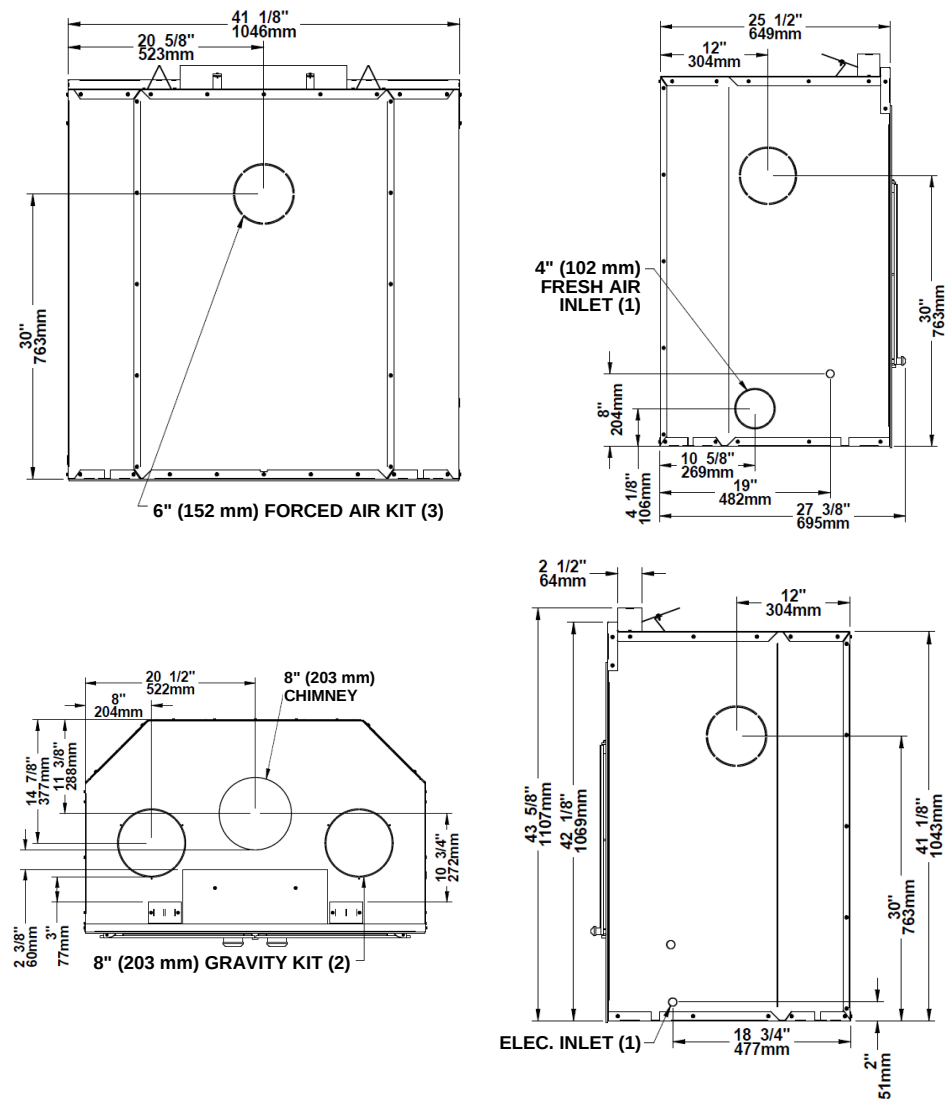

FRAMING DIMENSIONS

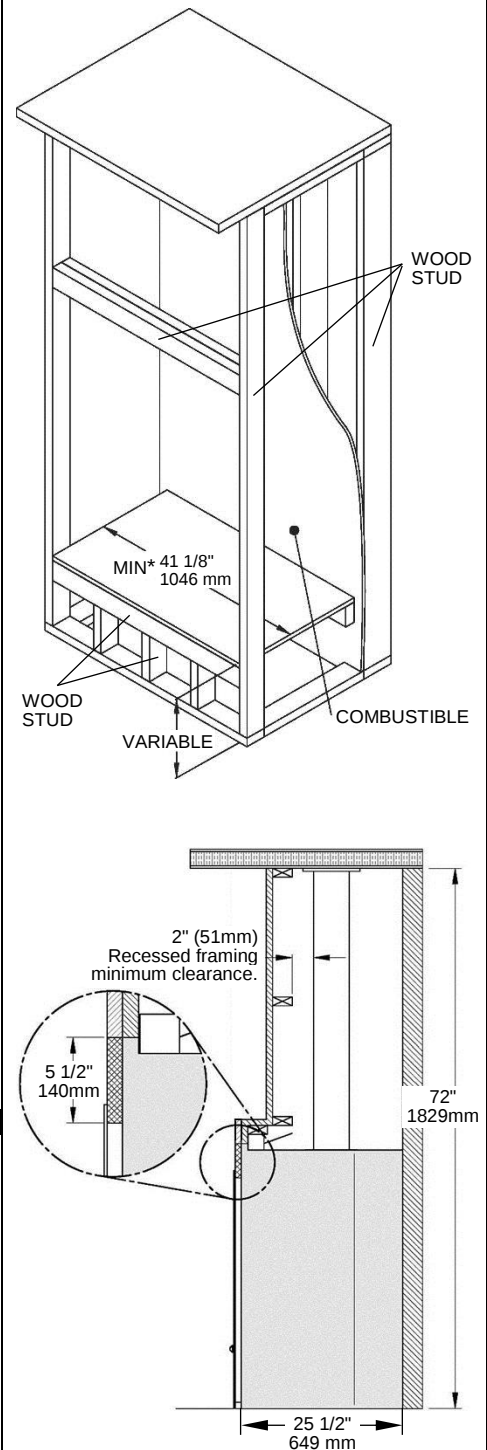

CORNER INSTALLATION

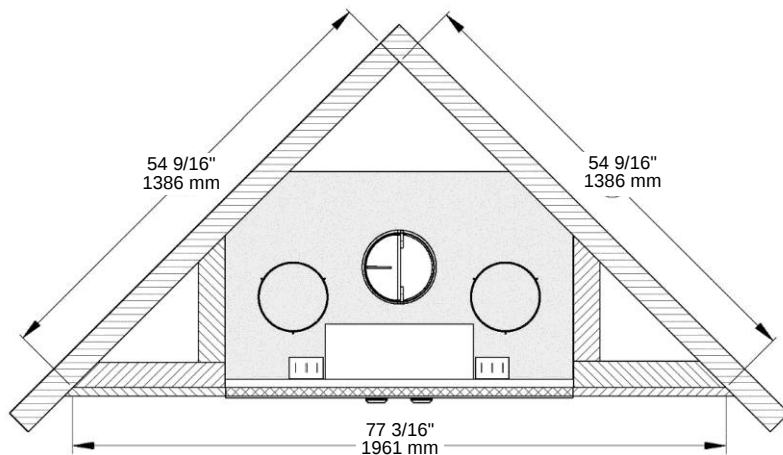


LEGEND

Combustible material allowed in this area		Non-combustible material only in this area	
---	--	--	--

* Where applicable, add 6" for fresh air pipe and/or 10" for forced air pipe to the width of the chase. When drywall panels or any other finishing material inside the chase around the fireplace is to be used, add its thickness to the measurement.


THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.VALCOURTINC.COM.

FACING MATERIAL

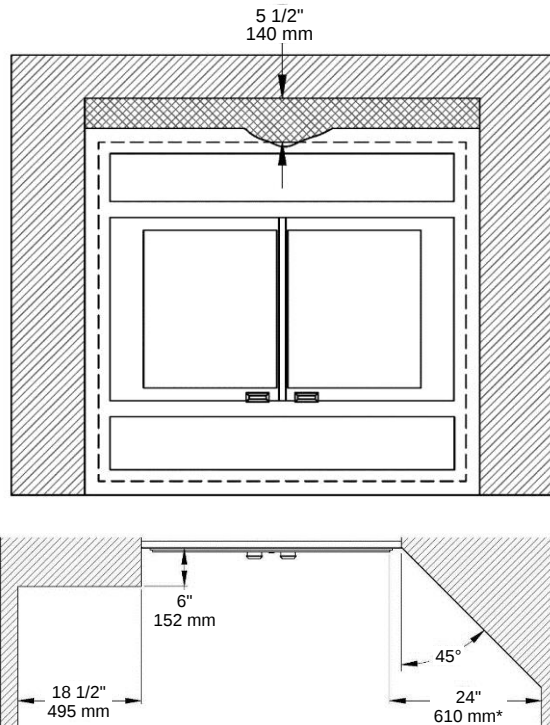


*The 24" (610 mm) minimum clearance is from door opening.

SHELF, MANTLE, AND WALL PROJECTION

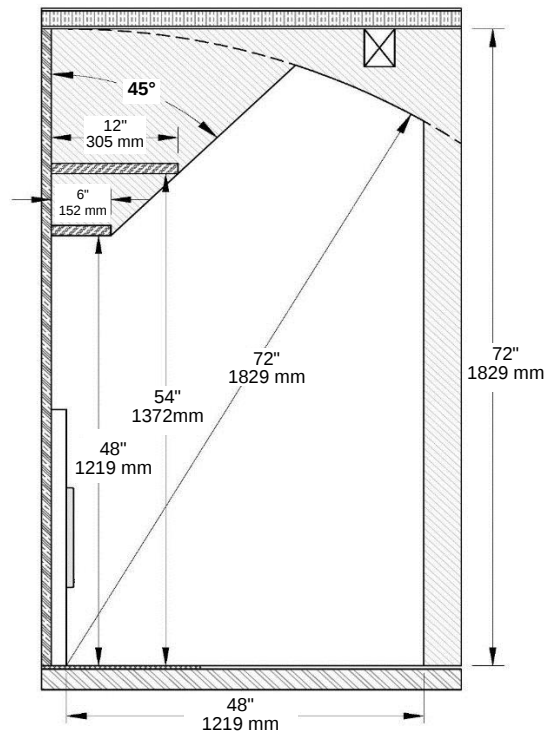


HEARTH EXTENSION CONSTRUCTION AND DIMENSIONS

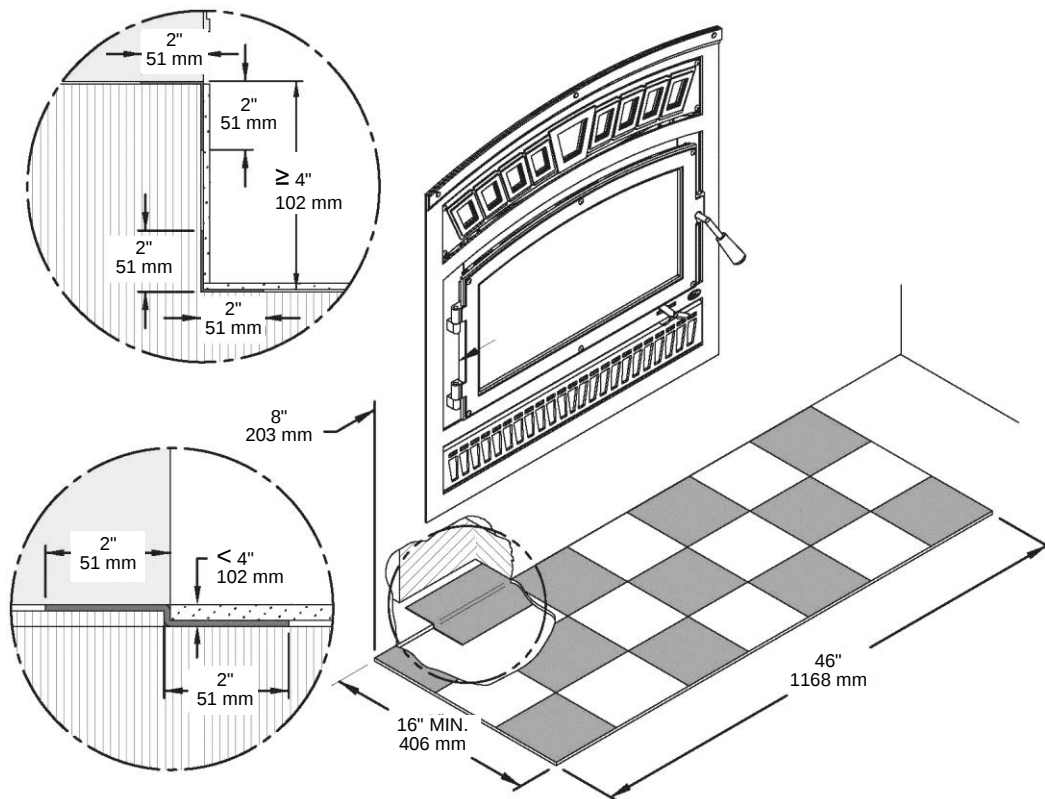

LEGEND

Combustible
material allowed
in this area



Non-combustible
material only in
this area

