



GLASS VIEWING AREA

36" W x 20-1/4" H

TECHNICAL INFORMATION

Max. Btu Input: Up to 100,000 BTU/HR

Area Heated: Up to 2,500 sq. ft.

EPA Emissions Rating (g/h, catalytic): 2.4

Fuel Capacity: 40lbs. (18kg)

Loading: Front

Fireplace weight: 741lbs.

Primary Air Control: Manual

Glass panel: High-temperature ceramic

Flue exit position: Top

Blower rating: 160 cfm (115V, 60Hz)

EPA Phase II Certified & Washington State Certified

FIELD INSTALLED ACCESSORIES





Optional Face Kits (one required):

EWF36CFTK cast iron face kit (totally covers face of unit)
with grills in Classic Black

EWF36CLK latticed cast iron grills (top and bottom) in Classic Black

Fan Kit: FK26

Sparkscreen: EWF36S

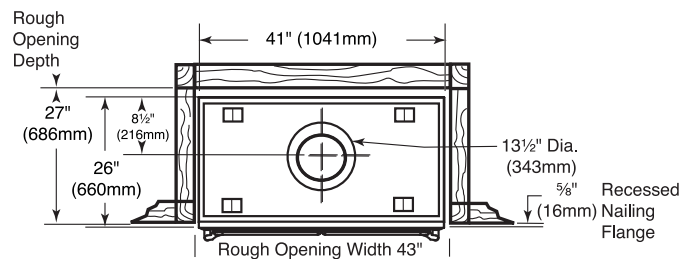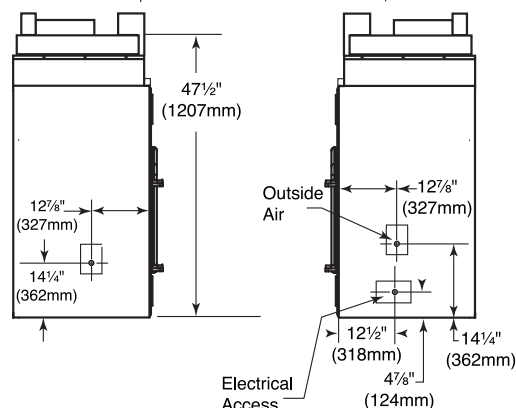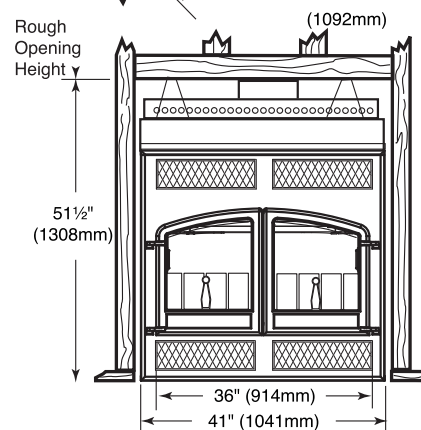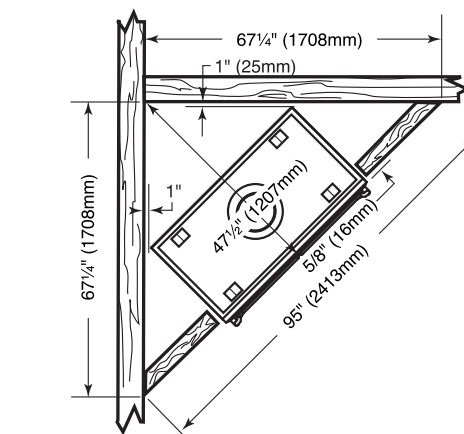

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361
www.vermontcastings.com

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable build-