

WRT4826WH

EPA Wood Burning Fireplaces Specifications



Cat. #	Model	Description
F1795	WRT4826WH	EPA Wood-Burning Fireplace

Product Reference Information	
Weight	385 lbs
Height	45"
Width	38"
Depth	24-1/2"
Chimney Weight ASHT+* (7" dia.)	7.8 lb/ft.
Chimney Weight ACBI* (8" dia.)	3.75 lb/ft.



*Available from Security Chimneys™

FRAMING DIMENSIONS		
A	38-1/4"	972 mm
B	47-3/8"	1203 mm
C	30-1/16"	764 mm
D	15-1/32"	382 mm
E	77-1/16"	1957 mm
F	38-17/32"	979 mm
G	24"	610 mm
H	23"	504 mm
J	54-1/2"	1384 mm
K	8"	203 mm
L	1"	25 mm



Framing Dimensions

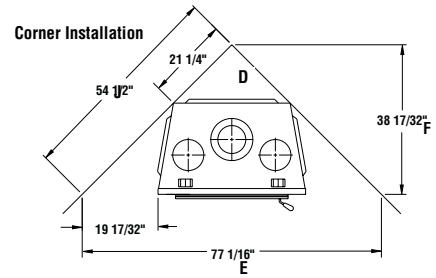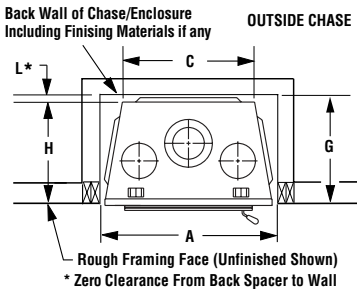

Combustible materials can NOT be used in the space directly above the fireplace. Do not fill the space above the fireplace with any material (Except the wood framing)

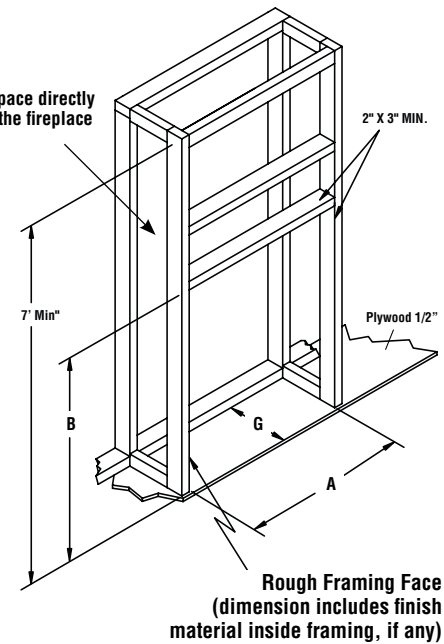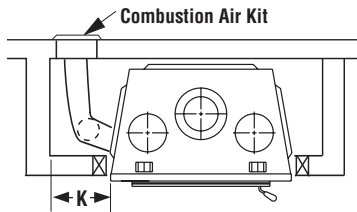

Fireplace Dimensions

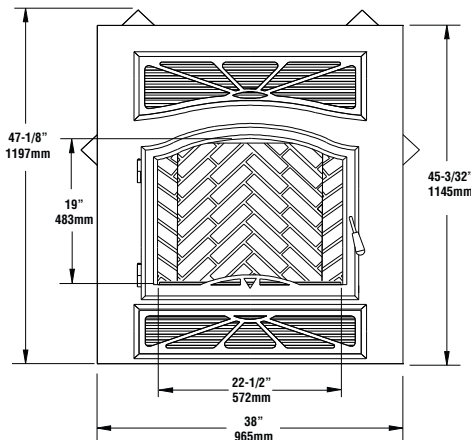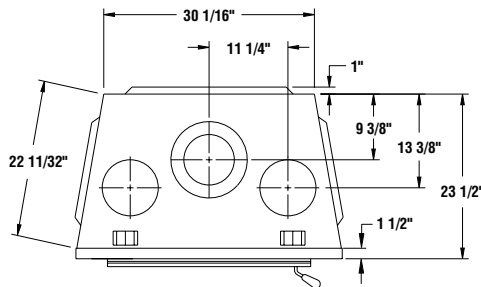

Listing Information

Notes
Diagrams, illustrations and photographs are not to scale – consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.
All framing dimensions calculated for 1/2" dry wall at the fireplace face. If sheathing the chase or finishing with other thickness materials, calculations will need to be made.
The fireplace must not be in contact with any insulation or loose filling material. Cover the insulation with Drywall panels around the fireplace.




Listed to standards:
ULC-S610 & UL-127
Report No. 192-5237

WRT4826WH

EPA Wood Burning Fireplaces Specifications

Typical Installations

ACBI CHIMNEY INSTALLATION

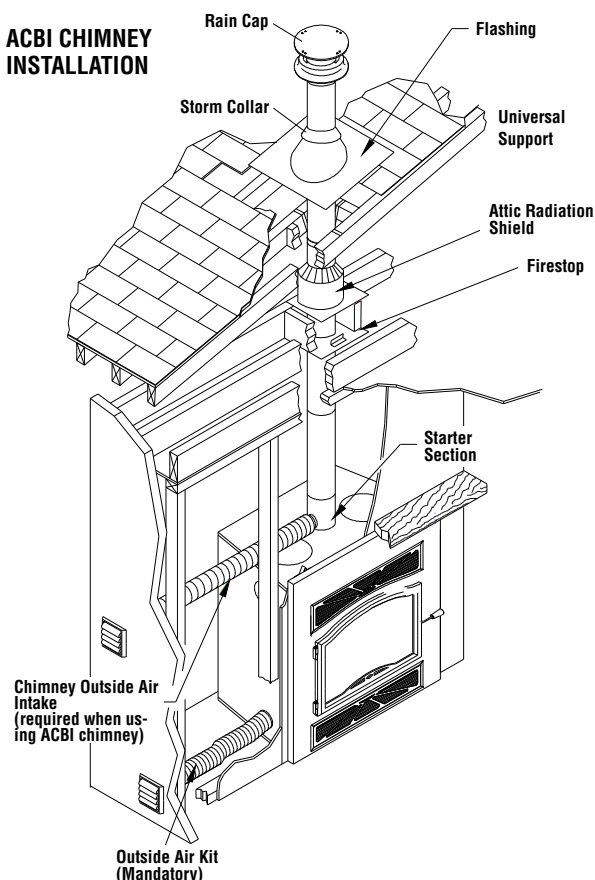

Universal Support
With Strap Attached
To Joist


Storm Collar

Flashing

Attic Radiation
Shield

Floor,
Ceiling
& Wall

NOTE: It is recommended
that the chase walls and
floor be insulated in the same
manner, using the same insula-
tion, as the rest of the building,
below the attic.

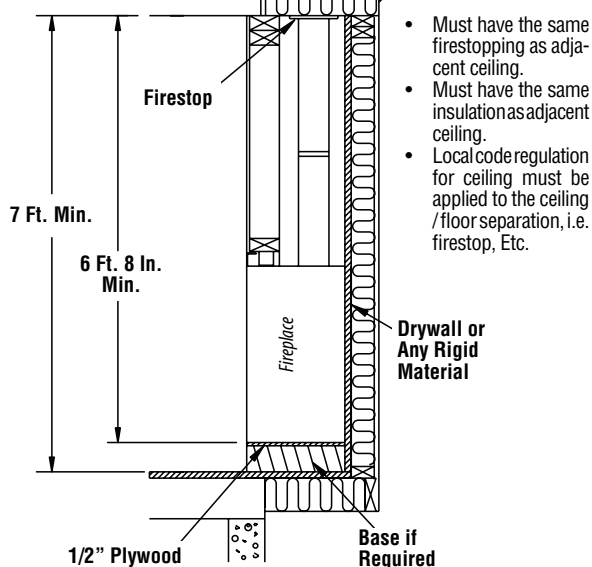

CLEARANCE TO COMBUSTIBLES

The following clearances meet the minimum requirements for
a safe installation :

Side wall: 24" (610 mm) measured from the doors edge

Ceiling: 6' 8" (2032 mm) measured from the base of the fireplace

Fireplace enclosure:

Bottom: 0"

Side: 0" to spacer

Back: 0" to spacer

Top: Do not fill the space above the fireplace with any
material (7 feet measured from the base of the
fireplace)

Chimney:

ASHT+: 2" (50mm)

ACBI: 1" (25mm) at ceiling/roof level and 2" (50mm)
through a wall

Approved Chimney Types*: Use only with listed 7 in. Diameter
Chimney, certified models ASHT+, S-2100+, HT6000+,
HT6103+ OR ACBI Chimney.

Mantel: 54" (1372 mm) measured from the base of the
fireplace or 48" (1219) when installed with Clean Face Panel
option (BPCF) and Gravity Air Kit

*Available from Security Chimneys™

